




## TECHNICAL GUIDE

Polypropylene Structured Wall Products  
BlackMAX® SewerMAX® SewerMAX+®

Version 2 – Sep 2023

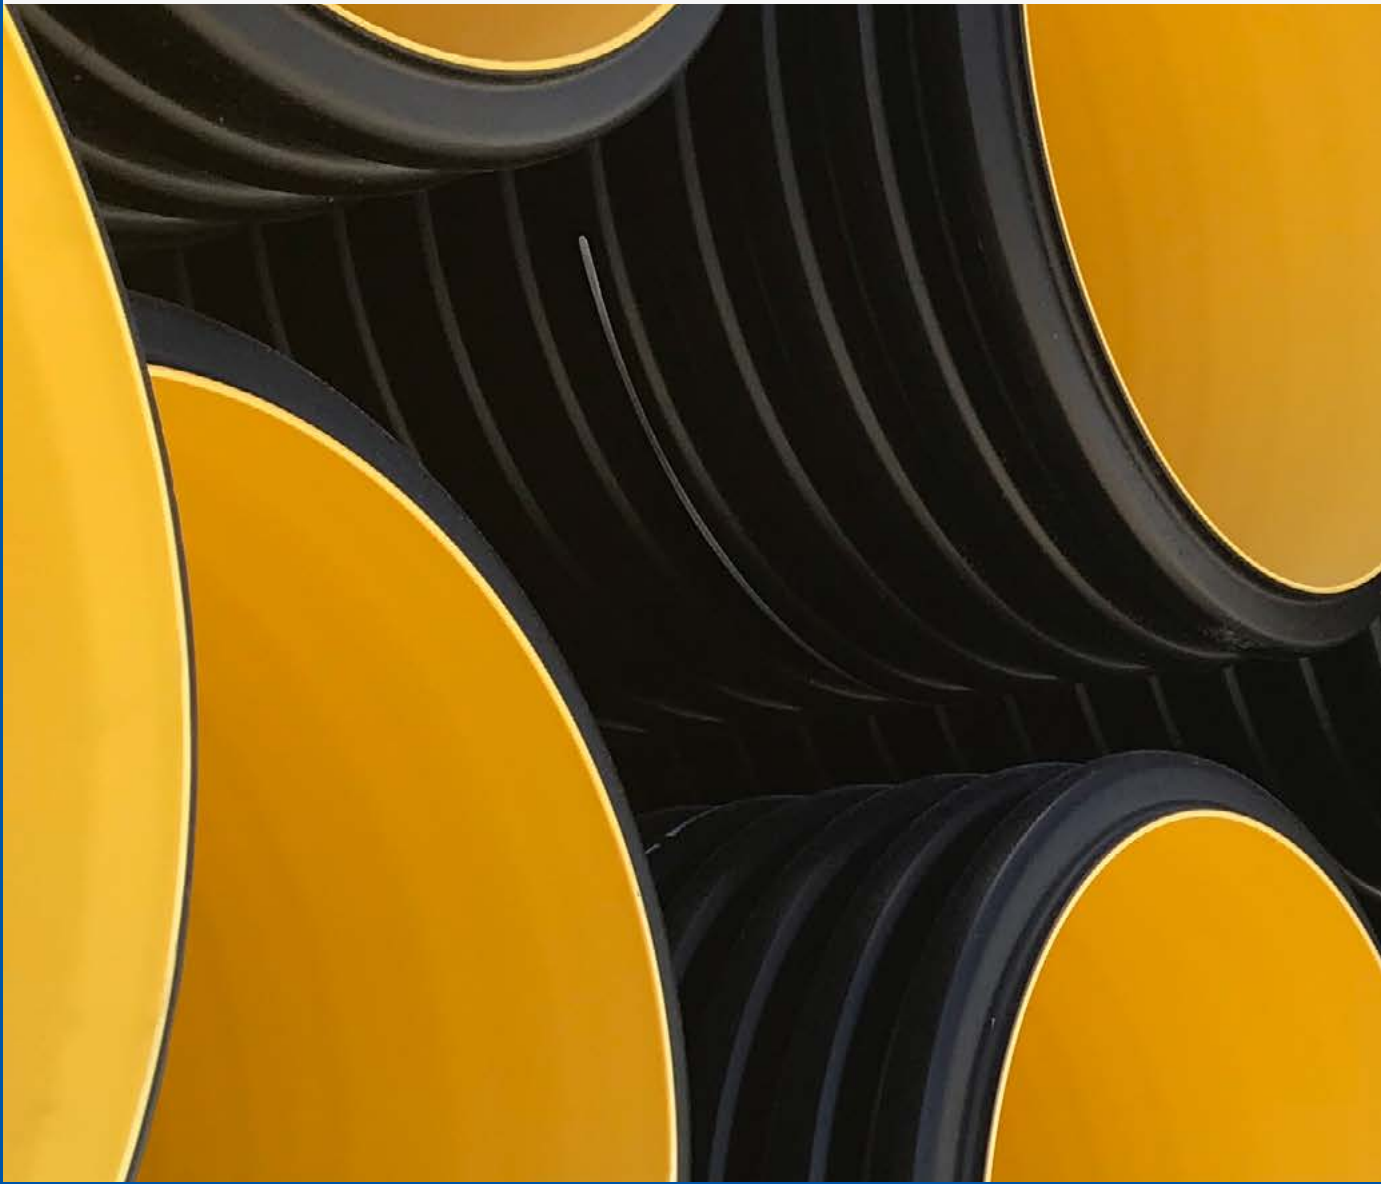

**Black**  
**MAX**

**Sewer**  
**MAX**

**Sewer**  
**MAX+**



## IMPORTANT DISCLAIMER

*This document provides technical information about the BlackMAX®, SewerMAX®, SewerMAX+® product range. It is subject to change without notice. Iplex does not provide design or other professional services and this document must not be relied upon as such. Before purchasing goods, always seek independent expert advice on the suitability of the goods for the intended purpose or their application. Any safety information is provided as a guide only and any reliance on or use of any such information is at your own risk. Except as provided in Iplex's terms and conditions of sale for these goods, and to the extent permitted by law, Iplex is not liable for any direct or indirect loss, damage or injury suffered by persons who rely on the information contained in this document. The designs, graphics, logos, trademarks (including BlackMAX®, SewerMAX®, SewerMAX+®, Iplex Pipelines® and Iplex®) and other intellectual property contained in this document are owned by or licensed to Iplex and you must not use, reproduce, or otherwise deal with the content without Iplex's prior written consent.*

**COPYRIGHT® 2023. ALL RIGHTS RESERVED.  
IPLEX PIPELINES AUSTRALIA PTY LIMITED ABN 56 079 613 308**

# CONTENTS

<b>1.0 INTRODUCTION</b>	06
1.1 MANUFACTURE	07
1.2 PRODUCT FEATURES	08
1.3 APPLICATIONS	09
<b>2.0 PRODUCT DATA</b>	10
2.1 MATERIAL PROPERTIES	11
2.2 STANDARDS	12
2.3 SERVICE EXPECTANCY	13
2.3.1 ENVIRONMENTAL PRODUCT DECLARATION	13
2.3.2 WATER SERVICES ASSOCIATION OF AUSTRALIA (WSAA) PRODUCT APPRAISAL	13
2.3.3 CHEMICAL RESISTANCE	14
2.3.4 RESISTANCE TO MICROBIOLOGICAL ATTACK	14
2.3.5 RESISTANCE TO SUNLIGHT	14
2.3.6 ABRASION RESISTANCE	14
2.3.7 OXIDATION	14
2.3.8 CORROSION	14
2.4 BLACKMAX® PIPE RANGE	15
2.4.1 BLACKMAX® FITTINGS	17
2.4.2 BLACKMAX® FITTINGS RANGE	18
2.5 SEWERMAX® AND SEWERMAX+® PIPE RANGE	29
2.5.1 SEWERMAX® FITTINGS	31
2.5.2 SEWERMAX® FITTINGS RANGE	32
2.6 PIPE JOINTING	41
2.6.1 JOINT CROSS SECTION DETAILS	41
2.6.2 RUBBER RING JOINT DESIGN AND PERFORMANCE	42
2.6.3 JOINT TIGHTNESS TESTS	43
2.6.4 PRESSURE AND VACUUM	43
2.7 PIPE STIFFNESS	43
<b>3.0 DESIGN</b>	44
3.1 HYDRAULIC PERFORMANCE	44
3.1.1 STORMWATER DRAINAGE DESIGN	51
3.1.2 VELOCITIES IN STORMWATER DRAINAGE PIPELINES - GENERAL	51
3.1.3 HIGH VELOCITIES	52
3.1.4 SEWER DESIGN	52
3.2 STRUCTURAL DESIGN	54
3.2.1 GEOTECHNICAL INVESTIGATION	57
3.2.2 DERIVATION OF SOIL DEFORMATION MODULUS VALUES	57
3.2.3 EFFECTIVE SOIL MODULUS	60
3.2.4 EFFECTS OF CONSTRUCTION LOADS ON BURIED BLACKMAX® AND SEWERMAX® (PP) PIPES	67

<b>4.0 INSTALLATION</b>	<b>68</b>
4.1 PLANNING	68
4.2 TRANSPORTATION AND STORAGE	68
4.3 UNLOADING	68
4.4 HANDLING	69
4.5 INSTALLATION GUIDELINES	71
4.6 EXCAVATION AND ASSOCIATED WORKS	71
4.6.1 TRENCH EXCAVATION	71
4.6.2 FOUNDATION	71
4.6.3 UNSTABLE AND WET GROUND CONDITIONS	71
4.6.4 TRENCH SHIELDS	72
4.7 PIPE LAYING	73
4.7.1 BEDDING	73
4.7.2 JOINTING OF PIPES	73
4.7.2.1 PIPE CUTTING	75
4.8 PIPE SIDE SUPPORT AND OVERLAY	75
4.8.1 EMBEDMENT - HAUNCHING AND SIDE SUPPORT	75
4.8.2 OVERLAY	76
4.9 TRENCH & EMBANKMENT FILL	76
4.9.1 MONITORING DIAMETRAL DEFLECTIONS	76
4.10 BORE CASING	76
4.10.1 GROUTING	77
4.11 JOINTING TO RIGID STRUCTURES	77
4.11.1 RELATIVE SETTLEMENT	77
4.11.2 PIPE TO CONCRETE INTERFACE	77
4.11.3 CONNECTION FOR INCOMING SIDELINES	79
4.11.3.1 SEWERMAX® JUNCTIONS	79
4.11.3.2 STORMWATER SADDLES	80
4.12 REPAIR METHODS	80
4.12.1 FOR MINOR REPAIRS	80
4.12.2 MAJOR REPAIRS	81
<b>5.0 FIELD ACCEPTANCE TESTING</b>	<b>82</b>
5.1 LEAKAGE TESTING	82
5.1.1 HYDROSTATIC (EX-FILTRATION) TESTING	82
5.1.2 LOW PRESSURE AIR (EXFILTRATION) TESTING	83
5.1.3 INFILTRATION TESTING	84
5.2 STRUCTURAL ASSESSMENT	84
5.2.1 DEFLECTION TESTING	84
5.2.2 PROVER DESIGN	84



*BlackMAX® pipes cut to length during manufacturing process*

## 1.0 INTRODUCTION

Iplex is a major Australian manufacturer and supplier of plastic pipes and fittings suitable for civil, plumbing, irrigation, industrial and mining applications. As a leader in plastic pipe technology, Iplex was continued to develop innovative products offering solutions for the demanding service and environmental needs of today. To meet these requirements, Iplex has introduced BlackMAX® for stormwater drainage and low head irrigation and SewerMAX® for gravity sewer pipelines.

BlackMAX® and SewerMAX® are cost-effective alternatives to conventional pipe systems, with improved performance and exceptional durability. They are corrosion and abrasion resistant, which severely limit the life of more conventional materials.

The profile wall structure provides an efficient use of material, producing a pipe with high ring stiffness and low mass. As a result, pipes are only a fraction of the weight of conventional materials and can readily withstand both installation and service loads. Figure 1.1 illustrates the wall cross-section.

Both BlackMAX® and SewerMAX® pipes are manufactured in diameters DN225 up to DN1200\*.

BlackMAX® pipes are manufactured in SN8 and SewerMAX® pipes in SN10.

Heavy walled SewerMAX+® pipes are manufactured in diameters DN225 up to DN525 in SN20.

The contents of this document outline the scope of use of the BlackMAX®, SewerMAX® and SewerMAX+® product.


\*Sizes DN750 to DN1200 scheduled to start manufacturing in 2024. For further information contact Iplex Pipelines.




## 1.1 MANUFACTURE

BlackMAX® and SewerMAX® pipes are manufactured using a combined continuous extrusion and vacuum moulding process. The polypropylene pipe wall structure is comprised of a solid smooth inner wall and profiled outer wall. The inner and outer walls are extruded simultaneously and fused together circumferentially at the trough of each corrugation. This innovative construction results in a high-stiffness pipe with a smooth inner bore which can be cut and re-joined anywhere along its length.


BlackMAX® and SewerMAX® pipes and fittings are manufactured to Australian and New Zealand Standard, AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications' and carry StandardsMark™ and WaterMark third party product certifications under this standard.

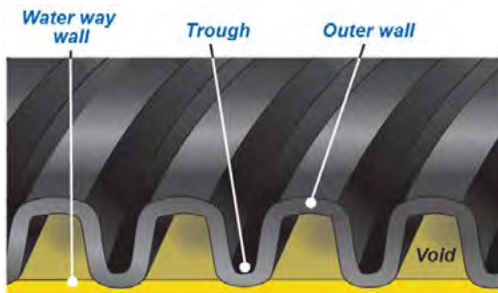

- BlackMAX® pipes with a black outer wall and yellow internal liner
- Pipe classification SN8
- Standard lengths 3m and 6m nominal

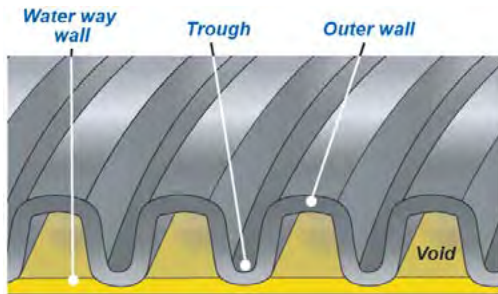

- SewerMAX® pipes with a grey outer wall and yellow internal liner
- Pipe classification SN10
- Standard lengths 3m nominal

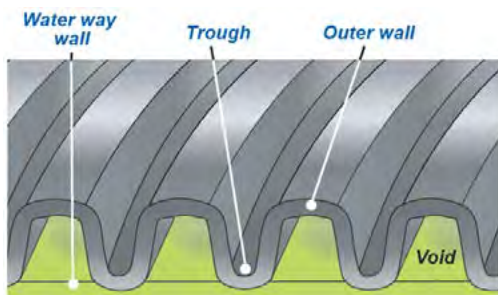

- SewerMAX+® pipes with a grey outer wall and light green internal liner
- Pipe classification SN20
- Standard lengths 3m nominal

Figure 1.1 Cross sections of Iplex PP structured wall pipe systems

A range of fittings is available for use with BlackMAX® and SewerMAX® pipes providing a complete system. Fittings are moulded and/or fabricated from PP or PVC-U pipe sections.





*Prefabricated DN450 SewerMAX® Bend ready for despatch*



*Prefabricated DN450 BlackMAX® Bend ready for despatch*

## 1.2 PRODUCT FEATURES

Throughout Australia, BlackMAX® and SewerMAX® have been chosen for their unique characteristics, material properties and benefits.

### 1. RESISTANCE TO CHEMICAL ATTACK

BlackMAX® and SewerMAX® pipes are manufactured from polypropylene, providing excellent resistance in corrosive drainage, sewerage, and industrial wastewater applications. The material is resistant to aggressive ground conditions, such as acid sulphate soils or saline ground waters.

### 2. RESISTANCE TO ABRASION

Polypropylene is notably resistant to abrasion and can be used in industrial and mining applications, handling slurries with high solids content.

### 3. LIGHTWEIGHT

BlackMAX® and SewerMAX® pipes are lightweight compared with concrete pipes and can be easily manoeuvred in confined areas by hand or with light lifting equipment improving site efficiency and savings during installation.

### 4. LONG LENGTHS

BlackMAX® pipes are manufactured in standard 3 metre and 6 metre nominal lengths, allowing efficient laying rates in shallow trenching.

### 5. SHORT LENGTHS FOR DEEP TRENCHING

SewerMAX® pipes are manufactured in standard 3 metre nominal effective lengths for ease of handling in deep sewers with trench shields.

### 6. FLOW CHARACTERISTICS

The smooth bore of BlackMAX® and SewerMAX® pipes, combined with their high resistance to scale and sediment build up provides excellent hydraulic performance. This can result in increased capacity or reduced grades to accomplish a given flow.

### 7. IN-GROUND PERFORMANCE

BlackMAX® and SewerMAX® pipes have a high tolerance to deformation and can resist soil movement without structural damage or cracking.

### 8. DURABILITY

The tough, ductile nature of polypropylene enables BlackMAX® and SewerMAX® pipes to resist accidental impact damage during transportation and site handling.

### 9. WEATHERING RESISTANCE

BlackMAX® pipes contain a minimum of 2% carbon black and SewerMAX® pipes contain a minimum 0.2% HALS UV light stabilizer. In both cases these additives are used to allow storage of pipes in sunlight without undue degradation.

### 10. RUBBER RING JOINT

The BlackMAX® and SewerMAX® rubber ring joint is designed for ease of assembly and jointing. Pipes can be cut anywhere along the pipe length for onsite length adjustments.



## 1.3 APPLICATIONS

BlackMAX® and SewerMAX® pipes and fittings are suitable for a range of applications including:

- Stormwater drainage pipelines
- Road culverts
- Gravity Sewer mains
- Low head Irrigation
- Rehabilitation (as liner pipe)
- Ventilation ducts
- Leachate collection
- Stormwater retention systems
- Estuarine and Ocean outfalls



*DN600 BlackMAX® stormwater drainage pipes installed under roadway*



*DN600 SewerMAX® pipes in 3m lengths are easily lowered in deep trenching*



## 2.0 PRODUCT DATA

### POLYPROPYLENE MATERIALS

#### – GENERAL

Polypropylene is a high-quality material which has been used since the 1950's. Polypropylene was first used for sewer pipe production in the 1970's. Polypropylene's intrinsic properties of high stiffness, tensile strength and inertness towards acids, alkalis and solvents has secured its position in a wide range of industrial applications.

High impact resistance and stiffness combined with chemical resistance and temperature performance make polypropylene suitable for sewerage applications. Throughout the Middle East, Europe and Oceania, Water Authorities are turning away from concrete and clay to plastics for their sewer systems. The major concern is sulphuric erosion and acid developed inside sewers. Plastics such as polypropylene are highly resistant in these environments and are often used by engineers to line concrete sewers.

Polypropylene pipes such as SewerMAX® and BlackMAX® are also highly resistant to abrasion making them suitable for a broad range of applications including gravity sewer, stormwater drainage and mining. The rate of abrasive wear of the pipe wall will be dependent upon the velocity and quantity of flow and the size and shape of the particles in the sewer, stormwater, or slurries. In highway drainage, flow rates can vary from a few m/s to 7-10 m/s. Darmstadt abrasion tests demonstrated polyolefin pipes had low abrasion compared with other materials due to their low surface roughness.

The smooth inner bore of BlackMAX® and SewerMAX® pipes allows excellent hydraulic capacity even at low gradients and helps prevent encrustation and pipe blockages.



*SewerMAX+® pipes packed and ready for despatch*

## 2.1 MATERIAL PROPERTIES

BlackMAX® and SewerMAX® pipes are manufactured from block (heterophasic) copolymer polypropylene, which is a thermoplastic of the polyolefin group. Polypropylene is noted for its excellent chemical resistance, high modulus, and elevated temperature performance.

**TABLE 2.1 PHYSICAL PROPERTIES OF BLACKMAX® AND SEWERMAX® POLYPROPYLENE PIPES**

Property	Value	Standard/Reference
Density of Pipe Compound	900 kg/m <sup>3</sup>	ISO 1183
Circumferential Flexural Modulus (2mm/min)	1300 MPa	ISO 178
Creep ratio (2 years)	3	ISO 9967
Circumferential Flexural Creep Modulus (2 years)	433 MPa	ISO 9967
Circumferential Flexural Creep Modulus (50 years)	342 MPa	ISO 9967
Pipe Ring Bending Stiffness - BlackMAX®	≥ 8000 N/m/m	AS/NZS 1462.22
Pipe Ring Bending Stiffness - SewerMAX®	≥ 10000 N/m/m	AS/NZS 1462.22
Pipe Ring Bending Stiffness – SewerMAX+®	≥ 20000 N/m/m	AS/NZS 1462.22
Flexural Yield Stress	24.5 MPa	ISO 178
Tensile Yield Stress (50mm/min)	28 MPa	ISO 527-2
Tensile Yield Strain (50mm/min)	6%	ISO 527-2
Poisson's Ratio	0.45	ISO 527-2
Thermal Co-efficient of Linear Expansion	15 X 10 <sup>-5</sup> / °C	DIN 53752
Shore D Hardness	60	ISO 868
Pipe - Allowable Long-Term Deflection	7.5%	AS/NZS 2566.1
Pipe - Allowable Long-Term Ring Bending Strain	4%	AS/NZS2566.1





## 2.2 STANDARDS

The following standards relate to the manufacture, testing, design, and installation of BlackMAX® and SewerMAX® pipes and fittings.

### Standard

AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'

EN13476 Plastics piping systems for non-pressure underground drainage and sewerage - Structured-wall piping systems of unplasticized poly(vinyl chloride) (PVC-U), polypropylene (PP) and polyethylene (PE) - Part 3: Specifications for pipes and fittings with smooth internal and profiled external surface and the system, Type B

AS/NZS 1260 'PVC-U pipes and fittings for drain, waste, and vent applications' Section 3.4 Tests on elastomeric joints

AS/NZS 1462.8 'Methods of test for plastics pipes and fittings Method 8: Method of testing the leak tightness of assemblies'

AS/NZS 1462.10 'Methods of test for plastics pipes and fittings Method of hydrostatic pressure testing of fittings and elastomeric seal joints for non-pressure applications'

AS/NZS 1462.13 'Methods of test for plastics pipes and fittings Method for the determination of elastomeric seal joint contact width and pressure'

AS/NZS 1462.22 'Methods of test for plastics pipes and fittings Method for the determination of pipe stiffness'

AS 1646 'Elastomeric seals for waterworks purposes'

AS 2200 'Design charts for water supply and sewerage'

AS/NZS 2566.1 'Buried flexible pipelines - Part 1: Structural design'

AS/NZS 2566.2 'Buried flexible pipelines - Part 2: Installation'

DR AS/NZS 2033 Installation of Polyolefin pipe systems

AS 4181 'Repair and off-take clamps for water industry purposes'

ISO 9967 'Thermoplastics pipes - Determination of creep ratio'

AS/NZS ISO 9001 'Quality management systems - requirements'

ISO 14025 'Environmental labels and declarations - Type III environmental declarations - Principles and procedures'

EN 15804 'Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products'



*SewerMAX+® PP pipes under Creep test in accordance with ISO 9967*



*BlackMAX® PP pipe stiffness test in accordance with AS/NZS 5065*

## 2.3 SERVICE EXPECTANCY

In determining the life expectancy of a buried pipe, it is necessary to consider all the potential modes of failure and assess whether there is a real risk of the pipe failing by a mechanism under consideration. Polypropylene as a pipe material has been in existence for many years. As a plastic profiled wall pipe, a service history of approximately 50 years is available. Polypropylene is an inert material, will not readily abrade in service and is not affected by high or low pH soils or saltwater environments.

BlackMAX® and SewerMAX® pipes are manufactured from block copolymer polypropylene (PP-R). These components are designed to have a service life of more than 100 years. The 'greater-than-100-year' anticipated service life is based on the following:

- Water Services Association of Australia (WSAA) undertook a comprehensive appraisal of BlackMAX® and SewerMAX® made of block co-polymer polypropylene and concluded that these products have an anticipated service life greater than 100 years.
- The convention applied by Iplex to the design of the BlackMAX® and SewerMAX® is the same as used for many years in International (ISO), Australian and European (CEN) Standards for the design of plastics pipes. The design philosophy considers the visco-elastic behaviour of plastics together with the mechanical and chemical properties of the material.
- If the design and installation is in accordance with the relevant standards and manufacturer's advice, BlackMAX® and SewerMAX® pipes have a life expectancy more than 100 years before major rehabilitation. The life expectancy is a guide only and may increase or decrease because of the system operating conditions, operating environment, and other geographical and site-specific factors.

### 2.3.1 ENVIRONMENTAL PRODUCT DECLARATION

An Environmental Product Declaration (EPD) is a standardised and verified way of quantifying the environmental impacts of a product based on a consistent set of rules known as PCR (Product Category Rules).

The Environmental Product Declaration (EPD) for BlackMAX® and SewerMAX® polypropylene pipes:

- Conforms with International Standards ISO14025 and EN15804.
- Has been verified by an independent third party.
- Has at least a cradle to gate scope.
- Has product specific results.

The BlackMAX® and SewerMAX® polypropylene pipes EPD results can be used in Whole of life Cycle assessments under Green Star rating tools. Refer to the Tables in the BlackMAX® and SewerMAX® Environmental Product Declaration (EPD) to convert the product results from kilogram of installed pipe to length of pipe for individual pipe products.

### 2.3.2 WATER SERVICES ASSOCIATION OF AUSTRALIA (WSAA) PRODUCT APPRAISAL

The Water Services Association of Australia (WSAA) is the peak body of the Australian urban water industry and represents the major water agencies and authorities throughout Australia.

Australian water agencies require pipe systems used for water, sewerage and drainage to have a realistic life expectancy of at least 100 years. BlackMAX®, SewerMAX® and SewerMAX+® have been appraised by WSAA and deemed to meet this requirement.

### 2.3.3 CHEMICAL RESISTANCE

BlackMAX® and SewerMAX® pipes are made from a copolymer of polypropylene (PP-B). The elastomeric seals used to join the pipes are made from styrene butadiene rubber (SBR).

Polypropylene is inherently resistant to a wide range of chemicals such as acids, alkalis, salts, wetting agents, and alcohols.

SBR seals are also resistant to a wide range of chemicals such as salt solutions, alkalis, glycols, and some alcohols.

Further reference and details about chemical resistance are available at [iplex.com.au](http://iplex.com.au).

### 2.3.4 RESISTANCE TO MICROBIOLOGICAL ATTACK

There is no evidence microbiological attack is a potential failure mechanism for polypropylene pipes.\* Polypropylene (PP) pipes are used widely for sewerage applications in most European countries.

### 2.3.5 RESISTANCE TO SUNLIGHT

BlackMAX® pipes contain a minimum of 2% carbon black and SewerMAX® pipes a minimum of 0.2% HALS light stabilizer for protection against UV radiation. These additives allow long-term storage of pipes in sunlight without degradation. Once buried, BlackMAX® and SewerMAX® pipes are not exposed to UV radiation and therefore will not degrade by this mechanism.

### 2.3.6 ABRASION RESISTANCE

Polypropylene is highly resistant to abrasion and is used for industrial and mining applications such as handling slurries with high solids content. It is also selected for several mechanical and automotive applications. Some examples are linings for truck trays, spoilers, and bumpers for cars. As polypropylene is generally accepted as having a higher resistance to abrasion than PVC, abrasion loss is an unlikely failure mode for BlackMAX® and SewerMAX® pipes.

### 2.3.7 OXIDATION

The polypropylene compound used for BlackMAX® and SewerMAX® pipes contains an antioxidant to protect against oxidation. Under normal ambient temperatures the level of protection is enough to provide more than 100 years service life if the design and installation is in accordance with the relevant standards and manufacturer's advice.

### 2.3.8 CORROSION


Polypropylene, as with other plastics, is corrosion resistant.

\*BlackMAX Structured Wall Polypropylene pipes" 29.11.2004, Dr Alan Whittle PhD Senior scientist, Iplex Pipelines Australia Pty Ltd.






## 2.4 BLACKMAX® PIPE RANGE

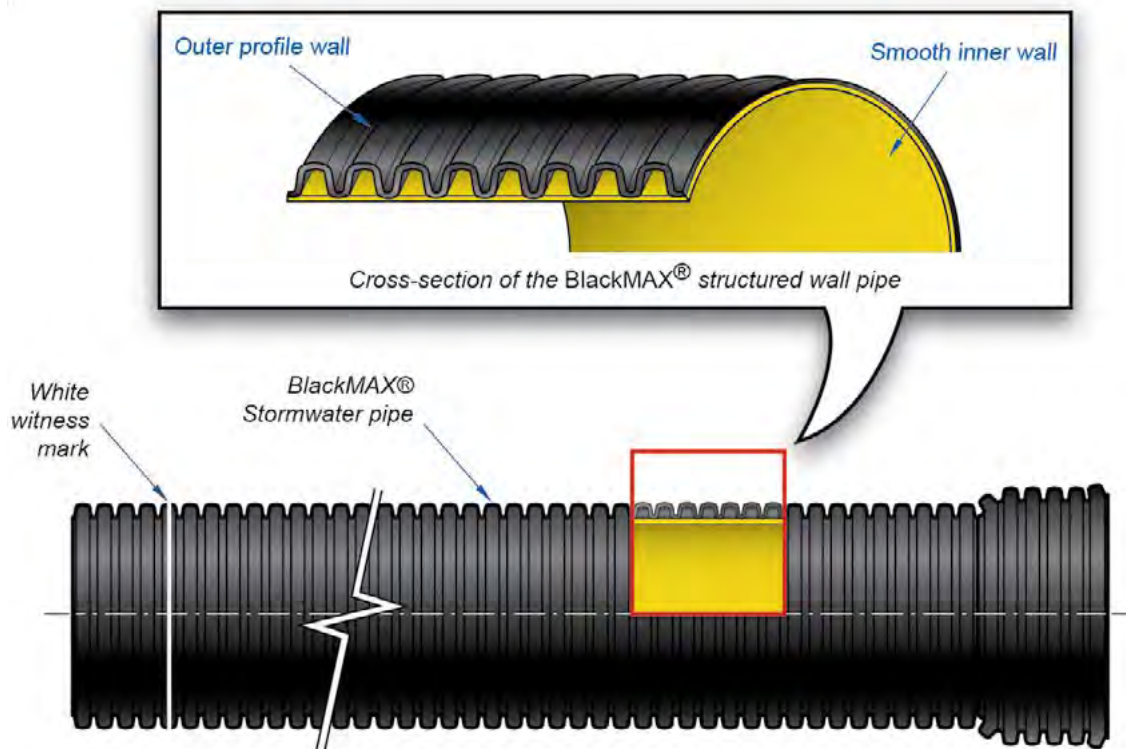

Application	Product Code	DN	SN	Nominal Length (m)	Colour Outer Wall	Colour Inner Wall
Stormwater drainage Low head irrigation (non-pressure)	GR8225	225	8	6	Black	Yellow
	GR8300	300				
	GR8375	375				
	GR8450	450				
	GR8525	525				
	GR8600	600				
	GR8750	750*				
	GR8900	900*				
	GR81000	1000*				
	GR81200	1200*				
	GR8225C	225	3 (subject to availability)			
	GR8300C	300				
	GR8375C	375				
	GR8450C	450				
	GR8525C	525				
	GR8600C	600				
	GR8750C	750*				
	GR8900C	900*				
	GR81000C	1000*				
	GR81200C	1200*				

\*Sizes DN750-DN1200 scheduled to start manufacturing in 2024. For further information contact Iplex Pipelines.

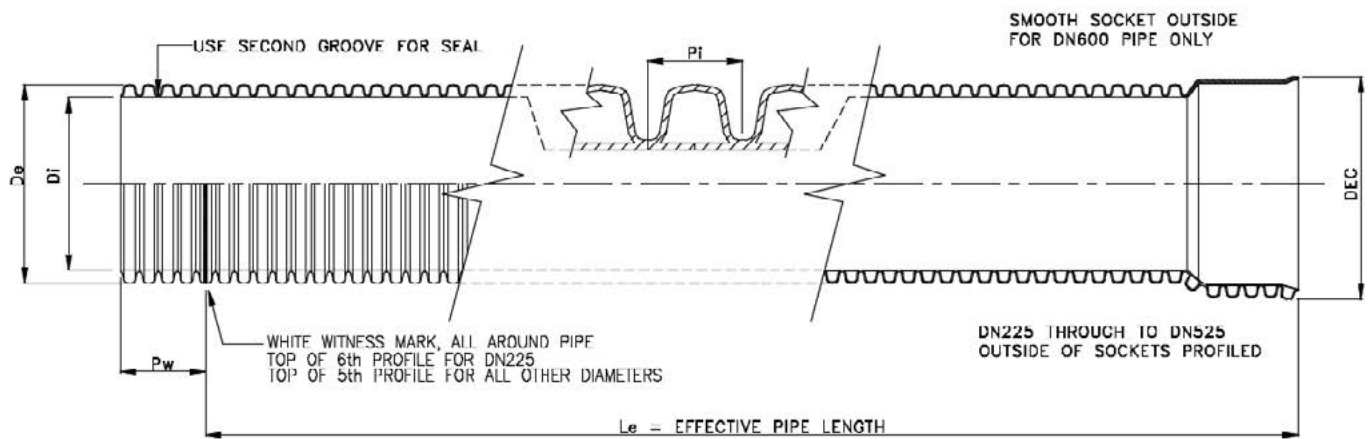**FIGURE 2.1 BlackMAX® Pipe – Longitudinal Cross-Section**

**TABLE 2.2 BlackMAX® Pipe dimensions – SN8**

DN	Mean Pipe OD $D_o$ (mm)	Min Pipe ID $D_i$ (mm)	Max Socket OD DEC (mm)	Length Witness Mark $P_w$ (mm)	Profile Pitch $P_i$ (mm)	Approx. Pipe Mass (kg/m)	Effective length $L_e$ (mm) + 30 - 0
225	259	225	305	135	24.9	4	6010
300	344	300	403	147	33.2	7	6020
375	428	373	502	176	39.8	10	6025
450	514	447	603	222	49.8	14	6030
525	600	522	704	254	56.9	17	6015
600	682	596	750	296	66.4	22	5810
750	843	736	896	319	79.7	27	6012
900	1010	877	1072	398	99.6	36	6130
1000	-	-	-	-	-	-	-
1200	1342	1170	-	-	132.8	68	-



## 2.4.1 BLACKMAX® FITTINGS



*BlackMAX® PVC Saddle in manufacture*



*BlackMAX® PVC Junction in manufacture*

A standard range of fittings for use with BlackMAX® pipes are available for a complete pipe system. Bends, tees, junctions, closed ends, couplings, plugs, reducers, saddles, and adaptors are fabricated with polypropylene BlackMAX® and PVC pipe sections.

BlackMAX® fittings comply with Australian Standard AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'.

### **FITTINGS RANGE DN225 UP TO DN375 (SECTION 2.4.2)**

Fittings Range DN225 up DN375 (Section 2.4.2) are fabricated with PVC pipe sections with moulded socket ends for rubber ring joint connection with BlackMAX® pipe spigots. All fittings are fibreglass reinforced and coloured black for identification.

### **FITTINGS RANGE DN450 UP TO DN1200 (SECTION 2.4.2)**

BlackMAX® fittings in sizes DN450 to DN1200 are fabricated with BlackMAX® PP pipe sections. Fittings are generally supplied with socketed ends suitable for rubber ring connection with BlackMAX® pipe spigots. Other end configurations are also available, such as spigot ends with

separate pipe couplings for jointing.

BlackMAX® fittings fabricated with dn100, dn150 or dn225 components are supplied with either PVC (RRJ or SWJ sockets) ends or standard solid wall polypropylene plain-ended pipe spigots (110mm OD) and (160mm OD). These components allow connections with PVC DWV pipes for stormwater drainage connections.

### **FITTINGS FOR REPAIRS (SECTION 2.5.2)**

A range of stainless-steel clamps are available for pipe repairs and jointing. The clamps have been designed for use with BlackMAX® pipes and comply with Australian Standard AS 4181 'Repair and off-take clamps for water industry purposes.'


The stainless-steel clamps provide a quick and permanent solution for repairing damaged pipes. Clamps are manufactured from 316 stainless steel, with EPDM flat rubber mating (Joiner clamps) and moulded polyurethane rubber mating (Repair clamps). All welding is fully passivated to maintain the original state of the stainless steel for corrosion resistance.



## 2.4.2 BLACKMAX® FITTINGS RANGE


### *BlackMAX® Bends FF RRJ – DN225 to DN375\* (Fabricated with PVC-U DWV Pipe Sections)*

Product Code	Description	L (mm)
GWR0222515	DN225 x 15° BMAX Bend RRJ F&F	60
GWR0230015	DN300 x 15° BMAX Bend RRJ F&F	125
GWR0237515	DN375 x 15° BMAX Bend RRJ F&F	143
GWR0222530	DN225 x 30° BMAX Bend RRJ F&F	77
GWR0230030	DN300 x 30° BMAX Bend RRJ F&F	147
GWR0237530	DN375 x 30° BMAX Bend RRJ F&F	170
GWR0222545	DN225 x 45° BMAX Bend RRJ F&F	96
GWR0230045	DN300 x 45° BMAX Bend RRJ F&F	169
GWR0237545	DN375 x 45° BMAX Bend RRJ F&F	200
GWR0222590	DN225 x 90° BMAX Bend RRJ F&F	204
GWR0230090	DN300 x 90° BMAX Bend RRJ F&F	311
GWR0237590	DN375 x 90° BMAX Bend RRJ F&F	373

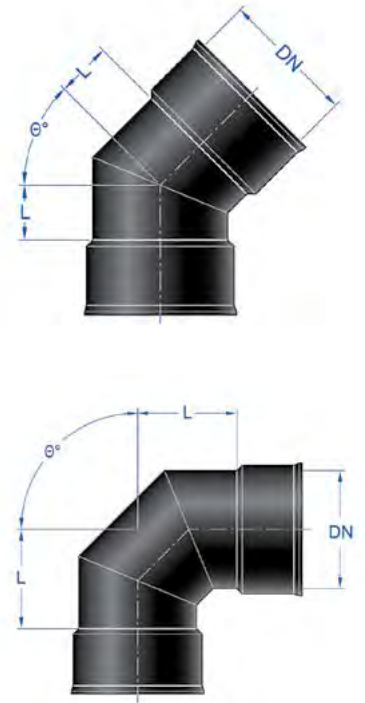

### *BlackMAX® Bends FF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)*

Product Code	Description	L (mm)
GR0245015	DN450 x 15° BMAX Bend RRJ F&F	360
GR0252515	DN525 x 15° BMAX Bend RRJ F&F	428
GR0260015	DN600 x 15° BMAX Bend RRJ F&F	473
GR0245030	DN450 x 30° BMAX Bend RRJ F&F	360
GR0252530	DN525 x 30° BMAX Bend RRJ F&F	428
GR0260030	DN600 x 30° BMAX Bend RRJ F&F	473
GR0245045	DN450 x 45° BMAX Bend RRJ F&F	360
GR0252545	DN525 x 45° BMAX Bend RRJ F&F	428
GR0260045	DN600 x 45° BMAX Bend RRJ F&F	473
GR0245090	DN450 x 90° BMAX Bend RRJ F&F	568
GR0252590	DN525 x 90° BMAX Bend RRJ F&F	607
GR0260090	DN600 x 90° BMAX Bend RRJ F&F	644

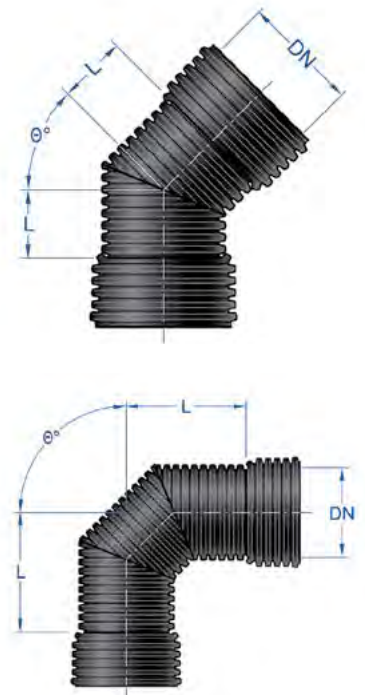

\*Larger sizes are available on request

Note:

- Other angles are available upon request.
- BlackMAX® Bends are subject to availability at time of ordering.
- Dimensions are approximate only.
- Images are not to scale.

### BlackMAX® Equal Junctions x 45° FFF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GWR2422545	DN225 x 45° BMAX Equal Junction RRJ F&F	521	386	386
GWR2430045	DN300 x 45° BMAX Equal Junction RRJ F&F	714	514	514
GWR2437545	DN375 x 45° BMAX Equal Junction RRJ F&F	816	600	600



### BlackMAX® Equal Junctions x 45° FFF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe sections)



Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GR2445045	DN450 x 45° BMAX Equal Junction RRJ F&F	1042	748	748
GR2452545	DN525 x 45° BMAX Equal Junction RRJ F&F	1158	838	838
GR2460045	DN600 x 45° BMAX Equal Junction RRJ F&F	1356	956	956



\*Larger sizes are available on request

### BlackMAX® Reducing Junctions x 45° FFF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)


Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GWR25221045	DN225 x dn100 (DWV RRJ) x 45° BMAX Reducing Junction F&F	362	306	315
GWR25221545	DN225 x dn150 (DWV RRJ) x 45° BMAX Reducing Junction F&F	393	321	324
GWR25301045	DN300 x dn100 (DWV RRJ) x 45° BMAX Reducing Junction F&F	394	354	361
GWR25301545	DN300 x dn150 (DWV RRJ) x 45° BMAX Reducing Junction F&F	365	390	378
GWR25371045	DN375 x dn100 (DWV RRJ) x 45° BMAX Reducing Junction F&F	530	468	412
GWR25371545	DN375 x dn150 (DWV RRJ) x 45° BMAX Reducing Junction F&F	530	463	451
GWR25302245	DN300 x dn225 x 45° BMAX Reducing Junction F&F	640	483	481
GWR25372245	DN375 x dn225 x 45° BMAX Reducing Junction F&F	630	527	531
GWR25373045	DN375 x dn300 x 45° BMAX Reducing Junction F&F	730	573	590

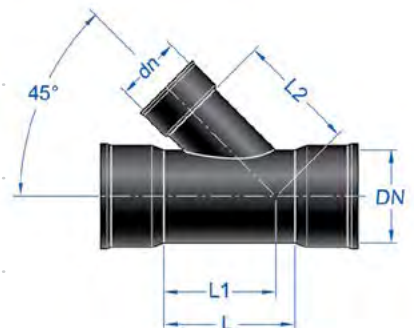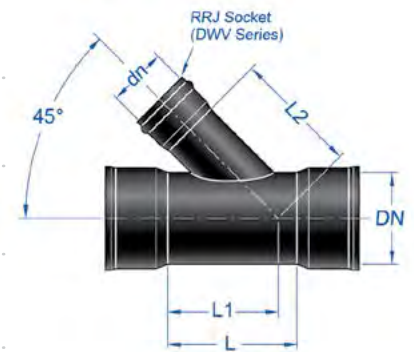

- Note:
- BlackMAX® Junctions are subject to availability at time of ordering.
  - For Junctions with a DWV SWJ Branch add 'S' at the end of the product code.
  - For Junctions with DN225 or DN300 DWV Branches add 'R' at the end of the product code.
  - Dimensions are approximate only.
  - Images are not to scale.

**BlackMAX® Reducing Junctions x 45° FFF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)**

Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GWR25452245	DN450 x dn225 x 45° BMAX Reducing Junction F&F	725	590	604
GWR25453045	DN450 x dn300 x 45° BMAX Reducing Junction F&F	831	643	678
GWR25453745	DN450 x dn375 x 45° BMAX Reducing Junction F&F	925	684	700
GWR25522245	DN525 x dn225 x 45° BMAX Reducing Junction F&F	732	635	658
GWR25523045	DN525 x dn300 x 45° BMAX Reducing Junction F&F	838	688	732
GWR25523745	DN525 x dn375 x 45° BMAX Reducing Junction F&F	941	741	753
GWR25524545	DN525 x dn450 x 45° BMAX Reducing Junction F&F	1048	793	820
GWR25602245	DN600 x dn225 x 45° BMAX Reducing Junction F&F	735	686	725
GWR25603045	DN600 x dn300 x 45° BMAX Reducing Junction F&F	841	739	800
GWR25603745	DN600 x dn375 x 45° BMAX Reducing Junction F&F	953	791	820
GWR25604545	DN600 x dn450 x 45° BMAX Reducing Junction F&F	1048	834	887
GWR25605245	DN600 x dn525 x 45° BMAX Reducing Junction F&F	1422	1090	906

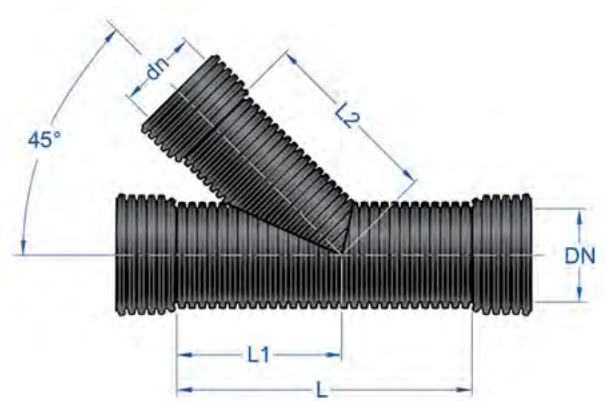

\*Larger sizes are available on request

- Note:
- BlackMAX® Junctions are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.



### BlackMAX® Reducing Junction x 45° FFF RRJ

Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GR25451045	DN450 x dn100 <sup>1</sup> (DWV RRJ) x 45° BMAX Reducing Junction F&F	555	505	525
GR25451545	DN450 x dn150 <sup>1</sup> (DWV RRJ) x 45° BMAX Reducing Junction F&F	626	540	600
GR25521045	DN525 x dn100 <sup>1</sup> (DWV RRJ) x 45° BMAX Reducing Junction F&F	555	543	630
GR25521545	DN525 x dn150 <sup>1</sup> (DWV RRJ) x 45° BMAX Reducing Junction F&F	626	580	655
GR25601045	DN600 x dn100 <sup>1</sup> (DWV RRJ) x 45° BMAX Reducing Junction F&F	615	600	700
GR25601545	DN600 x dn150 <sup>1</sup> (DWV RRJ) x 45° BMAX Reducing Junction F&F	686	636	725



Note: For reducing junctions with dn100 or dn150 DWV RRJ branches add "R" at the end of the product code.

### BlackMAX® Equal Tees FFF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)
GWR2422590	DN225 x 90° BMAX Equal Tee RRJ F&F	416	208
GWR2430090	DN300 x 90° BMAX Equal Tee RRJ F&F	564	282
GWR2437590	DN375 x 90° BMAX Equal Tee RRJ F&F	660	330



### BlackMAX® Equal Tees FFF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)

Product Code	Description	L (mm)	L1 (mm)
GR2444590	DN450 x 90° BMAX Equal Tee RRJ F&F	810	405
GR2452590	DN525 x 90° BMAX Equal Tee RRJ F&F	930	465
GR2460090	DN600 x 90° BMAX Equal Tee RRJ F&F	1008	504



\*Larger sizes are available on request

- Note:
- <sup>1</sup>dn100 (110mm OD) & dn150 (160mm OD) branches are PP spigots.
  - DWV PVC RRJ Coupling for connection with PVC DWV pipes NOT INCLUDED.
  - BlackMAX® Reducing Junctions are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.


**BlackMAX™ Reducing Tees FFF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)	L1 (mm)
GWR25221090	DN225 x dn100 x 90° BMAX Reducing Tee RRJ F&F	265	189
GWR25221590	DN225 x dn150 x 90° BMAX Reducing Tee RRJ F&F	163	193
GWR25301090	DN300 x dn100 x 90° BMAX Reducing Tee RRJ F&F	174	241
GWR25301590	DN300 x dn150 x 90° BMAX Reducing Tee RRJ F&F	199	245
GWR25371090	DN375 x dn100 x 90° BMAX Reducing Tee RRJ F&F	265	274
GWR25371590	DN375 x dn150 x 90° BMAX Reducing Tee RRJ F&F	265	288

Note: For DN100 & DN150 DWV SWJ branch add 'S' at the end of the product code.


Product Code	Description	L (mm)	L1 (mm)
GWR25302290	DN300 x dn225 x 90° BMAX Reducing Tee RRJ F&F	244	261
GWR25372290	DN375 x dn225 x 90° BMAX Reducing Tee RRJ F&F	265	323
GWR25373090	DN375 x dn300 x 90° BMAX Reducing Tee RRJ F&F	464	442

- Note:
- For DWV SWJ branch add 'S' at the end of the product code.
  - For DWV RRJ branch add 'R' at the end of the product code.
  - Dimensions are approximate only.
  - BlackMAX® Tees are subject to availability at time of ordering.
  - Images are not to scale.

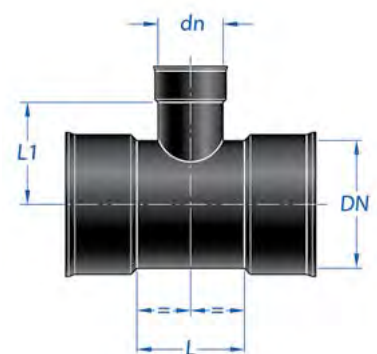

**BlackMAX® Reducing Junctions x 45° FFF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)**

Product Code	Description	L (mm)	L1 (mm)
GR25452290	DN450 x dn225 x 90° BMAX Reducing Tee RRJ F&F	630	427
GR25453090	DN450 x dn300 x 90° BMAX Reducing Tee RRJ F&F	704	427
GR25453790	DN450 x dn375 x 90° BMAX Reducing Tee RRJ F&F	778	427
GR25522290	DN525 x dn225 x 90° BMAX Reducing Tee RRJ F&F	630	465
GR25523090	DN525 x dn300 x 90° BMAX Reducing Tee RRJ F&F	650	465
GR25523790	DN525 x dn375 x 90° BMAX Reducing Tee RRJ F&F	778	465
GR25524590	DN525 x dn450 x 90° BMAX Reducing Tee RRJ F&F	854	465
GR25602290	DN600 x dn225 x 90° BMAX Reducing Tee RRJ F&F	624	514
GR25603090	DN600 x dn300 x 90° BMAX Reducing Tee RRJ F&F	720	514
GR25603790	DN600 x dn375 x 90° BMAX Reducing Tee RRJ F&F	780	514
GR25604590	DN600 x dn450 x 90° BMAX Reducing Tee RRJ F&F	856	514
GR25605290	DN600 x dn525 x 90° BMAX Reducing Tee RRJ F&F	932	514

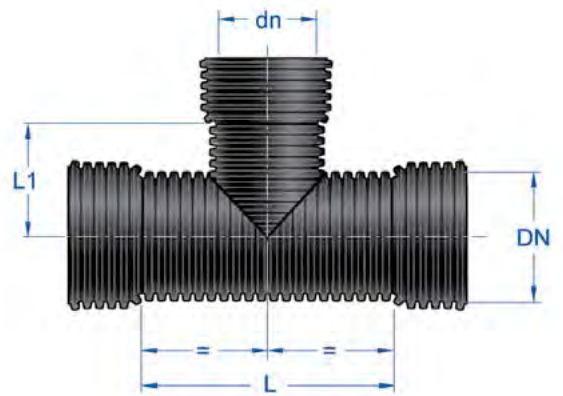


\*Larger sizes are available on request

- Note:
- BlackMAX® Reducing Tees are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.



**BlackMAX® Couplings FF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)
GWR57225	DN225 BMAX Coupling F&F	116
GWR57300	DN300 BMAX Coupling F&F	148
GWR57375	DN300 BMAX Coupling F&F	149


**BlackMAX® Couplings FF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)**


Product Code	Description	L (mm)
GR57450	DN450 BMAX Coupling F&F	400
GR57525	DN525 BMAX Coupling F&F	400
GR57600	DN600 BMAX Coupling F&F	400



\*Larger sizes are available on request

**BlackMAX® End Caps RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)
GWR105225	DN225 BMAX CAP RRJ	145
GWR105300	DN300 BMAX CAP RRJ	150
GWR105375	DN375 BMAX CAP RRJ	185

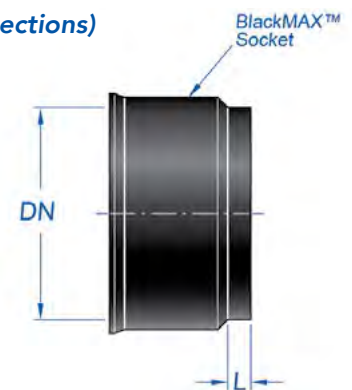
**BlackMAX® End Caps RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)**

Product Code	Description	t (mm)	L (mm)
GR105450	DN450 BMAX CAP RRJ	15	200
GR105525	DN525 BMAX CAP RRJ	20	230
GR105600	DN600 BMAX CAP RRJ	20	270




\*Larger sizes are available on request

- Note:
- BlackMAX® Couplings and Caps are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.

### BlackMAX® Plugs RRJ – DN225 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)


Product Code	Description	L (mm)
GR106225	DN225 BMAX Plug	160
GR106300	DN300 BMAX Plug	180
GR106375	DN375 BMAX Plug	215
GR106450	DN450 BMAX Plug	270
GR106525	DN525 BMAX Plug	310
GR106600	DN600 BMAX Plug	360

\*Larger sizes are available on request

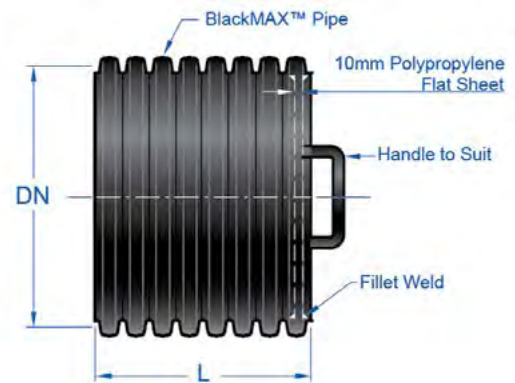

### BlackMAX® Level Invert Tapers FF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)
GWR722215	DN225 x dn150 BMAX Level Invert Taper Socket x DWV RRJ F&F	460	41
GWR723015	DN300 x dn150 BMAX Level Invert Taper Socket x DWV RRJ F&F	108	69
GWR723022	DN300 x dn225 BMAX Level Invert Taper F&F	234	33
GWR723715	DN375 x dn150 BMAX Level Invert Taper Socket x DWV RRJ F&F	168	110
GWR723722	DN375 x dn225 BMAX Level Invert Taper F&F	203	65
GWR723730	DN375 x dn300 BMAX Level Invert Taper F&F	405	43

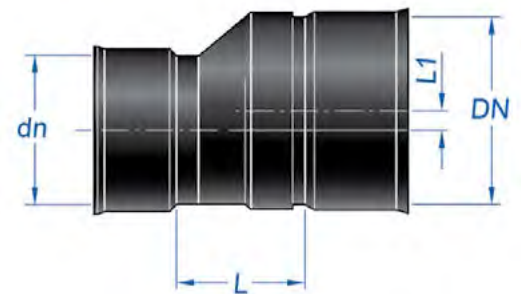


- Note:
- BlackMAX® Plugs and Reducers are subject to availability at time of ordering.
  - For Tapers with a reducing dn225 and dn300 DWV SWJ Socket add 'S' at the end of the product code.
  - For Tapers with a reducing dn225 or dn300 DWV RRJ Socket add 'R' at the end of the product code.
  - Dimensions are approximate only.
  - Images are not to scale.


**BlackMAX® Level Invert Tapers FF RRJ – DN450 to DN600\* (Fabricated with BlackMAX® PP Pipe Sections)**

Product Code	Description	L (mm)
GR724522	DN450 x dn225 BMAX Taper F&F	400
GR724530	DN450 x dn300 BMAX Taper F&F	400
GR724537	DN450 x dn375 BMAX Taper F&F	400
GR725222	DN525 x dn225 BMAX Taper F&F	400
GR725230	DN525 x dn300 BMAX Taper F&F	400
GR725237	DN525 x dn375 BMAX Taper F&F	400
GR725245	DN525 x dn450 BMAX Taper F&F	400
GR726022	DN600 x dn225 BMAX Taper F&F	400
GR726030	DN600 x dn300 BMAX Taper F&F	400
GR726037	DN600 x dn375 BMAX Taper F&F	400
GR726045	DN600 x dn450 BMAX Taper F&F	400
GR726045	DN600 x dn525 BMAX Taper F&F	400


\*Larger sizes are available on request

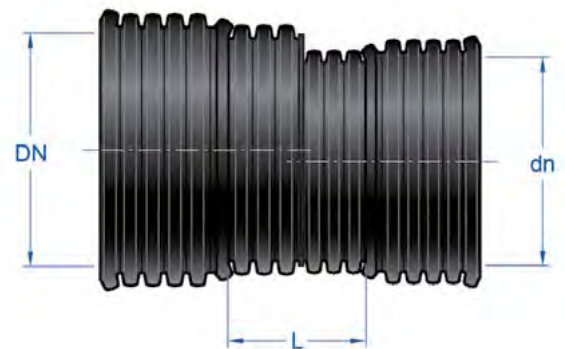
**BlackMAX® Adaptor FF BMAX x DWV RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)
GWR612222	DN225 BMAX Adaptor - BMAX x DWV RRJ F&F	77
GWR613030	DN300 BMAX Adaptor - BMAX x DWV RRJ F&F	155
GWR613737	DN375 BMAX Adaptor - BMAX x DWV RRJ F&F	107

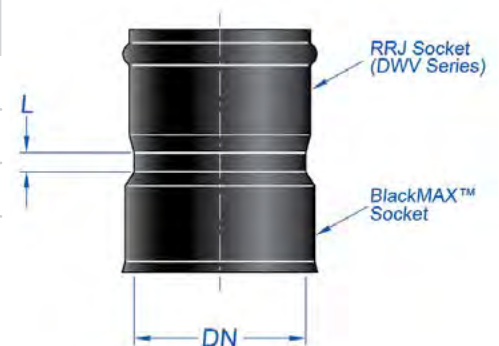
**BlackMAX® Adaptor FF BMAX RRJ x DWV SWJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)
GWR622222	DN225 BMAX Adaptor - BMAX x DWV SWJ F&F	65
GWR623030	DN300 BMAX Adaptor - BMAX x DWV SWJ F&F	140
GWR623737	DN375 BMAX Adaptor - BMAX x DWV SWJ F&F	95

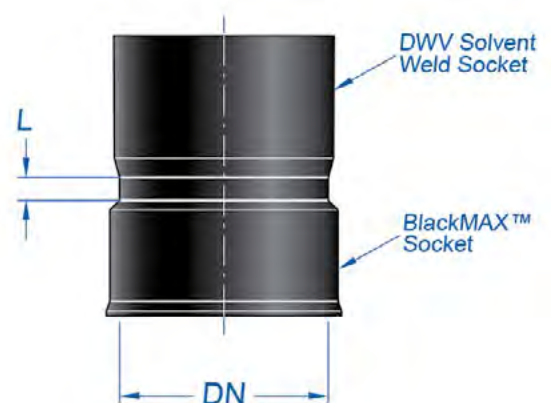

Note:

- BlackMAX® Tapers and Adaptors are subject to availability at time of ordering.
- Dimensions are approximate only.
- Images are not to scale.





**BlackMAX® Adaptor MF BMAX RRJ x DWV SP – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)	L1 (mm)
GWR602222	DN225 BMAX Adaptor - BMAX x DWV SP F&M	375	145
GWR603030	DN300 BMAX Adaptor - BMAX x DWV SP F&M	470	150
GWR603737	DN375 BMAX Adaptor - BMAX x DWV SP F&M	450	185


Note:

- BlackMAX® Adaptors are subject to availability at time of ordering.
- Dimensions are approximate only.
- Images are not to scale.

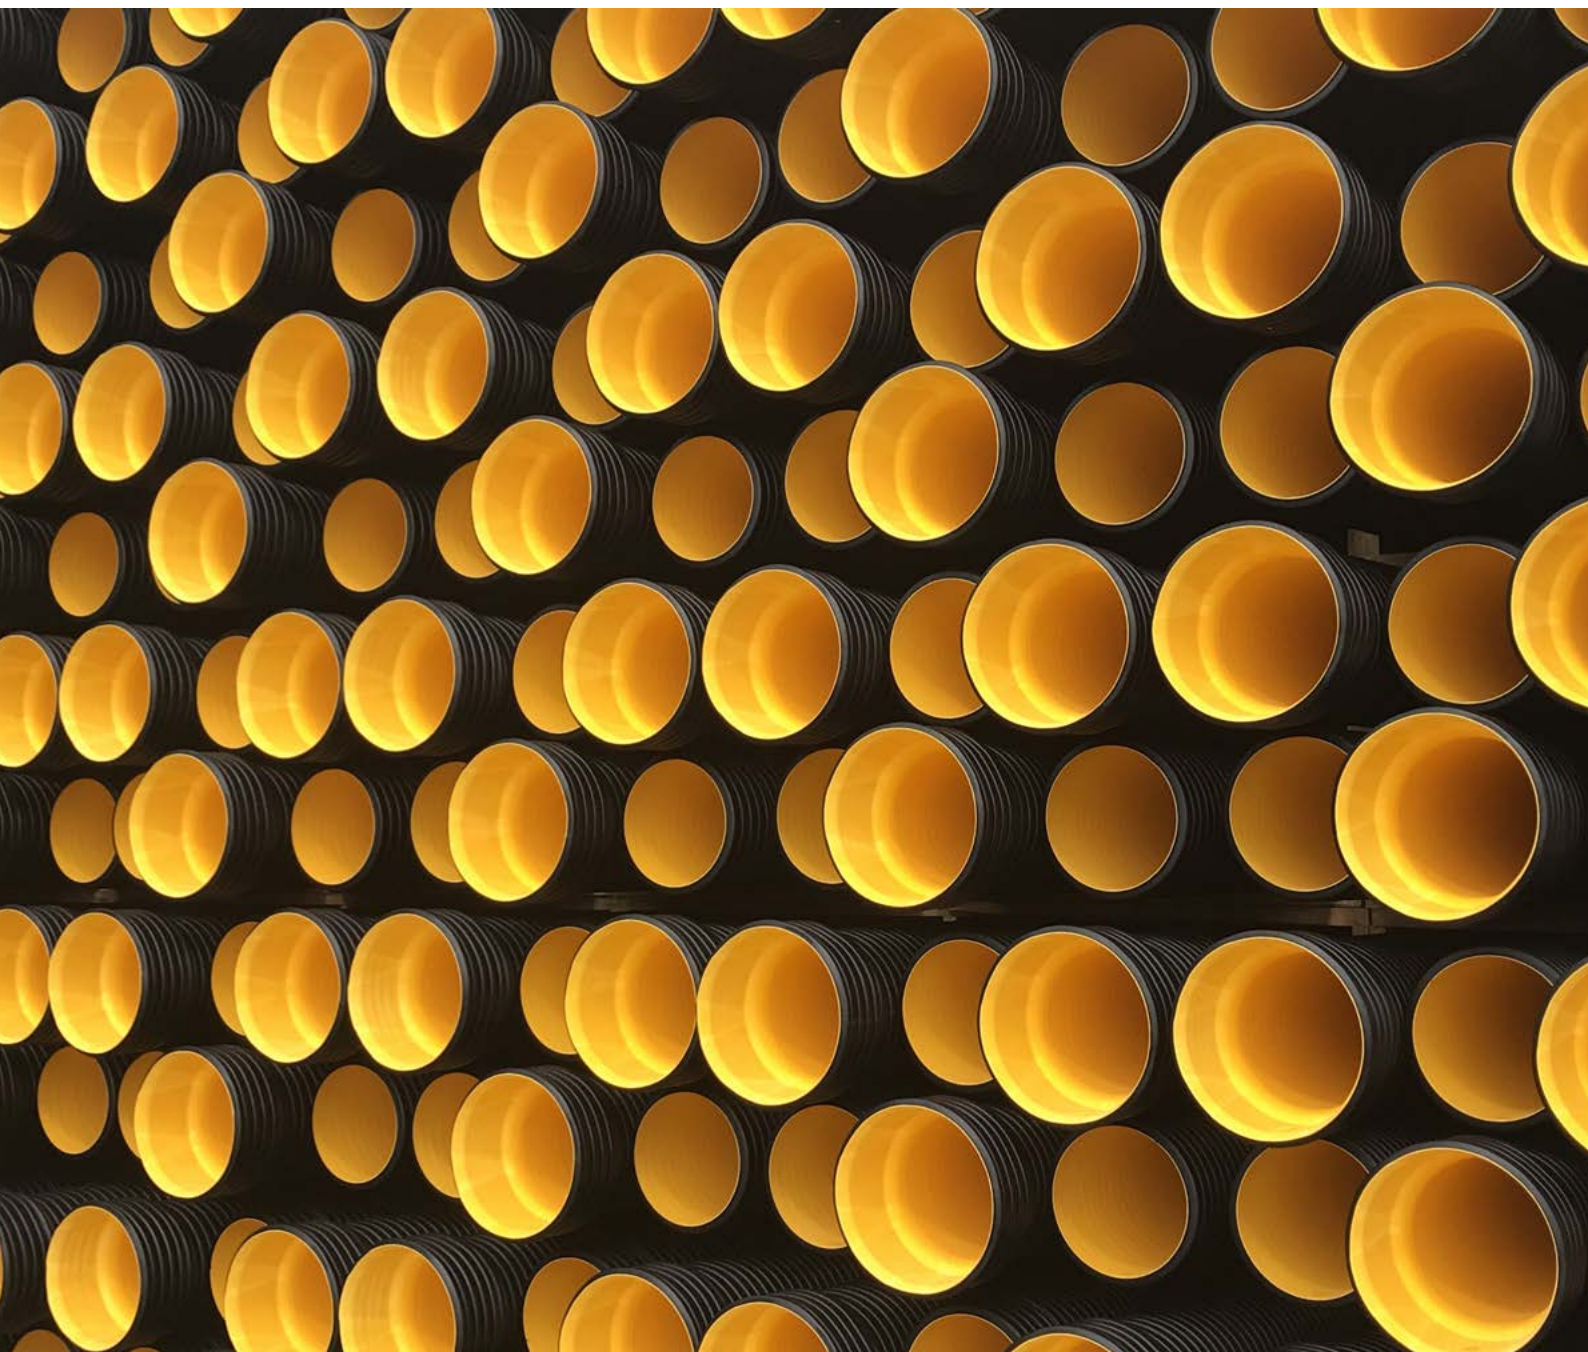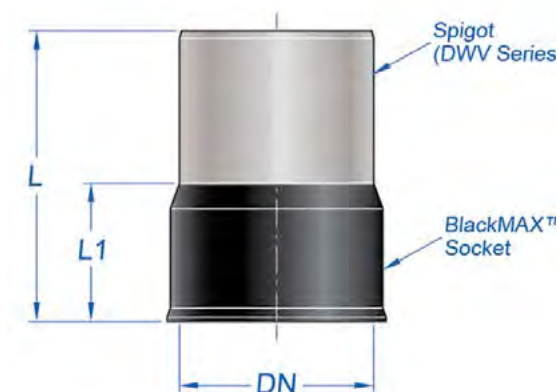


### BlackMAX® Stormwater Saddle x DWV RRJ (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)
GWR50221090	DN225 x dn100 BMAX Stormwater saddle DWV RRJ	260	80
GWR50221590	DN225 x dn150 BMAX Stormwater saddle DWV RRJ	260	120
GWR50301090	DN300 x dn100 BMAX Stormwater saddle DWV RRJ	280	80
GWR50301590	DN300 x dn150 BMAX Stormwater saddle DWV RRJ	280	120
GWR50371090	DN375 x dn100 BMAX Stormwater saddle DWV RRJ	320	80
GWR50371590	DN375 x dn150 BMAX Stormwater saddle DWV RRJ	320	120
GWR50372290	DN375 x dn225 BMAX Stormwater saddle DWV RRJ	320	160
GWR50451090	DN450 x dn100 BMAX Stormwater saddle DWV RRJ	380	80
GWR50451590	DN450 x dn150 BMAX Stormwater saddle DWV RRJ	380	120
GWR50452290	DN450 x dn225 BMAX Stormwater saddle DWV RRJ	380	160
GWR50521090	DN525 x dn100 BMAX Stormwater saddle DWV RRJ	390	80
GWR50521590	DN525 x dn150 BMAX Stormwater saddle DWV RRJ	390	120
GWR50601090	DN600 x dn100 BMAX Stormwater saddle DWV RRJ	410	80
GWR50601590	DN600 x dn150 BMAX Stormwater saddle DWV RRJ	410	120

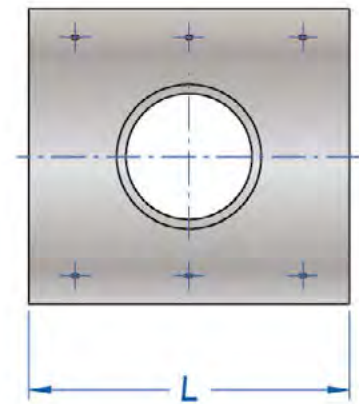


Plan View

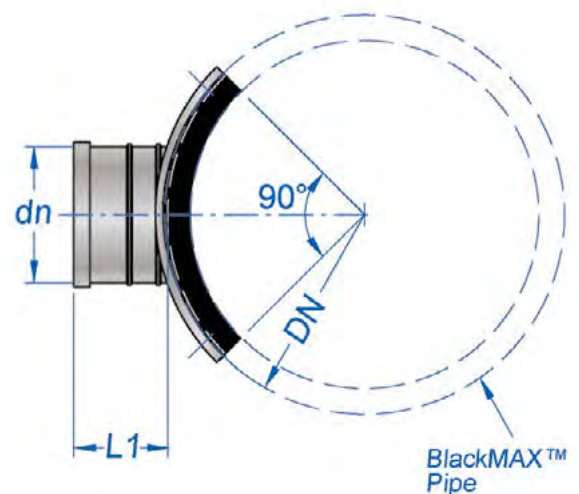

Side Elevation

- Note:
- BlackMAX® Stormwater Saddles are subject to availability at time of ordering.
  - Standard branches are supplied as DWV RRJ. SWJ joints are also available on request only. Add an 'S' at the end of the Product Code when specifying this type of joint.
  - Dimensions are approximate only.
  - Images are not to scale.


## 2.5 SEWERMAX® AND SEWERMAX+® PIPE RANGE

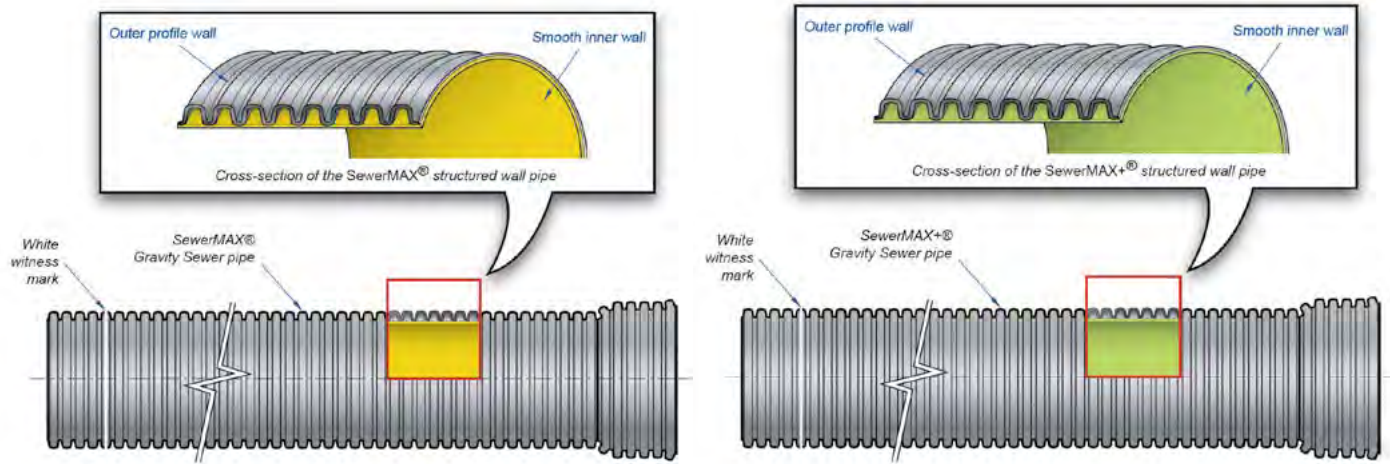

Application	Product Code	DN	SN	Nominal Length (m)	Colour Outer Wall	Colour Inner Wall
Gravity Branch and Trunk Sewers (non-pressure)	GR10225C	225	SewerMAX 10	3	Grey	SewerMAX Yellow
	GR10300C	300				
	GR10375C	375				
	GR10450C	450				
	GR10525C	525				
	GR10600C	600				
	GR10750C	750*				
	GR10900C	900*				
	GR101000C	1000*				
	GR101200C	1200*				
	GR20225C	225	SewerMAX+ 20			SewerMAX+ Light Green
	GR20300C	300				
	GR20375C	375				
	GR20450C	450				
	GR20525C	525				



### SewerMAX® and SewerMAX+® Pipe cross section longitudinal

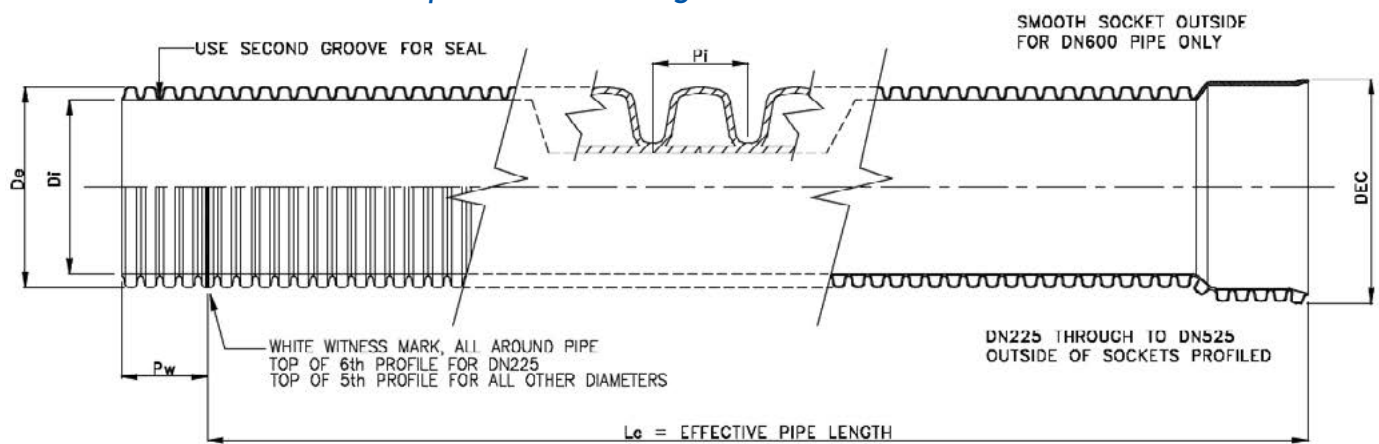

**TABLE 2.3 SewerMAX® Pipe dimensions – SN10**

DN	Mean Pipe OD D <sub>e</sub> (mm)	Min Pipe ID D <sub>i</sub> (mm)	Max Socket OD DEC (mm)	Length Witness Mark P <sub>w</sub> (mm)	Profile Pitch P <sub>i</sub> (mm)	Approx. Pipe Mass (kg/m)	Effective length Le (mm) +15 - 0
225	259	225	305	135	24.9	4	3005
300	344	300	403	147	33.2	8	3005
375	428	373	502	176	39.8	11	3030
450	514	447	603	222	49.8	14	3015
525	600	522	704	254	56.9	19	3005
600	682	596	750	296	66.4	25	2765
750	843	736	896	319	79.7	-	-
900	1010	877	1072	398	99.6	-	-
1000	-	-	-	-	-	-	-
1200	1342	1170	-	-	132.8	-	-

**TABLE 2.4 SewerMAX+® Pipe dimensions – SN20**

DN	Mean Pipe OD D <sub>e</sub> (mm)	Min Pipe ID D <sub>i</sub> (mm)	Max Socket OD DEC (mm)	Length Witness Mark P <sub>w</sub> (mm)	Profile Pitch P <sub>i</sub> (mm)	Min Waterway Thickness e <sub>4</sub> (mm)	Min Waterway Thickness e <sub>5</sub> (mm)	Approx. Pipe Mass (kg/m)	Effective length Le (mm) +15 - 0
225	259	224	305	135	24.9	2.5	2.0	6	3005
300	344	297	403	147	33.2	3.7	4.4	10	3005
375	428	370	502	176	39.8	4.5	4.7	17	3030
450	514	443	603	222	49.8	5.4	3.4	20	3015
525	600	516	704	254	56.9	6.5	4.5	27	3005

## 2.5.1 SEWERMAX® FITTINGS

A standard range of fittings for use with SewerMAX® pipes is available for a complete pipe system. Bends, Junctions, Couplings, Plugs, Reducers and Adaptors are fabricated from polypropylene SewerMAX® and PVC pipe sections.

SewerMAX® fittings comply with Australian Standard, AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'.

### FITTINGS RANGE DN225 UP TO DN375 (SECTION 2.5.2)

SewerMAX® fittings in sizes DN225, DN300 and DN375 are fabricated with PVC pipe sections with moulded socket ends for rubber ring joint connection with SewerMAX® pipe spigots. Bends are fabricated as segmented bends with a radius of  $2.5 \times \text{DN}$ .

All fittings are fibreglass reinforced and coloured light grey for identification.

### FITTINGS RANGE DN450 UP TO DN1200 (SECTION 2.5.2)

SewerMAX® fittings in sizes DN450 to DN1200 are fabricated with SewerMAX® (PP) pipe sections. Bends are fabricated as segmented bends with a radius of  $2.5 \times \text{DN}$ .

Fittings are generally supplied with socketed ends suitable for rubber ring connection with SewerMAX® pipe spigots. Other end configurations are also available, such as spigot ends with separate pipe couplings for jointing.

SewerMAX® fittings fabricated with DN100, DN150 or DN225 components are supplied with either PVC RRJ or SWJ socket ends or standard solid wall polypropylene plain-ended pipe spigots (110mm OD) and (160mm OD). These components allow connections with PVC DWV gravity sewer property connections.



*Prefabricated DN450 SewerMAX® Bend ready for despatch*

### FITTINGS FOR REPAIRS (SECTION 2.5.2)

A range of stainless-steel clamps is available for pipe repairs and jointing. The clamps have been designed for use with SewerMAX® pipes and comply with the requirements of Australian Standard AS 4181 'Repair and off-take clamps for water industry purposes'.

The Stainless-steel clamps provide a quick and permanent solution for repairing damaged pipes. Clamps are manufactured from 316 stainless steel, with EPDM flat rubber mating (Joiner clamps) and moulded polyurethane rubber matting (Repair clamps). All welding is fully passivated to maintain the original state of the stainless steel for corrosion resistance.




## 2.5.2 SEWERMAX® FITTINGS RANGE

### SewerMAX® Bends FF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)
GSR0222515	DN225 x 15° SMAX Bend RRJ F&F	111
GSR0230015	DN300 x 15° SMAX Bend RRJ F&F	153
GSR0237515	DN375 x 15° SMAX Bend RRJ F&F	161
GSR0222530	DN225 x 30° SMAX Bend RRJ F&F	192
GSR0230030	DN300 x 30° SMAX Bend RRJ F&F	254
GSR0237530	DN375 x 30° SMAX Bend RRJ F&F	290
GSR0222545	DN225 x 45° SMAX Bend RRJ F&F	280
GSR0230045	DN300 x 45° SMAX Bend RRJ F&F	363
GSR0237545	DN375 x 45° SMAX Bend RRJ F&F	428
GSR0222590	DN225 x 90° SMAX Bend RRJ F&F	549
GSR0230090	DN300 x 90° SMAX Bend RRJ F&F	645
GSR0237590	DN375 x 90° SMAX Bend RRJ F&F	TBC

Note:

- Standard DN225 to DN375 SewerMAX® bends are fabricated with a minimum pipe radius of 2.5 x DN.
- DN375 x 90° SMAX Bend in development.

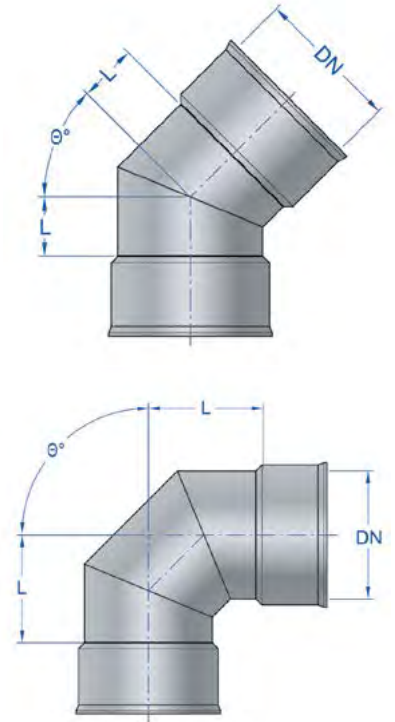


### SewerMAX® Bends FF RRJ – DN450 to DN600\* (Fabricated with SewerMAX® PP Pipe Sections)

Product Code	Description	L (mm)
GSR0245015	DN450 x 15° SMAX Bend RRJ F&F	148
GSR0252515	DN525 x 15° SMAX Bend RRJ F&F	173
GSR0260015	DN600 x 15° SMAX Bend RRJ F&F	197
GSR0245030	DN450 x 30° SMAX Bend RRJ F&F	299
GSR0252530	DN525 x 30° SMAX Bend RRJ F&F	349
GSR0260030	DN600 x 30° SMAX Bend RRJ F&F	414
GSR0245045	DN450 x 45° SMAX Bend RRJ F&F	457
GSR0252545	DN525 x 45° SMAX Bend RRJ F&F	533
GSR0260045	DN600 x 45° SMAX Bend RRJ F&F	609
GSR0245090	DN450 x 90° SMAX Bend RRJ F&F	1039
GSR0252590	DN525 x 90° SMAX Bend RRJ F&F	1213
GSR0260090	DN600 x 90° SMAX Bend RRJ F&F	1386

\*Larger sizes are available on request

Note:


- Standard DN450 TO DN600 SewerMAX® bends are fabricated with a minimum pipe radius of 2.5 x DN.
- SewerMAX® Bends are subject to availability at time of ordering.
- Other angles are available upon request.
- Dimensions are approximate only.
- Images are not to scale.

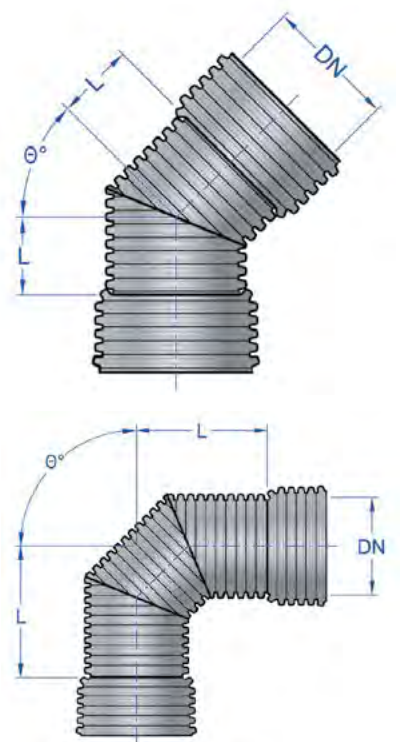




### SewerMAX® Equal Junctions x 45° FFF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GSR2422545	DN225 x 45° SMAX Equal Junction RRJ F&F	521	386	386
GSR2430045	DN300 x 45° SMAX Equal Junction RRJ F&F	714	514	514
GSR2437545	DN375 x 45° SMAX Equal Junction RRJ F&F	816	600	600



### SewerMAX® Equal Junctions x 45° FFF RRJ – DN450 to DN600\* (Fabricated with SewerMAX® PP Pipe Sections)



Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GSR2445045	DN450 x 45° SMAX Equal Junction RRJ F&F	1042	748	748
GSR2452545	DN525 x 45° SMAX Equal Junction RRJ F&F	1158	838	838
GSR2460045	DN600 x 45° SMAX Equal Junction RRJ F&F	1356	956	956



\*Larger sizes are available on request

### SewerMAX® Reducing Junctions x 45° FFF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)


Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GSR25221045	DN225 x dn100 (DWV RRJ) x 45° SMAX Reducing Junction F&F	349	279	303
GSR25221545	DN225 x dn150 (DWV RRJ) x 45° SMAX Reducing Junction F&F	380	330	332
GSR25301045	DN300 x dn100 (DWV RRJ) x 45° SMAX Reducing Junction F&F	456	346	373
GSR25301545	DN300 x dn150 (DWV RRJ) x 45° SMAX Reducing Junction F&F	459	389	398
GSR25371045	DN375 x dn100 (DWV RRJ) x 45° SMAX Reducing Junction F&F	486	351	399
GSR25371545	DN375 x dn150 (DWV RRJ) x 45° SMAX Reducing Junction F&F	TBC	TBC	TBC
GSR25302245	DN300 x dn225 x 45° SMAX Reducing Junction F&F	634	546	440
GSR25372245	DN375 x dn225 x 45° SMAX Reducing Junction F&F	TBC	TBC	TBC
GSR25373045	DN375 x dn300 x 45° SMAX Reducing Junction F&F	TBC	TBC	TBC

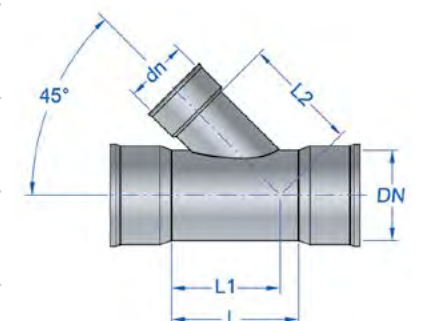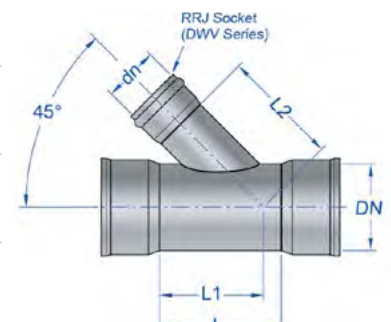


- Note:
- For junctions with dn225 and dn300 SWJ Branches add 'S' at the end of the product code.
  - For Junctions with dn225 and dn300 DWV RRJ branches add 'R' at the end of the product code.
  - SewerMAX® Junctions are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.

**SewerMAX® Reducing Junctions x 45° FFF RRJ – DN450 to DN600° (Fabricated with SewerMAX® PP Pipe Sections)**

Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GSR25452245	DN450 x dn225 x 45° SMAX Reducing Junction F&F	725	590	604
GSR25453045	DN450 x dn300 x 45° SMAX Reducing Junction F&F	831	643	678
GSR25453745	DN450 x dn375 x 45° SMAX Reducing Junction F&F	925	684	700
GSR25522245	DN525 x dn225 x 45° SMAX Reducing Junction F&F	732	635	658
GSR25523045	DN525 x dn300 x 45° SMAX Reducing Junction F&F	838	688	732
GSR25523745	DN525 x dn375 x 45° SMAX Reducing Junction F&F	941	741	753
GSR25524545	DN525 x dn450 x 45° SMAX Reducing Junction F&F	1048	793	820
GSR25602245	DN600 x dn225 x 45° SMAX Reducing Junction F&F	735	686	725
GSR25603045	DN600 x dn300 x 45° SMAX Reducing Junction F&F	841	739	800
GSR25603745	DN600 x dn375 x 45° SMAX Reducing Junction F&F	953	791	820
GSR25604545	DN600 x dn450 x 45° SMAX Reducing Junction F&F	1048	834	887
GSR25605245	DN600 x dn525 x 45° SMAX Reducing Junction F&F	1422	1090	906

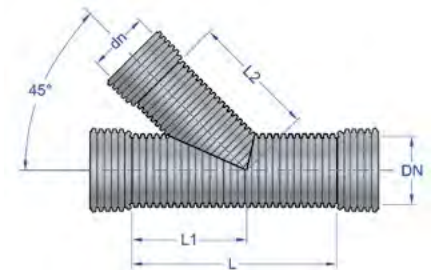

Product Code	Description	L (mm)	L1 (mm)	L2 (mm)
GSR25451045	DN450 x dn100 <sup>1</sup> (DWV RRJ) x 45° SMAX Reducing Junction F&F	555	505	575
GSR25451545	DN450 x dn150 <sup>1</sup> (DWV RRJ) x 45° SMAX Reducing Junction F&F	626	540	600
GSR25521045	DN525 x dn100 <sup>1</sup> (DWV RRJ) x 45° SMAX Reducing Junction F&F	555	543	630
GSR25521545	DN525 x dn150 <sup>1</sup> (DWV RRJ) x 45° SMAX Reducing Junction F&F	626	580	655
GSR25601045	DN600 x dn100 <sup>1</sup> (DWV RRJ) x 45° SMAX Reducing Junction F&F	615	600	700
GSR25601545	DN600 x dn150 <sup>1</sup> (DWV RRJ) x 45° SMAX Reducing Junction F&F	686	636	725

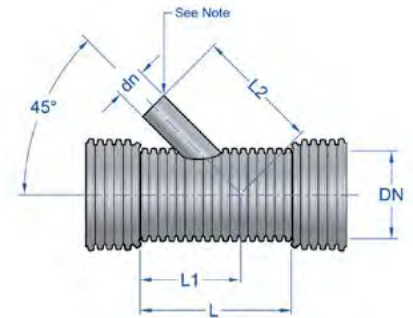

\*Larger sizes are available on request


- Note:
- <sup>1</sup>dn100 (110mm OD) & dn150 (160mm OD) branches are PP spigots.
  - DWV PVC RRJ Coupling for connection with PVC DWV pipes NOT INCLUDED.
  - SewerMAX® Reducing Junctions are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.






**SewerMAX® Couplings FF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)
GSR57225	DN225 SMAX Coupling F&F	116
GSR57300	DN300 SMAX Coupling F&F	158
GSR57375	DN300 SMAX Coupling F&F	149


**SewerMAX® Couplings FF RRJ – DN450 to DN600\* (Fabricated with SewerMAX® PP Pipe Sections)**

Product Code	Description	L (mm)
GSR57450	DN450 BMAX Coupling F&F	300
GSR57525	DN525 BMAX Coupling F&F	360
GSR57600	DN600 BMAX Coupling F&F	400


\*Larger sizes are available on request


**SewerMAX® End Caps RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)**

Product Code	Description	L (mm)
GSR105225	DN225 SMAX CAP RRJ	105
GSR105300	DN300 SMAX CAP RRJ	100
GSR105375	DN375 SMAX CAP RRJ	135

Note:


- SewerMAX® Couplings and Caps are subject to availability at time of ordering.
- Dimensions are approximate only.
- Images are not to scale.

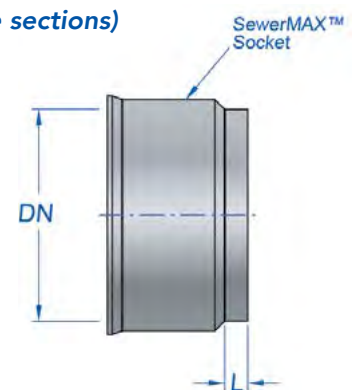

### SewerMAX® End Caps RRJ – DN450 to DN600\* (Fabricated with SewerMAX® PP Pipe Sections)

Product Code	Description	t (mm)	L (mm)
GSR105450	DN450 SMAX CAP RRJ	15	200
GSR105525	DN525 SMAX CAP RRJ	20	230
GSR105600	DN600 SMAX CAP RRJ	20	270


\*Larger sizes are available on request



### SewerMAX® Plugs RRJ – DN225 to DN600\* (Fabricated with SewerMAX® PP Pipe Sections)


Product Code	Description	L (mm)
GSR106225	DN225 SMAX Plug	160
GSR106300	DN300 SMAX Plug	180
GSR106375	DN375 SMAX Plug	215
GSR106450	DN450 SMAX Plug	270
GSR106525	DN525 SMAX Plug	310
GSR106600	DN600 SMAX Plug	360

\*Larger sizes are available on request

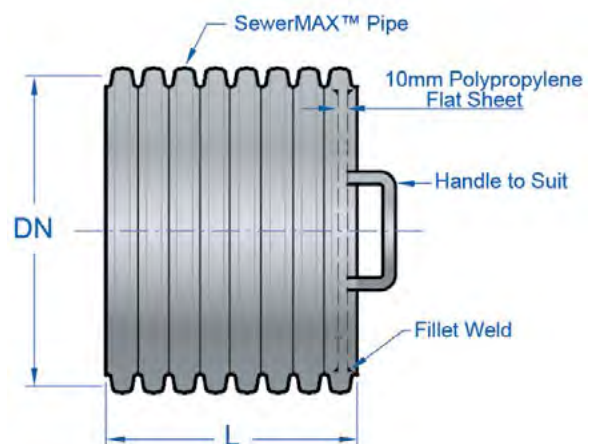


### SewerMAX® Level Invert Tapers FF RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)
GSR722215	DN225 x dn150 SMAX Level Invert Taper Socket x DWV RRJ F&F	460	41
GSR723015	DN300 x dn150 SMAX Level Invert Taper Socket x DWV RRJ F&F	108	69
GSR723022	DN300 x dn225 SMAX Level Invert Taper F&F	234	33
GSR723715	DN375 x dn150 SMAX Level Invert Taper Socket x DWV RRJ F&F	168	110
GSR723722	DN375 x dn225 SMAX Level Invert Taper F&F	203	65
GSR723730	DN375 x dn300 SMAX Level Invert Taper F&F	405	43

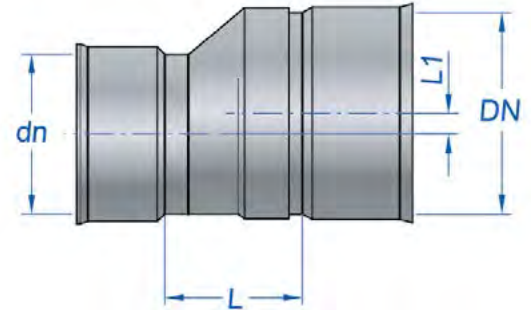

### SewerMAX® Level Invert Tapers FF RRJ – DN450 to DN600\* (Fabricated with SewerMAX® PP Pipe Sections)

Product Code	Description	L (mm)
GSR724522	DN450 x dn225 SMAX Taper F&F	400
GSR724530	DN450 x dn300 SMAX Taper F&F	400
GSR724537	DN450 x dn375 SMAX Taper F&F	400
GSR725222	DN525 x dn225 SMAX Taper F&F	400
GSR725230	DN525 x dn300 SMAX Taper F&F	400
GSR725237	DN525 x dn375 SMAX Taper F&F	400
GSR725245	DN525 x dn450 SMAX Taper F&F	400
GSR726022	DN600 x dn225 SMAX Taper F&F	400
GSR726030	DN600 x dn300 SMAX Taper F&F	400
GSR726037	DN600 x dn375 SMAX Taper F&F	400
GSR726045	DN600 x dn450 SMAX Taper F&F	400
GSR726052	DN600 x dn525 SMAX Taper F&F	400

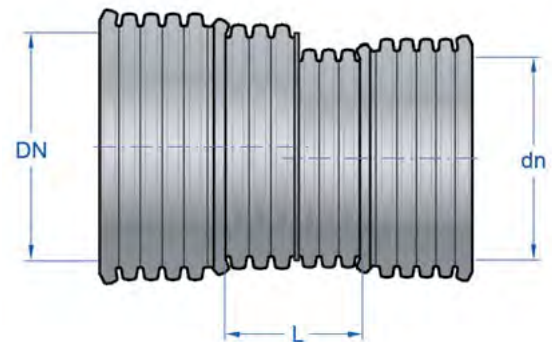


\*Larger sizes are available on request

- Note:
- For Tapers with dn150 DWV SWJ Socket add 'S' at the end of the product code.
  - For Tapers with dn150 DWV RRJ Socket add 'R' at the end of the product code.
  - For Tapers with dn225 or DN300 DWV SWJ Socket add 'S' at the end of the product code.
  - For Tapers with dn225 or DN300 DWV RRJ Socket add 'R' at the end of the product code.
  - SewerMAX® Reducers are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.




### SewerMAX® Adaptor FF SMAX x DWV RRJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)
GSR612222	DN225 SMAX Adaptor - SMAX x DWV RRJ F&F	77
GSR613030	DN300 SMAX Adaptor - SMAX x DWV RRJ F&F	155
GSR613737	DN375 SMAX Adaptor - SMAX x DWV RRJ F&F	107

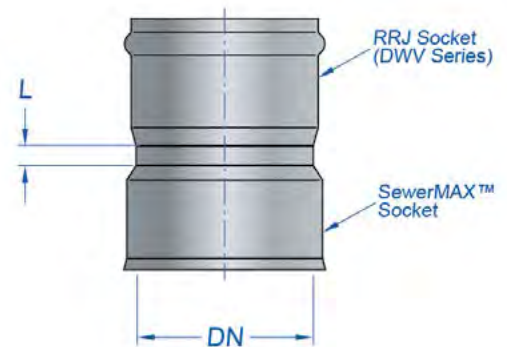


### SewerMAX® Adaptor FF SMAX RRJ x DWV SWJ – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)
GSR622222	DN225 SMAX Adaptor - SMAX x DWV SWJ F&F	75
GSR623030	DN300 SMAX Adaptor - SMAX x DWV SWJ F&F	145
GSR623737	DN375 SMAX Adaptor - SMAX x DWV SWJ F&F	125

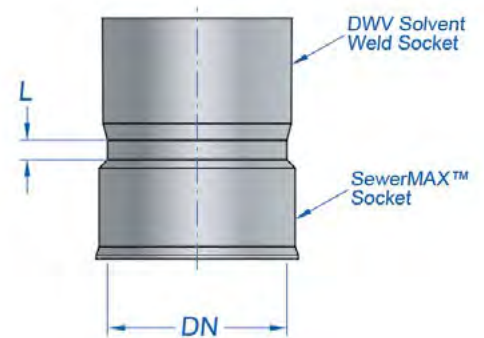

### SewerMAX® Adaptor MF SMAX RRJ x DWV SP – DN225 to DN375 (Fabricated with PVC-U DWV Pipe sections)

Product Code	Description	L (mm)	L1 (mm)
GSR602222	DN225 SMAX Adaptor - SMAX x DWV SP F&M	375	145
GSR603030	DN300 SMAX Adaptor - SMAX x DWV SP F&M	470	150
GSR603737	DN375 SMAX Adaptor - SMAX x DWV SP F&M	450	185

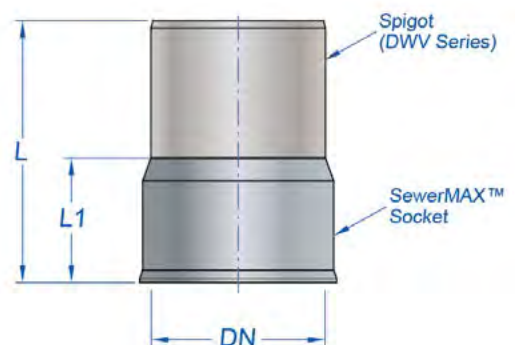


- Note:
- SewerMAX® Adaptors are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.

### 25.3 SEWERMAX® STAINLESS STEEL CLAMPS

#### SewerMAX® Stainless Steel Repair Clamp – DN225 to DN600 (For minor repairs)

Product Code	Description	L (mm)
C37018.22530	DN225 SMAX Repair Clamp (4 bolts)	300
C37018.30030	DN300 SMAX Repair Clamp (4 bolts)	300
C37018.37530	DN375 SMAX Repair Clamp (4 Bolts)	300
C37018.45040	DN450 SMAX Repair Clamp (4 bolts)	400
C37018.52540	DN525 SMAX Repair Clamp (4 bolts)	400
C37018.60040	DN600 SMAX Repair Clamp (4 Bolts)	400

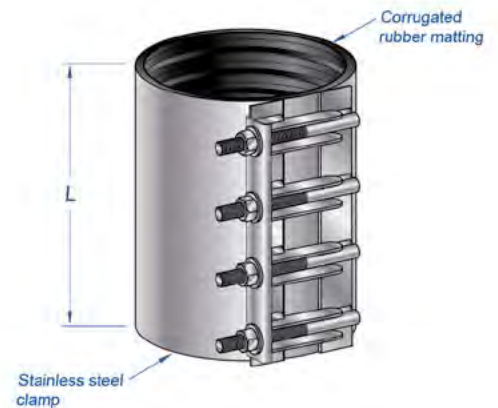

#### SewerMAX® Stainless Steel Joiner Clamp – DN225 to DN600 (For major repairs)

Product Code	Description	L (mm)
C37019.22520	DN225 SMAX Joiner Clamp (2 bolts)	200
C37019.30020	DN300 SMAX Joiner Clamp (2 bolts)	200
C37019.37520	DN375 SMAX Joiner Clamp (2 Bolts)	200
C37019.45030	DN450 SMAX Joiner Clamp (4 bolts)	300
C37019.52530	DN525 SMAX Joiner Clamp (4 bolts)	300
C37019.60030	DN600 SMAX Joiner Clamp (4 Bolts)	300




- Note:
- SewerMAX® SS Clamps are subject to availability at time of ordering.
  - SewerMAX® Adaptors are subject to availability at time of ordering.
  - Dimensions are approximate only.
  - Images are not to scale.


## 2.6 PIPE JOINTING

BlackMAX® and SewerMAX® pipes and fittings are manufactured with a spigot and socket rubber ring jointing system. A profiled rubber ring is assembled in the second trough from the spigot end and is compressed as the spigot enters the socket. This jointing system can be used after cutting the pipe in the field for short length adjustments. Joined pipes may be deflected by up to 2° from the socket off-line after assembly. See Section 4.4.2 for details of the jointing procedure.

### 2.6.1 JOINT CROSS SECTION DETAILS

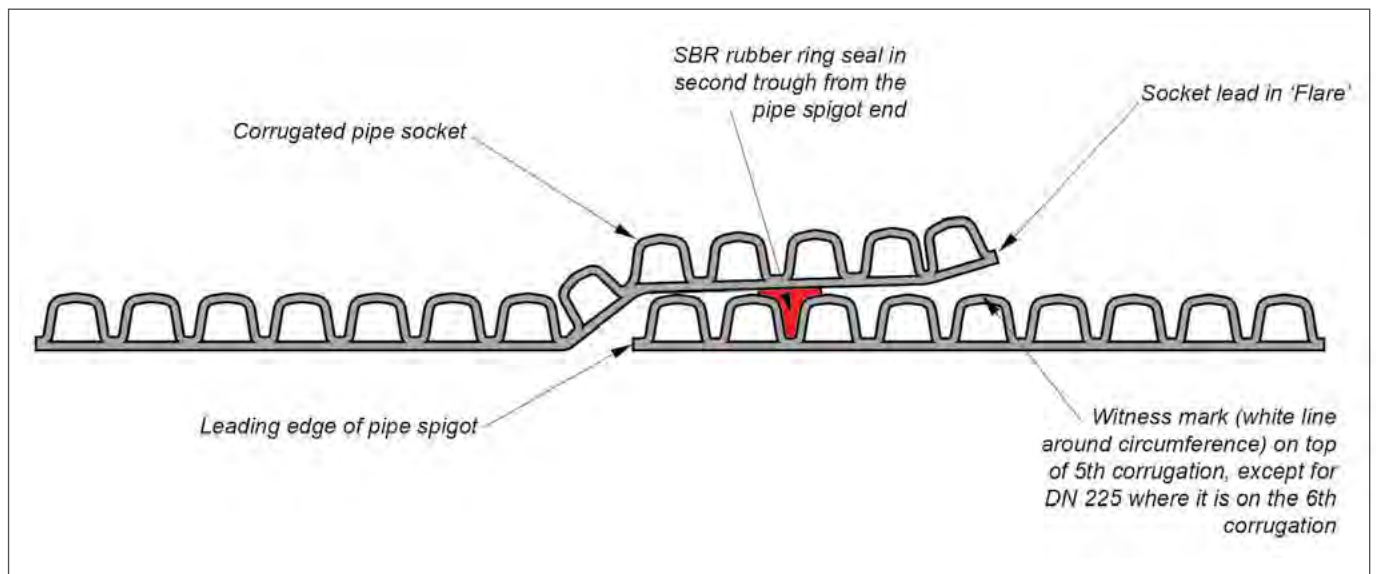

DN225 to DN525 spigot and socket rubber ring cross section assembly

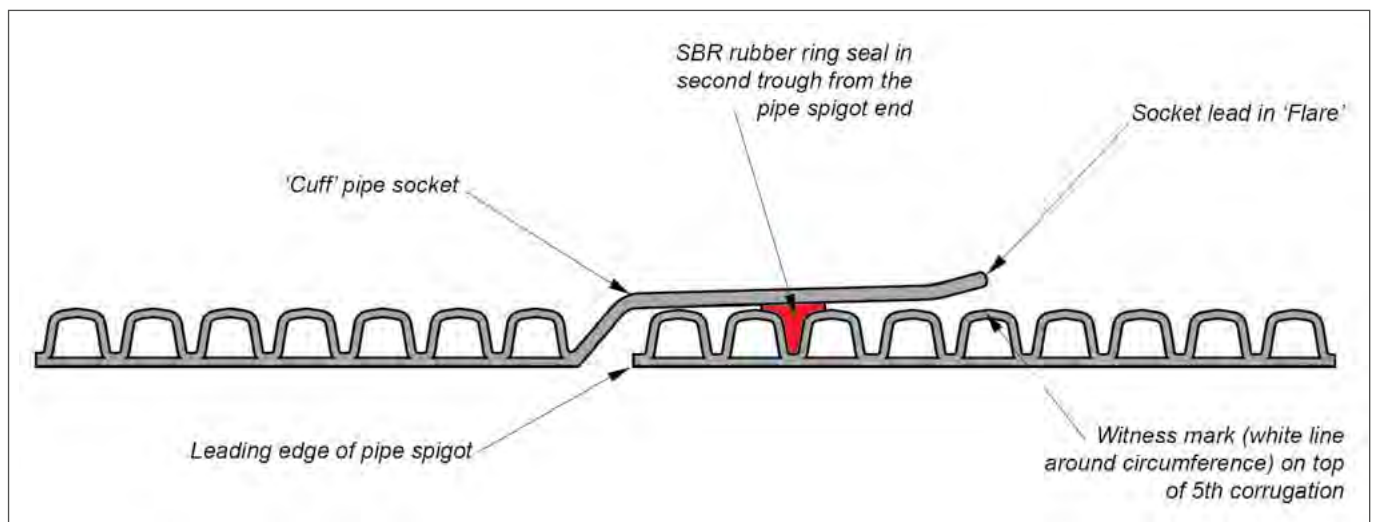

DN600 to DN1200 spigot and socket rubber ring cross section assembly




## 2.6.2 RUBBER RING JOINT DESIGN AND PERFORMANCE


Poor joint performance can lead to leakage and tree root intrusion causing pipe blockages and ground water infiltration. Infiltration through the pipe joint can also cause silting of the pipeline and long-term maintenance issues. For this reason, the quality of the joint is critical to the performance of any pipe system.

The BlackMAX® and SewerMAX® elastomeric seal provides a high degree of resistance to infiltration, exfiltration, and root ingress. The SBR rubber ring seal is compliant to 'AS1646 Elastomeric seals for water works purposes' and is resistant to chemical and microbiological attack.


### BlackMAX® RRJ Pipe Joint (DN225 to DN525)

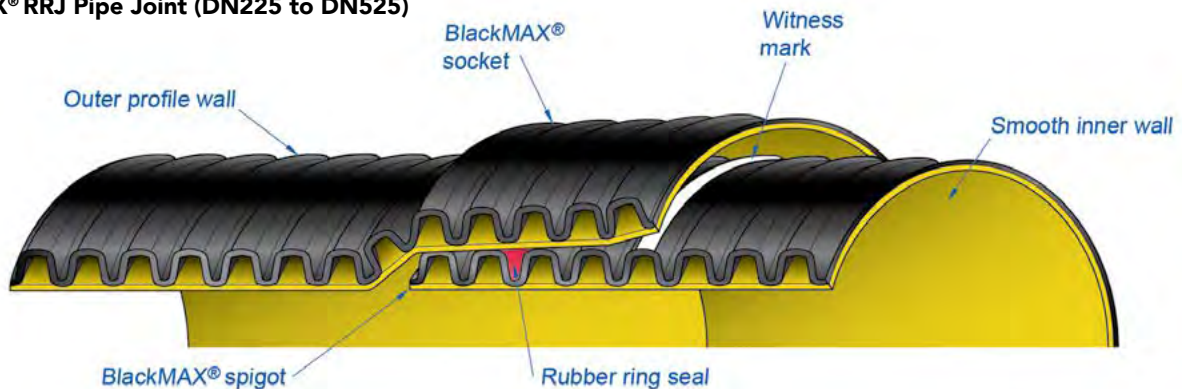

### SewerMAX® RRJ Pipe Joint (DN225 to DN525)

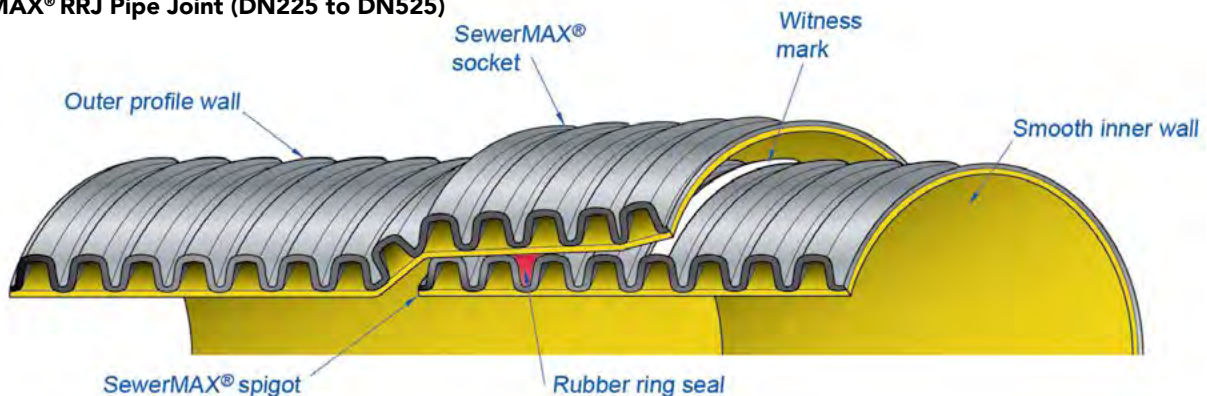

### SewerMAX+® RRJ Pipe Joint (DN225 to DN525)

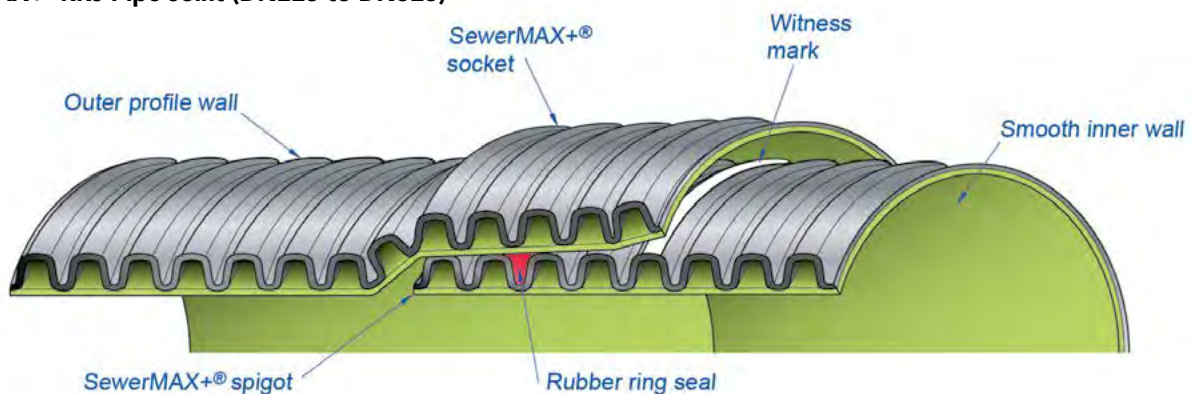

## 2.6.3 JOINT TIGHTNESS TESTS

The BlackMAX® and SewerMAX® pipe joint has been tested in accordance with the performance requirements in 'AS/NZS 5065 Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications. Section 3.4.3 (AS/NZS 5065) 'Contact width and pressure' specifies a minimum contact pressure of 0.4MPa between the rubber ring seal and the pipe socket wall over a distance of at least 4mm. These conditions have been shown to provide high resistance to tree root intrusion for plastic pipes.

## 2.6.4 PRESSURE AND VACUUM

The BlackMAX® and SewerMAX® pipe joint has been tested in accordance with the performance requirements in 'AS/NZS 5065 Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'. Sections 3.4.1 (AS/NZS 5065) 'Hydrostatic pressure test' and 3.4.2 'Liquid infiltration test' specifies a pressure test of 80 +5, -0 kPa for 60 +5, -0 min and a vacuum test of -80 +5, -0 kPa for 60 +5, -0 min with a diametral distortion of 7.5%.

## 2.7 PIPE STIFFNESS

The ring stiffness of a flexible pipe indicates its ability to resist soil loads, external hydrostatic pressure, negative internal pressures, traffic, and construction loads. The nominal ring stiffness can be determined by laboratory testing and is expressed in N/m/m - Reference AS/NZS 2566.1 and AS/NZS 1462.22.

Pipe Description	Pipe Stiffness	Classification (AS/NZS 5065)
BlackMAX®	>8000 N/m/m	SN8
SewerMAX®	>10000 N/m/m	SN10
SewerMAX+®	>20000 N/m/m	SN20

The high ring stiffness of SewerMAX® and SewerMAX+® provides a higher factor of safety for deep buried applications normally associated with gravity sewer mains.

The stiffness criterion has been adopted by Australian Standard AS/NZS 2566.1 'Buried flexible pipelines - Part 1 Structural design' as being the most appropriate means of classifying flexible pipes manufactured from all types of plastics and metallic materials. It is defined as the force required to achieve the nominated deflection (typically 3% to 5%) on a specific length of pipe and is expressed mathematically as follows:

**Equation 2.1**

$$SN = \frac{Ff}{L.dv} \quad \text{N/m/m}$$

**Equation 2.2**

$$SN = \frac{El}{Dm^3.10^6} \quad \text{N/m/m}$$

SN = nominal stiffness (N/m/m)

E = apparent pipe material modulus (MPa)

F = force (N)


I = second moment of area (m<sup>4</sup>/m)

L = Length of test specimen (m)

dv = deflection (Diametral deformation) (m)

D<sub>m</sub> = pipe diameter at neutral axis of the pipe wall (m)

f = the ovality correction factor, that is f = 10<sup>-5</sup> (1860 + 2500 dv/D)

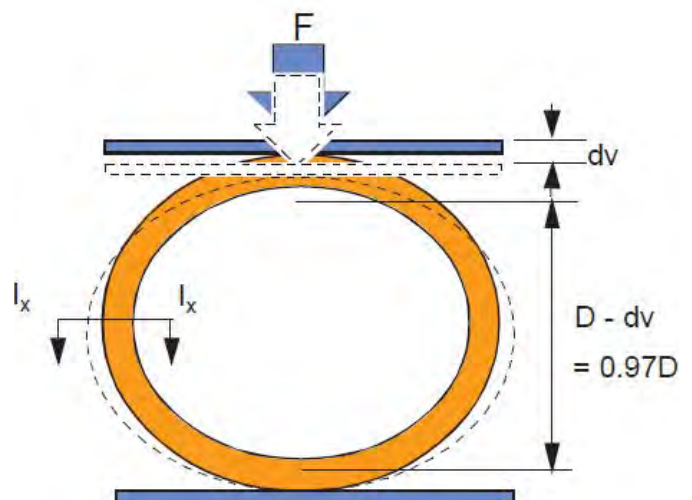

## 3.0 DESIGN

### 3.1 HYDRAULIC PERFORMANCE

New BlackMAX® and SewerMAX® pipelines fall into the smooth polymer pipe category of AS2200 'Design charts for water supply and sewerage' and provide exceptionally good hydraulic performance. In some instances, hydraulic performance may be affected by various adverse service factors including:

- Growth of slime (varies with the age of the pipeline and available nutrient in the water)
- Siltation or settlement of suspended particulate matter
- Solids deposition
- Roughening due to carrying of abrasive solids
- Joint imperfections or gaps
- Fitting types and configurations
- Pits and maintenance holes
- Gross pollutant traps

The notations used for equations in this section are as follows:

Notation	Description	SI unit
$d$	Internal diameter	m
$f$	Darcy friction coefficient	
$g$	Acceleration due to gravity	m/s <sup>2</sup>
$k$	Equivalent hydraulic roughness	m
$L$	Length of pipeline	m
$n$	Manning n	
$Q$	Flow or Discharge	L/s
$Q_p$	Most probable peak dry weather flow	L/s
$Q_f$	Flow or Discharge – pipe flowing full	L/s
$R$	Hydraulic mean radius. i.e. flow area perimeter	m
$R_e$	Reynolds number	
$R_p$	Hydraulic mean radius for part full pipe	m
$R_f$	Hydraulic mean radius for full pipe i.e. D/4	m
$S$	Hydraulic gradient or slope of gravity flow sewer	m/m
$V$	Mean velocity	m/s
$V_p$	Mean velocity in part full pipe	m/s
$V_f$	Mean velocity in pipe flowing full	m/s
$H_L$	Friction head loss	m
$y$	Depth of flow above pipe invert	m
$\rho$	Fluid density	kg/m <sup>3</sup>
$\nu$	Kinematic viscosity	m <sup>2</sup> /s
$2\theta$	Angle (radians) subtended at pipe centre by water surface in invert – (Figure 3.6)	
$T$	Average boundary shear stress	Pa



To assist the designer in selecting the appropriate pipe diameter, flow resistance charts for BlackMAX® and SewerMAX® pipes have been provided. Figures 3.1, 3.2, 3.3 and 3.4.

These charts relate friction loss to discharge and velocity with pipes running full and have been calculated using the Colebrook-White transition equation (Equation 3.1). The two values of roughness are generally accepted for the given applications.

**Equation 3.1**

$$v = -2(2gdS)^{0.5} \log \left( \frac{k}{3.7d} + \frac{2.51v}{D(2gdS)^{0.5}} \right) \quad \frac{m}{s}$$

The Colebrook White equation considers the variation of viscosity with temperature and pipe roughness and is recognised as being one of the most accurate in general use. It requires iterative solutions and it is sometimes more convenient to use the Darcy head loss expression, with the Darcy friction co-efficient 'f' developed by P. Swamee and A. Jain based on the Colebrook-White approach. The Swamee-Jain equation approximates the Colebrook equation used to solve for the Darcy friction factor.

**Equation 3.2**

$$H_L = f \cdot \frac{L}{d} \cdot \frac{V^2}{2g} \quad m$$

**Equation 3.3**

$$f = \frac{0.25}{\left[ \log \left( \frac{k}{3.7d} + \frac{5.74}{Re^{0.9}} \right) \right]^2}$$

The following flow resistance charts have been prepared based on the following assumptions:

- Temperature = 20°C
- Kinematic viscosity of water  $\nu = 1.01 \times 10^{-6} \text{ m}^2/\text{s}$
- Equivalent hydraulic roughness  $k = 0.01\text{mm}$  and  $0.06\text{mm}$


When comparing BlackMAX® and SewerMAX® with other pipe systems, designers should consider both the smooth surface characteristics of polypropylene and the anticipated pipeline service. Different applications may require a variation of the values of roughness coefficients chosen to conform to accepted practice. For example, much higher values are commonly specified for stormwater systems to consider anticipated debris loading. In the case of sewers, it may be necessary to consider possible slime development. Generally, smooth pipe materials have a Colebrook White 'k' value equal to less than one fifth of the value used for rougher materials such as cement lined pipes, concrete and vitrified clay pipes used for the same purpose. Typical comparative values are given in the following table.

**TABLE 3.1 Typical Colebrook White roughness coefficients k for different materials**

Application	Typical polymer pipe roughness k (mm)	Typical non polymer pipe roughness k (mm)
Water	0.006	0.03
Sewerage and drainage	0.06	0.6


Note: These values are for clean water and assume the pipeline is straight, clean, and concentrically jointed. Australian Standard AS 2200 'Design charts for water supply and sewerage' gives a range of values for polymers of 0.003mm to 0.015mm under these conditions and 0.03mm to 0.6mm for non-polymer pipes.

FIGURE 3.1 Colebrook White Flow chart used typically for Stormwater drainage applications  $k=0.01\text{mm}$

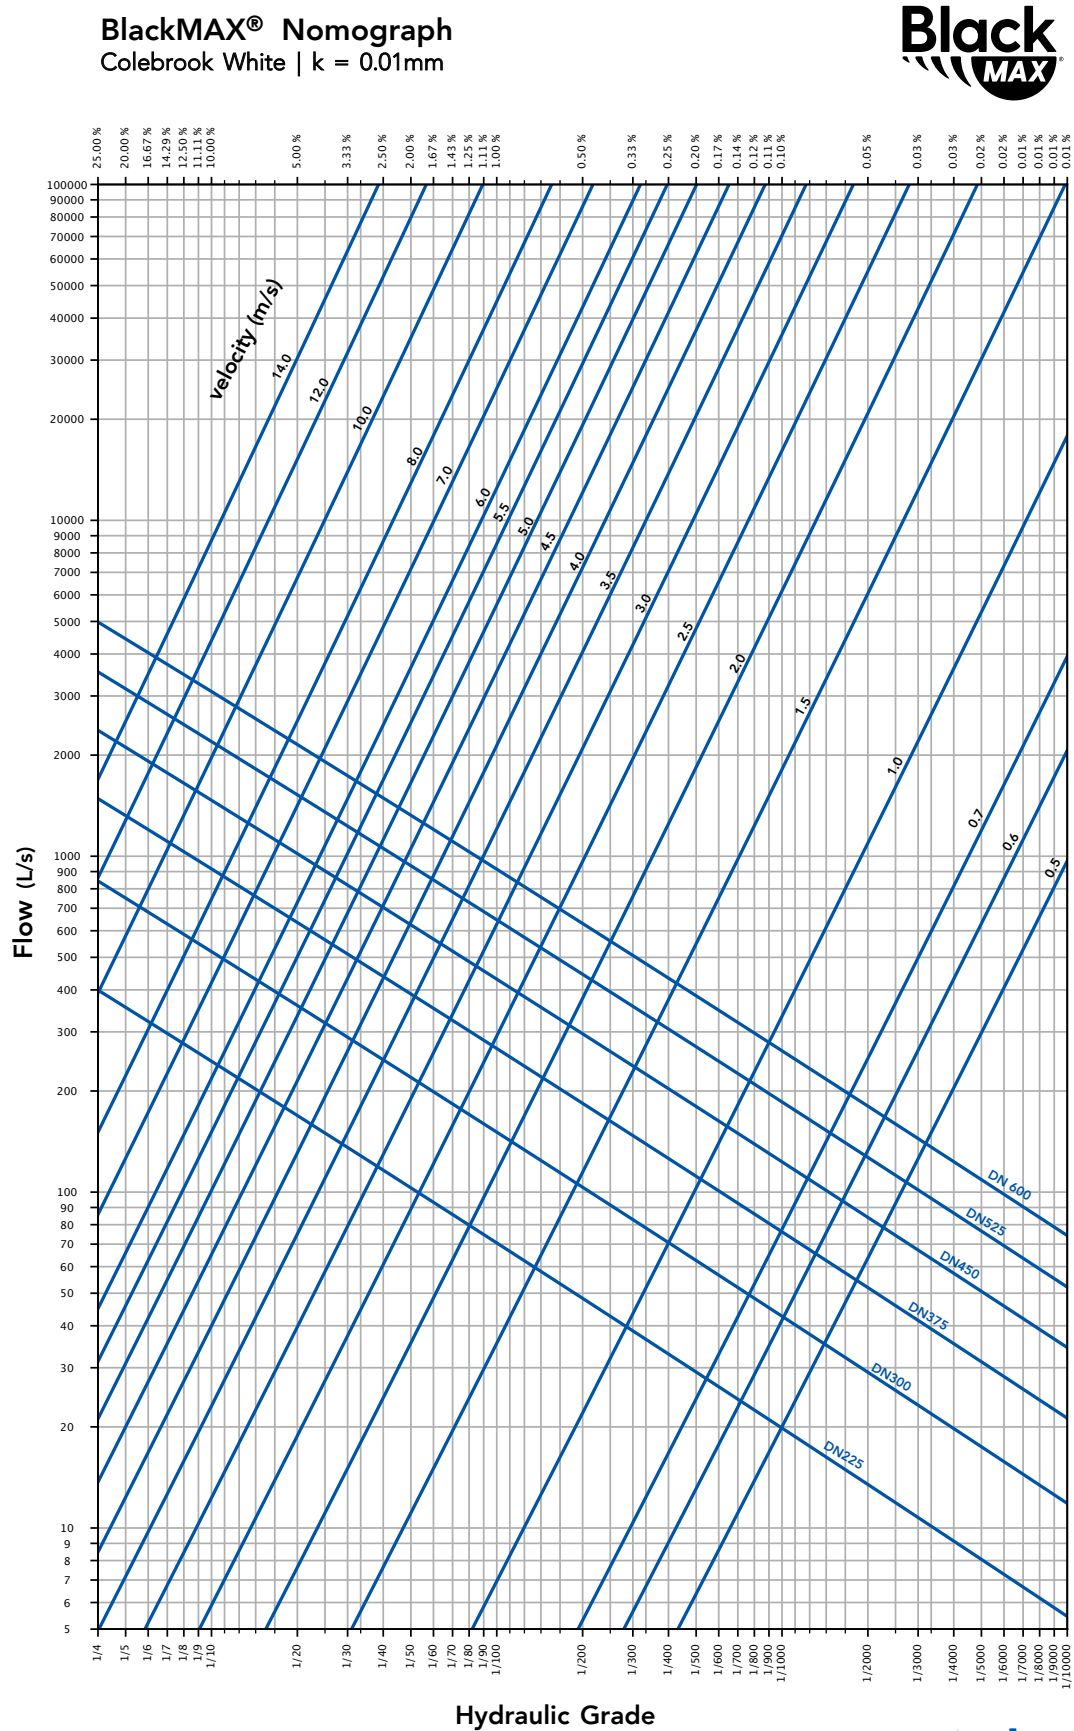

The graph shown is for guidance only.


FIGURE 3.2 Colebrook White Flow chart used typically for Stormwater drainage and Sewer applications  $k=0.06\text{mm}$

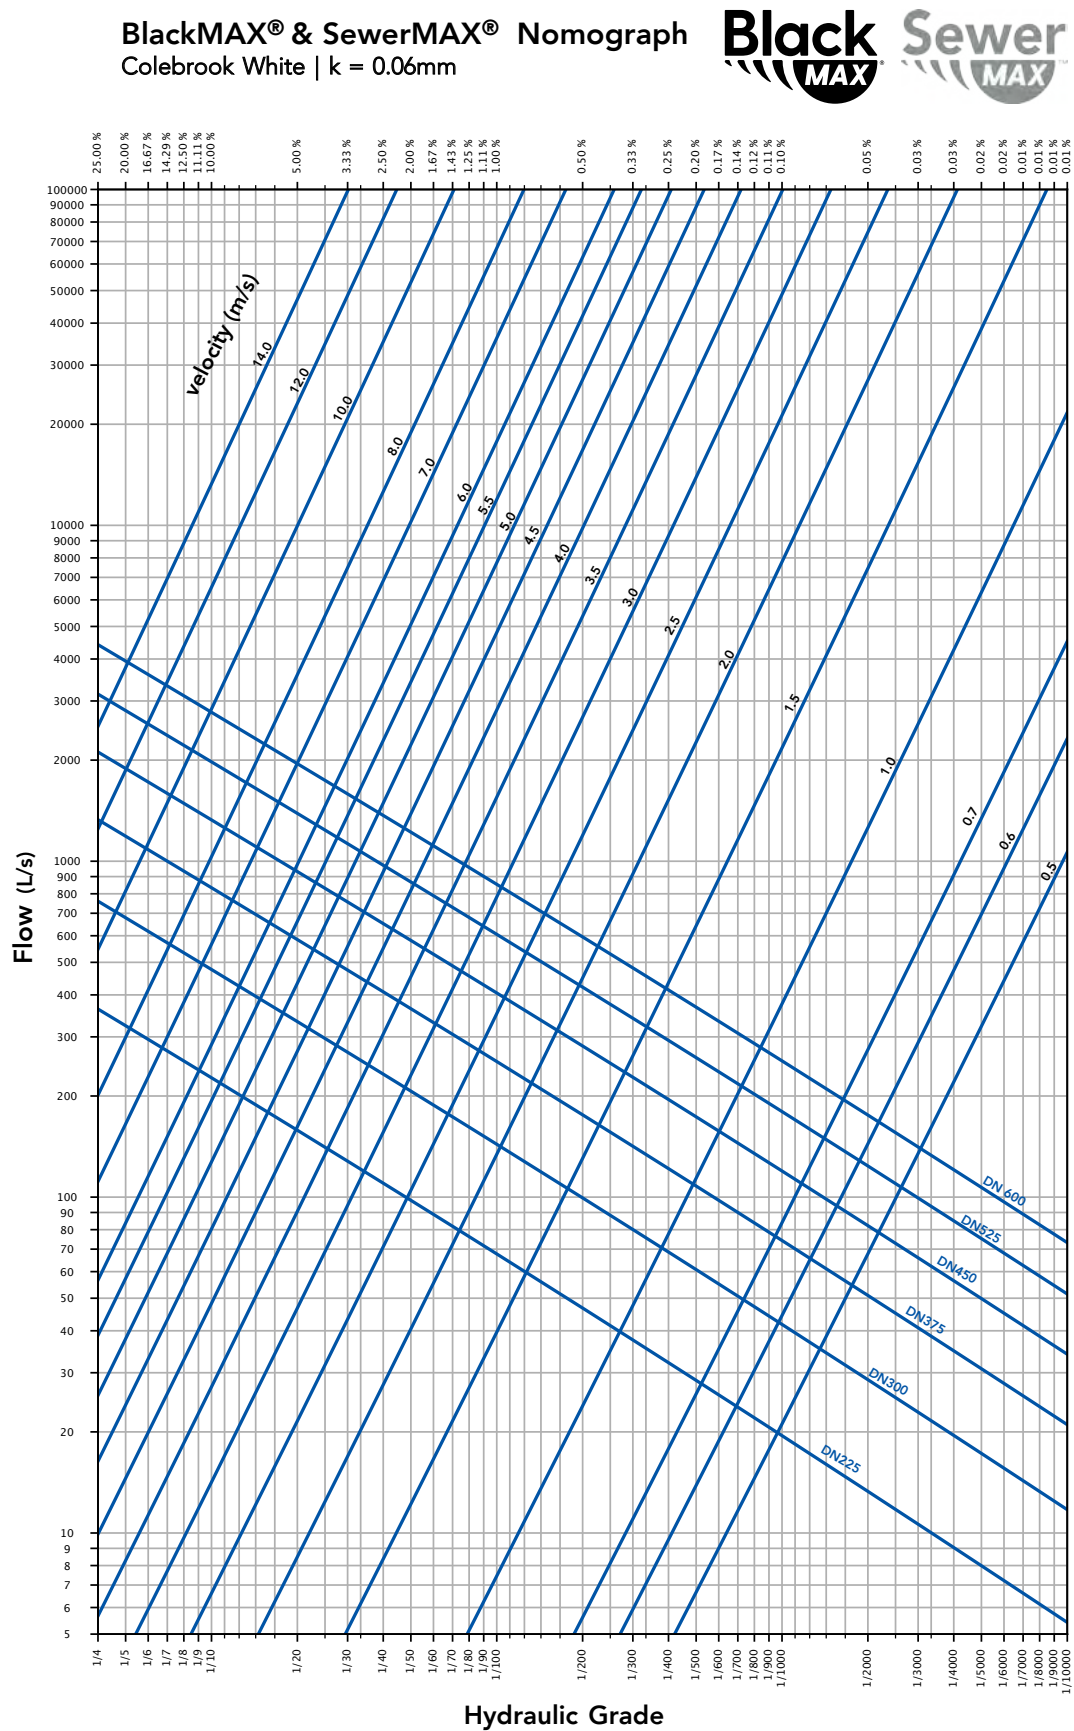

The graph shown is for guidance only.



FIGURE 3.3 Colebrook White Flow chart used typically for Stormwater drainage and Sewer applications  $k=0.06\text{mm}$

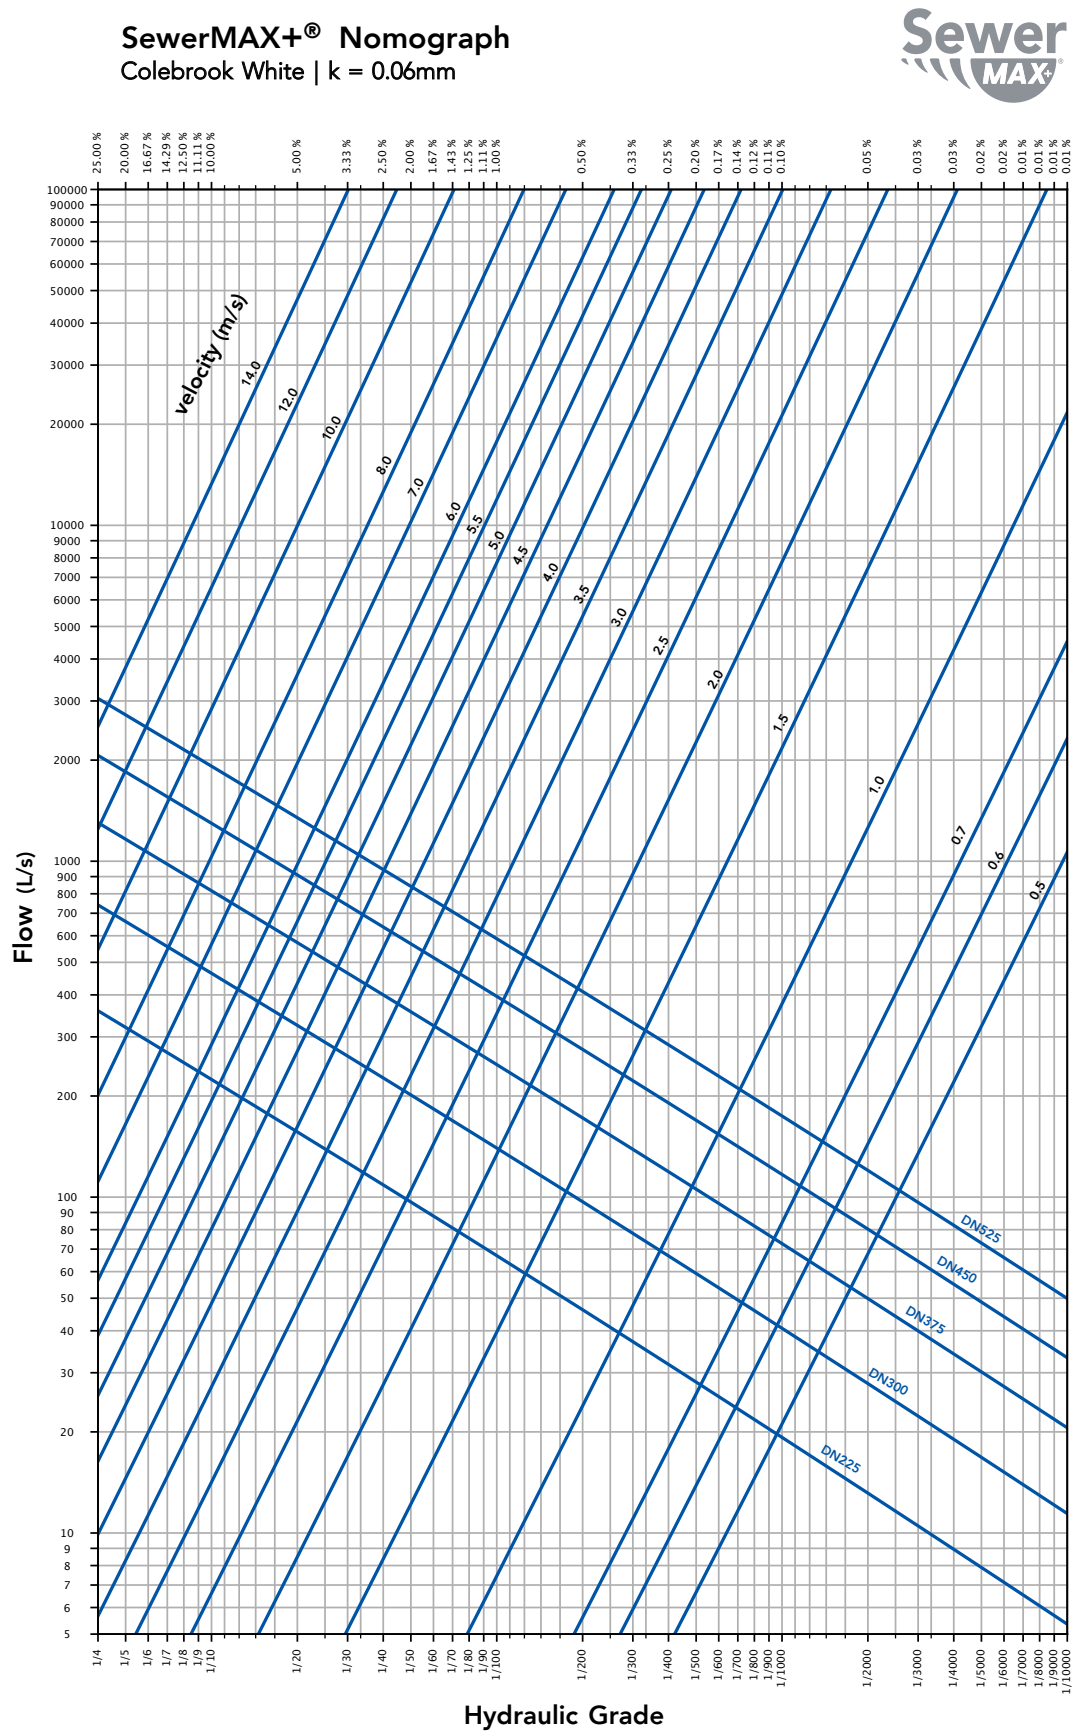

The graph shown is for guidance only.

Alternative empirical formulae, exponential in form, have been used over many years for flow calculations. Being relatively easy to use, they are still favoured by hydraulic engineers. The Manning Equations are the most common for non-pressure gravity flow. They can be written as:

**Equation 3.4**

$$Q = \frac{4000}{n} \pi \left( \frac{d}{4} \right)^{8/3} S^{1/2} \frac{L}{s}$$

and

**Equation 3.5**


$$V = \frac{0.3950}{n} d^{0.67} S^{0.5} \frac{m}{s}$$

For clean polypropylene pipes such as BlackMAX® and SewerMAX®, 'n' is usually taken as being equal to 0.009. In the Australian Standard AS 2200, 'n' for polymeric materials is in the range of 0.008 to 0.009 whereas for vitrified clay 'n' is in the range of 0.009 to 0.013.





**FIGURE 3.4 Manning's Flow chart used typically for Stormwater drainage and Sewer applications  $n=0.009$**

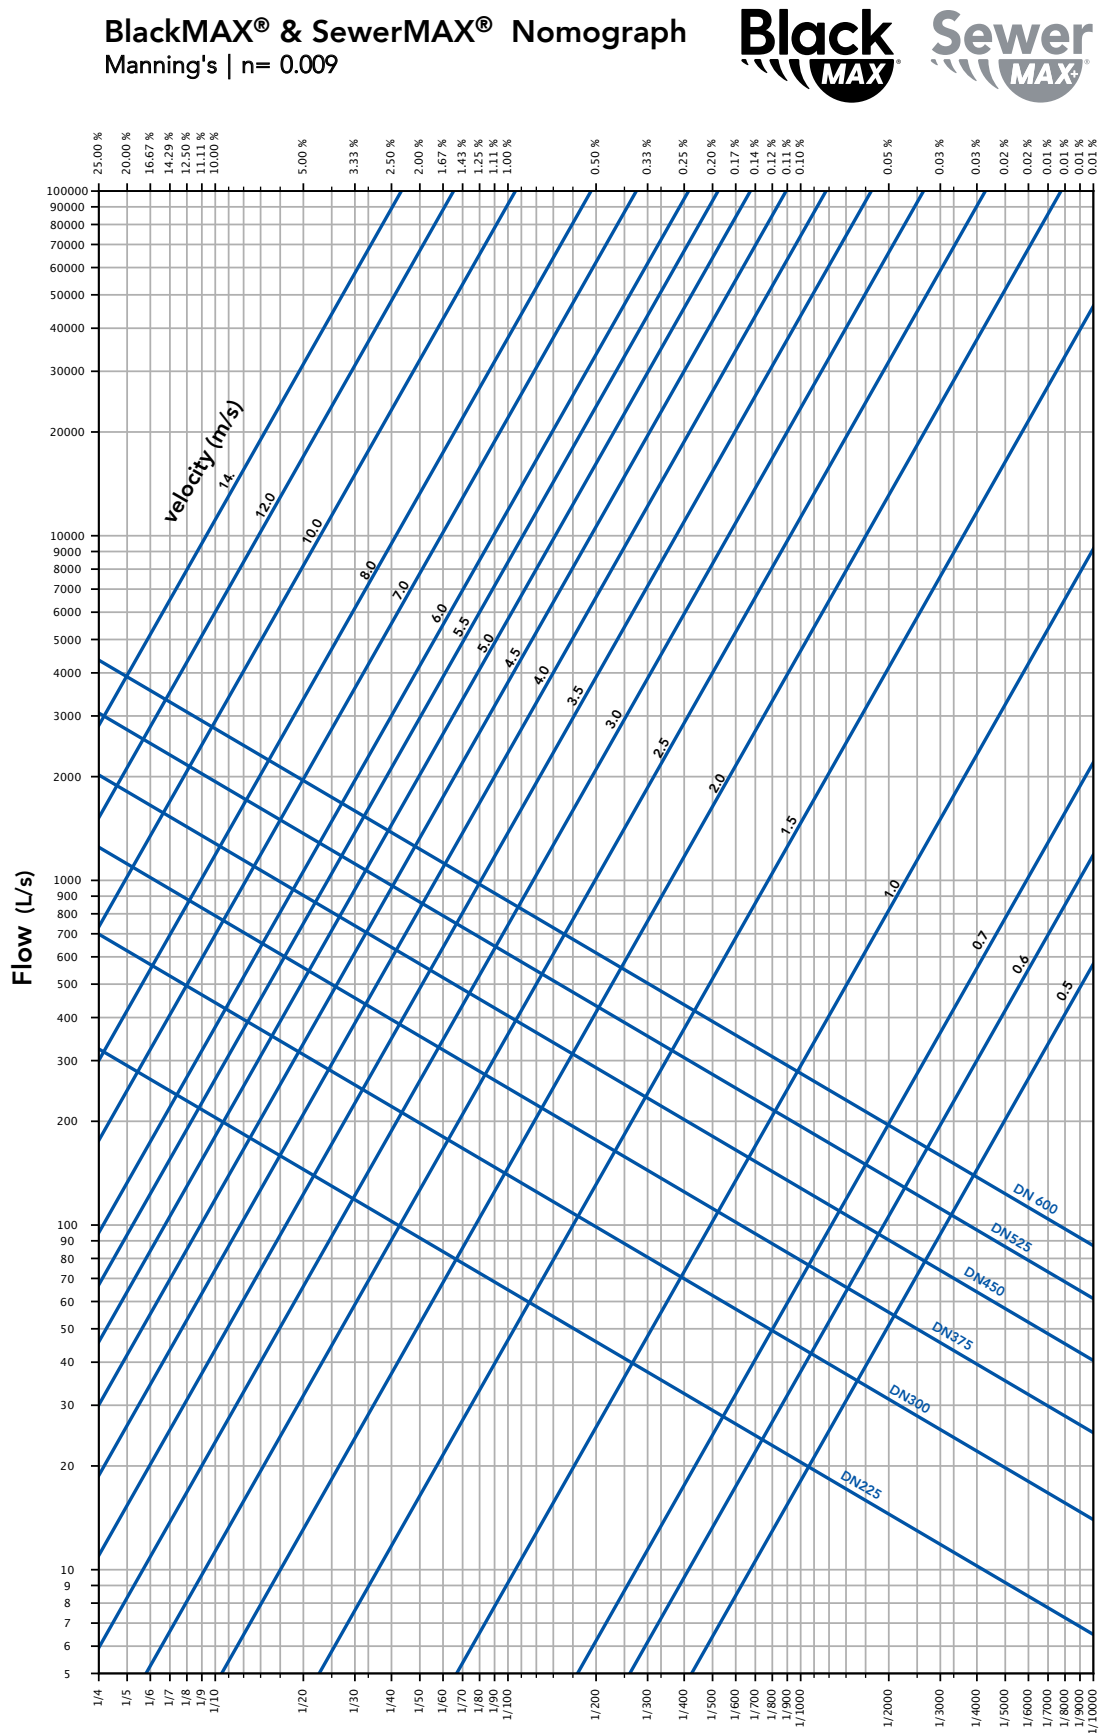

The graph shown is for guidance only.



### 3.1.1 STORMWATER DRAINAGE DESIGN

The design of drainage pipe networks is discussed in 'Australian Rainfall and Runoff' published by the Institution of Engineers Australia. There are differences compared with other applications due to the frequency of inlets and junction pits having a significant effect on the hydraulic capacity of the system and high head losses.

Pits may be rectangular, circular, benched, or un-benched, with or without lateral pipe inlets, entries from gutters in roadways collecting surface stormwater and often involve changes in flow direction. The value for  $K_L$  in Figure 3.5 can range from 0.2 to 2.5 or greater depending on the pit configuration. Appropriate values can be obtained from ARRB Report No. 34 'Stormwater drainage design in small urban catchments' by John Argue.

Another consideration affecting flow capacity is the debris and sediment load, which is often carried in stormwater flow.

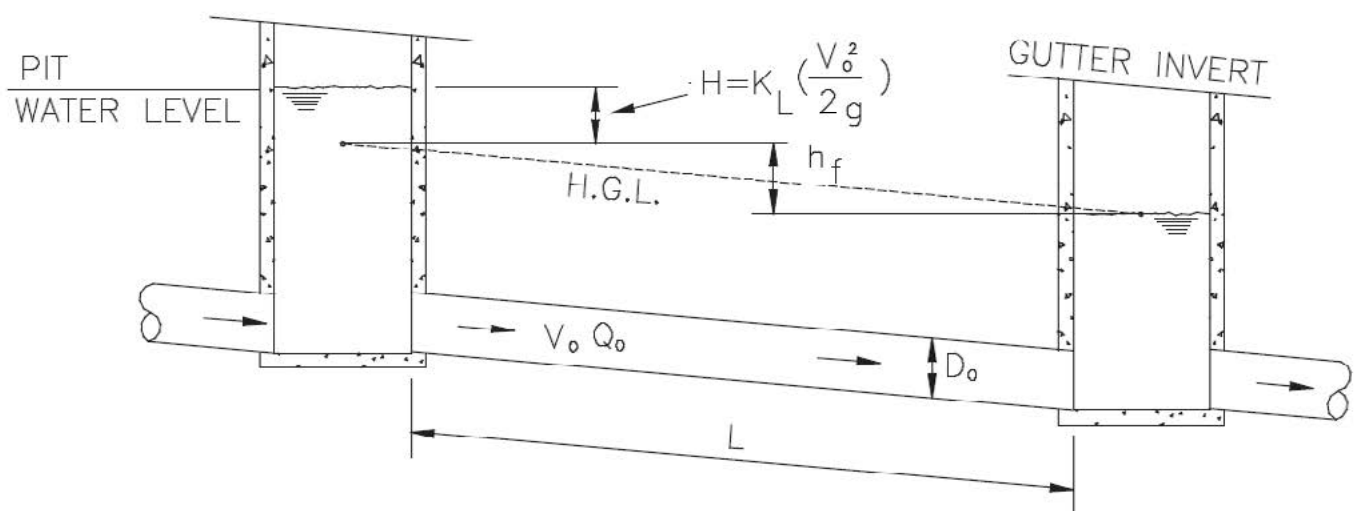


Figure 3.5 Head losses through Stormwater pits

### 3.1.2 VELOCITIES IN STORMWATER DRAINAGE PIPELINES - GENERAL

The minimum and maximum allowable velocities in a stormwater drainage pipeline are often specified as part of a drainage design process.

Minimum velocities are required in stormwater drains to reduce sedimentation and promote positive drainage through the pipeline at all depths. Generally, to enable a pipe to be capable of self-cleaning during dry weather flows, a minimum design flow velocity of at least 0.8m/s<sup>1</sup> for pipes running 1/3 full and 1m/s<sup>1</sup> for pipes running full is required for standard stormwater flows.

Whilst plastic pipes can carry clear water with high velocities without significant abrasion, there are other factors which indicate the need for a maximum velocity control in stormwater drains. For example, the use of other pipe materials, expected flow conditions, the type and quality of the pipe joints, stormwater pits and junctions. Therefore, stormwater drains generally have a maximum design flow velocity of 4.5m/s. Note maximum outfall velocities are more restrictive to protect water ways and land development areas from damage and extensive erosion.

<sup>1</sup>Melbourne Water Land Development Manual , 'Hydrologic and Hydraulic Design' Section 5.3.2 Pipe drains

### 3.1.3 HIGH VELOCITIES

High velocities within a drainage pipe system can cause problems and are summarised as follows:

- Abrasive wear and damage of pipe materials, fittings, and pits. Whilst this may have been a justified concern in the past with brick drains using mortar joints, modern drainage pipe materials such as polypropylene are not generally affected by abrasion in normal conditions
- Air entrapment can occur within the pipeline at high velocities which can reduce the capacity of the pipe in surcharged conditions
- Super critical flows within a drainage pipeline should be avoided. Where super critical flows are present, there is a risk of an obstruction causing a hydraulic jump and a surcharging of the pipeline
- Thrust restraints might be required in some high velocity conditions
- The inspection of pipes containing high velocity flows is unsafe and additional safety equipment and infrastructure may be required
- The discharge from the pipe outfall at high velocities can cause damage and erosion of the water body into which the pipe outfalls

Where the gradient of the pipe and the velocity is expected to be high, a flatter gradient and possibly larger diameter pipe can be installed to provide the same flow at a lower velocity. Additionally, backdrop maintenance holes can be used as energy dissipaters to reduce velocities.

While abrasion or cavitation is unlikely to be a concern, higher velocities do require additional checks on hydraulic performance such as super critical flows and greater energy losses at junctions. For this reason it is advised that any velocities above 3m/s are subjected to greater checks for normal drainage conditions. Where velocities greater than 6m/s<sup>1</sup> are expected, additional work should be completed to check that none of the detrimental effects including those listed in Section 3.1.3 are likely to become an issue.

<sup>1</sup>Melbourne Water Land Development Manual , 'Hydrologic and Hydraulic Design' Section 5.3.2 Pipe drain

### 3.1.4 SEWER DESIGN

The design of gravity sewers can be complex due to the assumptions, which must be made to cover the wide variations between storm flows and low dry weather flows. Although pipes must be sized to carry high wet weather flows, the size and grade of the pipeline must also meet self-cleansing criteria under dry weather conditions.

Acceptable design methods will vary between authorities and whether the system is to be designed for sewage flows only or combined sewage and stormwater flows. In Australia, the separated sewage flow is the usual requirement. Even so these systems often carry considerable stormwater flow in wet weather due to incidental inflow and infiltration of stormwater. For design purposes the normal average sewerage flow of say 0.003 L/s per head of population or equivalent population (EP) is increased by a series of empirical factors to allow for peak dry and wet weather flows. The resulting maximum design flow is therefore much higher than the estimated average flow. Sewer pipes are sized to carry the maximum design flow ( $Q_d$ ) flowing full. In addition, a check is made to ensure that in dry weather there will be enough flow to ensure self-cleansing at least once daily.

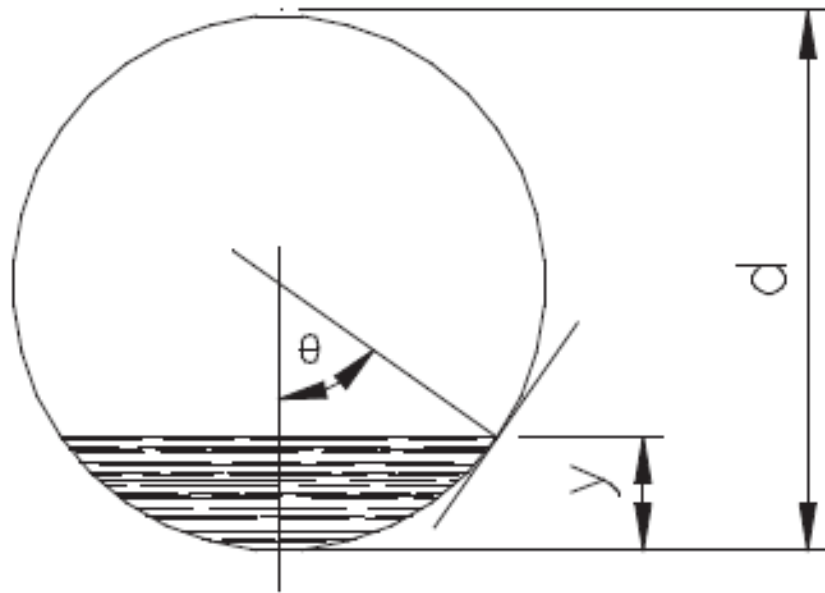


Figure 3.6 Angle of repose of sediment for a self-cleansing flow

Historically, the normal design criterion was that a partial flow with a self-cleansing velocity of 0.6 m/s had to be achieved once a day. Today most design methods are based on the Fluid Boundary Layer Shear Theory. Research on the movement of sand particles on submerged pipe perimeters at low flows show that deposition will occur on the flatter parts of the pipe invert when the slope of the pipe wall is less than  $\theta = 35^\circ$  Figure 3.6. The Boundary Layer design theory builds on this fact.

From open channel theory the following expression can be written in terms of average boundary shear stress ' $\tau$ '.

#### Equation 3.6

$$\tau = \rho \cdot g \cdot R \cdot S \quad \text{Pascals}$$

For a circular sewer flowing part full and since  $R_f = d/4$ , Equation 3.6 can be rewritten as:

#### Equation 3.7

$$\tau = \rho \cdot g \cdot \left( \frac{d}{4} \right) \cdot \left( \frac{R_p}{R_f} \right) \cdot S \quad \text{Pascals}$$

It can be assumed if ' $\tau$ '  $\geq 1.5$  Pa, the pipe invert will be self-cleansing. Therefore, taking this as the value for ' $\tau$ ', the minimum self-cleansing slope can be determined by rearranging Equation 3.7.


#### Equation 3.8

$$S_{min} = \frac{4\tau}{\rho \cdot g \cdot d \cdot \left( \frac{R_p}{R_f} \right)} \quad m/m$$

Using geometrical relationships and Manning's Equation 3.4, the hydraulic elements in Figure 3.7 have been developed to relate the flow, depth, and hydraulic mean radius ratios with each other. With the  $Q_p/Q_f$  ratio known, the depth to diameter ratio  $y/d$  can be found and then from this value the  $R_p/R_f$  ratio can be determined by substitution in Equation 3.8.



FIGURE 3.7 Proportional velocity and discharge in part-full pipes

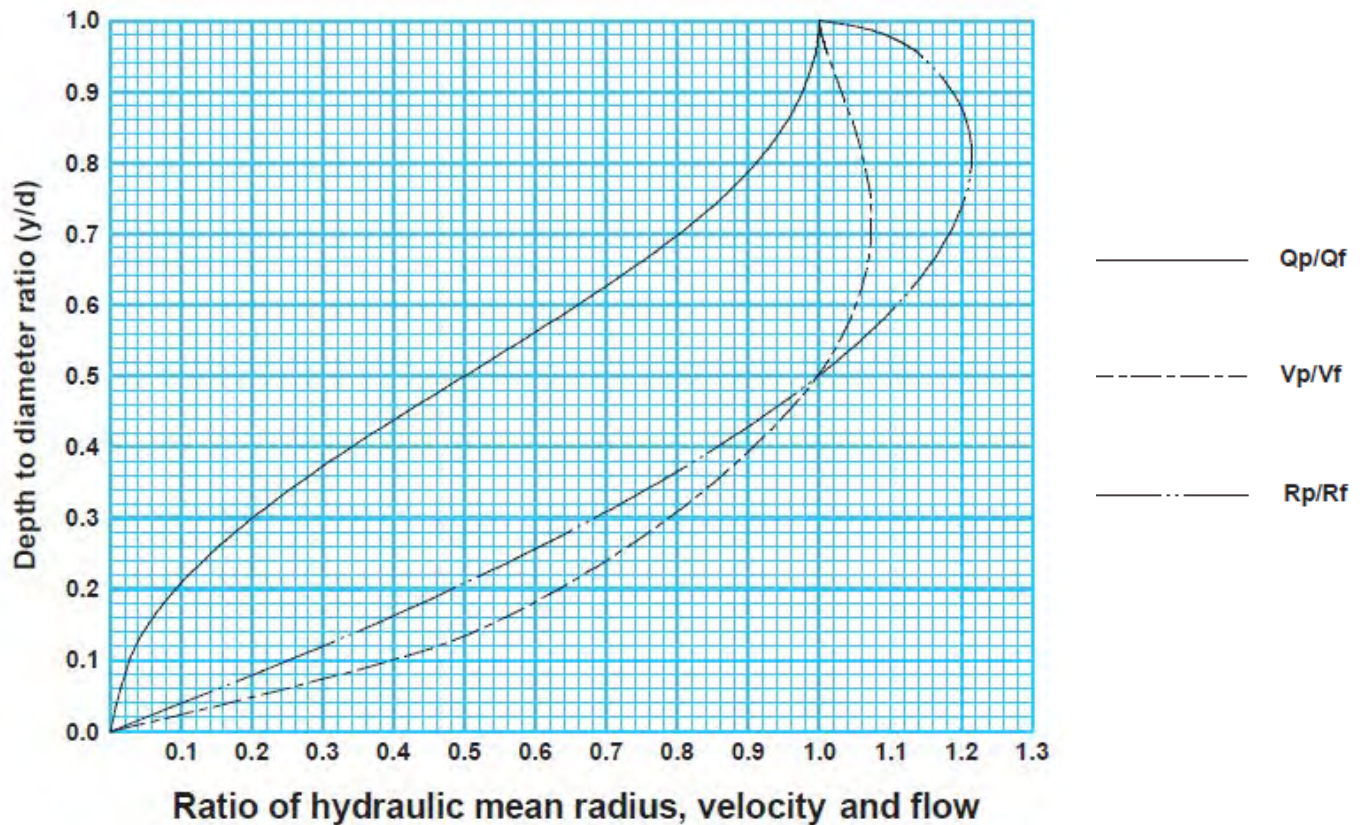

The graph shown is for guidance only.

## 3.2 STRUCTURAL DESIGN

In engineering terminology, BlackMAX® and SewerMAX® pipes are flexible pipes. They are designed to deform or deflect diametrically within specified limits without structural damage after installation.

External soil and live loads on buried flexible pipes will cause a small decrease in vertical diameter and simultaneously an increase in the horizontal diameter. The horizontal movement of the pipe walls into the soil material at the sides develops a passive resistance within the soil to support the external load. The soil type and density and height of water table (if present), all influence structural performance. The greater the effective soil modulus, the less the pipe will deflect and structural stability against buckling is also enhanced.

Information on an appropriate design procedure is given in Australian Standard AS/NZS 2566.1 'Buried flexible pipelines Part 1 - Structural design' and its Supplement.

BlackMAX® and SewerMAX® pipes are classified by their pipe stiffness (Table 3.2) and are suitable for a range of cover heights. (Figures 3.11 to 3.19).

**TABLE 3.2 BlackMAX® and SewerMAX® pipe stiffnesses and Classifications.**

Pipe	Pipe Stiffness	Classification
BlackMAX®	>8000 N/m/m	SN8
SewerMAX®	>10000 N/m/m	SN10
SewerMAX+®	>20000 N/m/m	SN20

To properly assess the effects of site conditions on a proposed installation, specific information is needed for structural design.

This includes:

- Pipe diameter (m)
- Cover height (m)
- Properties of Native soil at pipe depth
- Width of Embedment (m)
- Properties of Embedment material
- Height of Water table (m)
- Traffic loading
- Special requirements, such as concrete encasement or grouting

Professional advice should be obtained to determine the appropriate value of the effective soil deformation modulus for an installation. It will depend on the native soil type and condition, the pipe embedment material, its degree of compaction and its geometry (e.g. trench width and embedment width).


Geotechnical surveys giving soil types and properties, including soil-bearing capacities, SPT (Standard Penetration Test) values at pipe depth and embedment compaction will be relevant to the design.



The following notations are used in this Section:

Notation	Description	SI unit
$a$	The radius of applied circle of loading	m
$b$	Embedment width on each side of the pipe at spring line	m
$B$	Trench width at the pipe spring-line	m
$D$	Overall outside diameter of the pipe	m
$E'_e$	Embedment soil deformation modulus	MPa
$E'_n$	Native soil deformation modulus	MPa
$E'$	Combined soil deformation modulus	MPa
$H$	Cover height	m
$h$	Bedding thickness	m
$k$	Overlay thickness	m
$p$	Presumptive (allowable) bearing pressure	kPa
$\Delta$	Displacement or settlement	m
$\xi$	Leonhardt factor	

FIGURE 3.8 Critical dimensions for design and installation

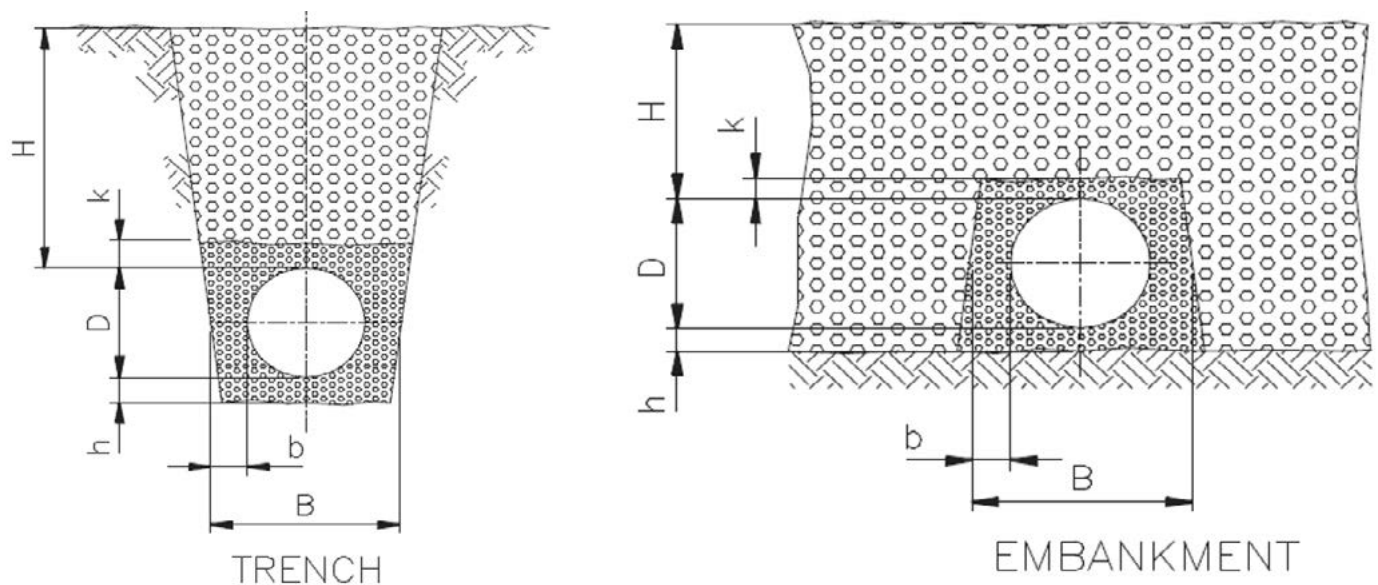



### 3.2.1 GEOTECHNICAL INVESTIGATION

The conventional approach to a pipeline route investigation has been to assess the soil conditions at pipe depth by carrying out a drilling and soil sampling program along the alignment. While the intention in the past was often only to determine the presence of rock and to estimate trench stability for construction purposes, this investigation is now used for more detailed geotechnical reporting and includes additional information readily obtained from routine surveys. It includes design data such as the Standard Penetration Test (SPT), blow counts (at pipe depth), identification of native soil type and depth of water table. The designer will also require an assessment of the embedment material surrounding the pipe and the specified compaction procedure.

### 3.2.2 DERIVATION OF SOIL DEFORMATION MODULUS VALUES

The correct choice of soil moduli will have significant effects on design decisions. An approximate conversion of SPT blow counts to soil moduli is given in Table 3.2 of Australian Standard AS/NZS 2566.1. Often this is contained in records obtained over many years and frequently gives correlations between SPT and allowable soil bearing pressures.


The soil deformation moduli stated in AS/NZS 2566.1 were originally derived from European design practice using soil bearing plate tests. These moduli are generally about half the value of deformation moduli measured using standard laboratory tri-axial tests and should not be confused with these. Using allowable foundation bearing pressures, it is possible to derive the plate load or pipe design soil moduli from the Boussinesq's plate bearing theory for an elastic, homogenous, isotropic solid. That is for a rigid plate and a soil Poisson's ratio of 0.5.

For the purposes of obtaining a derivation, it can be assumed that the plate is a standard 750mm diameter and the allowable settlement is 15mm. Equation 3.9 provides a conversion relationship,  $E'_n = 0.03p$ . Table 3.3, which is based on data published by Sowers<sup>1</sup> (1979), shows the result of applying this factor. Similarly Figures 3.9 and 3.10 give deformation moduli obtained by converting other published data (Hough 1959, Clegg 1996).


Values of the soil deformation moduli are needed for both the native and embedment soils within 2.5 x the pipe diameter on each side of the pipe centreline. The modulus for a given pipe embedment soil  $E'_e$  can be estimated from Table 3.4.

#### Equation 3.9

$$\Delta = \frac{1.18.p.a}{E'_n} .10^{-3} \quad m$$

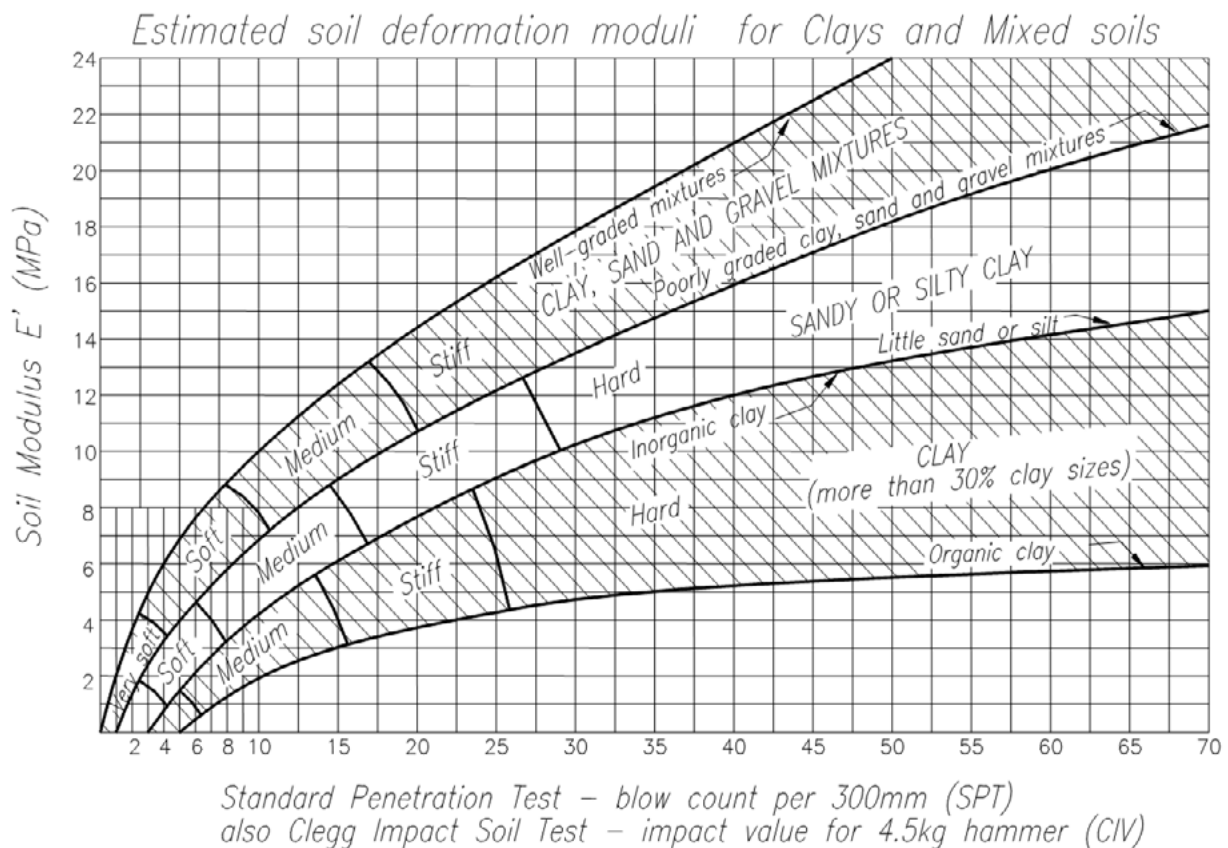**FIGURE 3.9**


The graph shown is for guidance only.

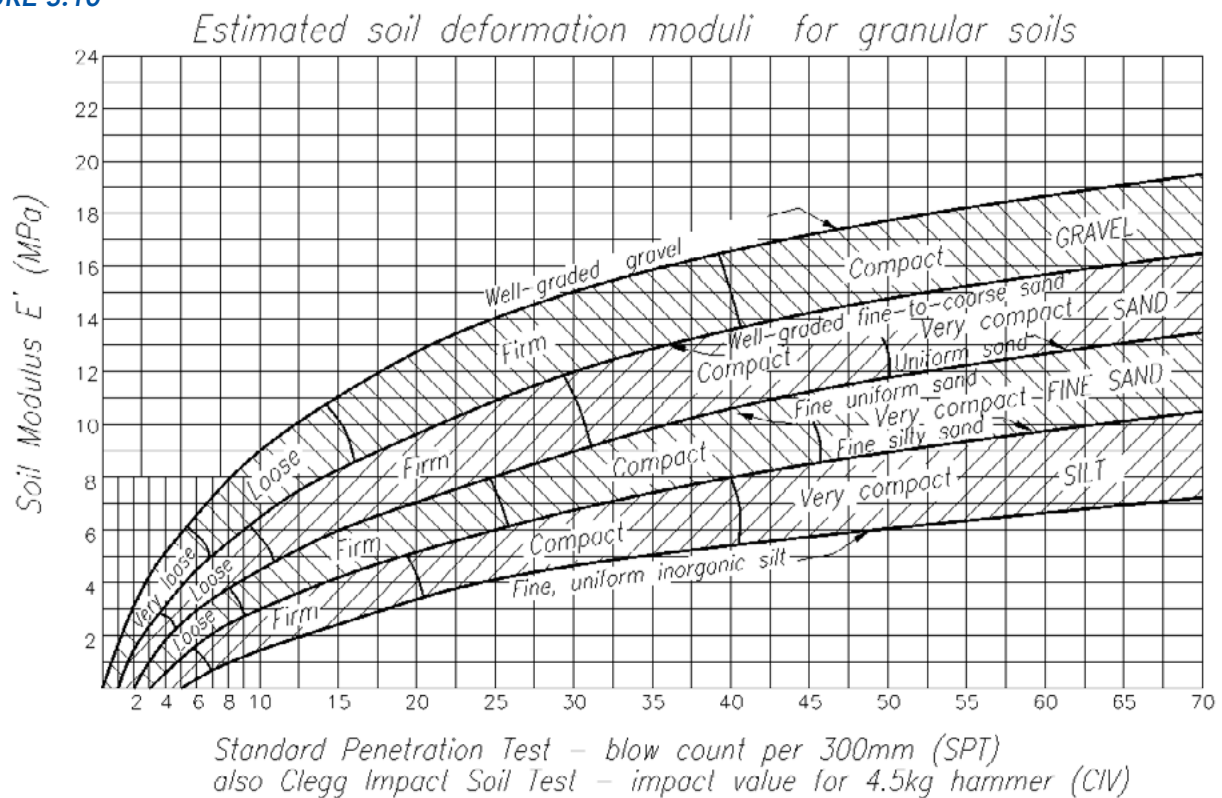**FIGURE 3.10**


*Note! Saturated silts and sands will have strength reduced by approximately 50% over "dry" or "moist" conditions*

The graph shown is for guidance only.

**TABLE 3.3 Typical allowable foundation pressures converted to native soil moduli**

Soil Description	Standard Penetration Resistance – blow count over 300 mm	Allowable foundation bearing pressures p (kPa)	Derived soil deformation moduli $E'_n$ using Eq 3.7 (MPa)
Loose sand, dry	5 - 10	70 - 140	2.1 – 4.2
Firm sand, dry	11 - 20	150 – 300	4.5 – 9.0
Dense sand, dry	31 – 50	400 – 600	12 – 18
Loose sand, inundated	5 – 10*	40 – 80	1.2 – 2.4
Firm sand, inundated	11 – 20*	80 – 170	2.4 – 5.1
Dense sand, inundated	31 – 50*	240+	7+
Soft clay	2 – 4	30 – 60	0.9 – 1.8
Firm clay	5 – 8	70 – 120	2.1 – 3.6
Stiff clay	9 – 15	150 – 200	4.5 – 6.0
Hard clay	30+	400+	12+
Heavily fractured or partially weathered rock	50+	500 - 1200	15 - 36

**TABLE 3.4 Embedment soil moduli**

*SPT before inundation			
Soil Description	Standard dry density ratio (%)	Density Index (%)	Deformation moduli $E'_s$ (MPa)
Aggregate – single size	-	Uncompacted	5
		50	6
		60	7
		70	10
Aggregate - graded	-	Uncompacted	3
		50	5
		60	7
		70	10
Crushed rock	-	Uncompacted	1
		85	3
		90	5
		95	7
Sand and coarse-grained soil with less than 12% fines	-	Uncompacted	1
		85	3
		90	5
		95	7
Coarse grained soil with more than 12% fines	-	85	1
		90	3
		95	5

\*Note: These values are given in AS/NZS2566.1 - Buried Flexible Pipelines, Part 1 Structural Design



TABLE 3.5 Leonhardt correction factor  $\xi$ 

B/D	$E'_e/E'_n$						
	0.2	0.4	0.8	1	2	4	6
1.5	2.4	1.8	1.2	1.0	0.6	0.3	0.2
2.0	1.7	1.5	1.2	1.0	0.6	0.4	0.3
2.5	1.5	1.3	1.1	1.0	0.7	0.5	0.4
3.0	1.2	1.2	1.0	1.0	0.8	0.6	0.5
4.0	1.0	1.0	1.0	1.0	1.0	0.9	0.8
5.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

### 3.2.3 EFFECTIVE SOIL MODULUS

Knowing the proportion of embedment and native soil in the side support zone, trench width to pipe diameter (B/D) and the ratio of embedment modulus to native soil modulus ( $E'_e/E'_n$ ), the Leonhardt factors  $\xi$  given in Table 3.5 enable an overall effective soil modulus  $E'$  to be determined using the equation:

Equation 3.10

$$E' = \xi E'_e \quad \text{MPa}$$

TABLE 3.6 Trench widths and pipe spring-line

DN	Trench width* at the pipe spring-line 'B' (Figure 3.8)
225	Overall outside diameter of the pipe 'D' + 0.3m
300	
375	
450	Overall outside diameter of the pipe 'D' + 0.4m
525	
600	
750	Overall outside diameter of the pipe 'D' + 0.6m
900	
1000	
1200	

\*Note: The objective is to achieve uniform compaction of the embedment material. The trench widths might provide insufficient clearances for installation purposes in certain circumstances.




TABLE 3.7 Minimum cover heights (AS/NZS 2566.1)

Location	Minimum height of cover H (m)*
Not subject to vehicular loading	0.30
Subject to vehicular loading	
- not in roadways	0.45
- in sealed roadways	0.60
- in un-sealed roadways	0.75
Pipes in embankment conditions or subject to construction equipment loading	0.75

Figures 3.11 to 3.19 are applicable for BlackMAX® SN8, SewerMAX® SN10 and SewerMAX+® SN20 pipes with the following pipe design parameters, and give an estimate of maximum safe cover heights.

- Minimum Trench widths in accordance with AS/NZS 2566.1
- Maximum long-term vertical pipe deflection 7.5%
- Buckling factor of safety of 2.5
- SM1600 Traffic loading
- Density of trench fill over the pipe 20kN/m<sup>3</sup>


FIGURE 3.11

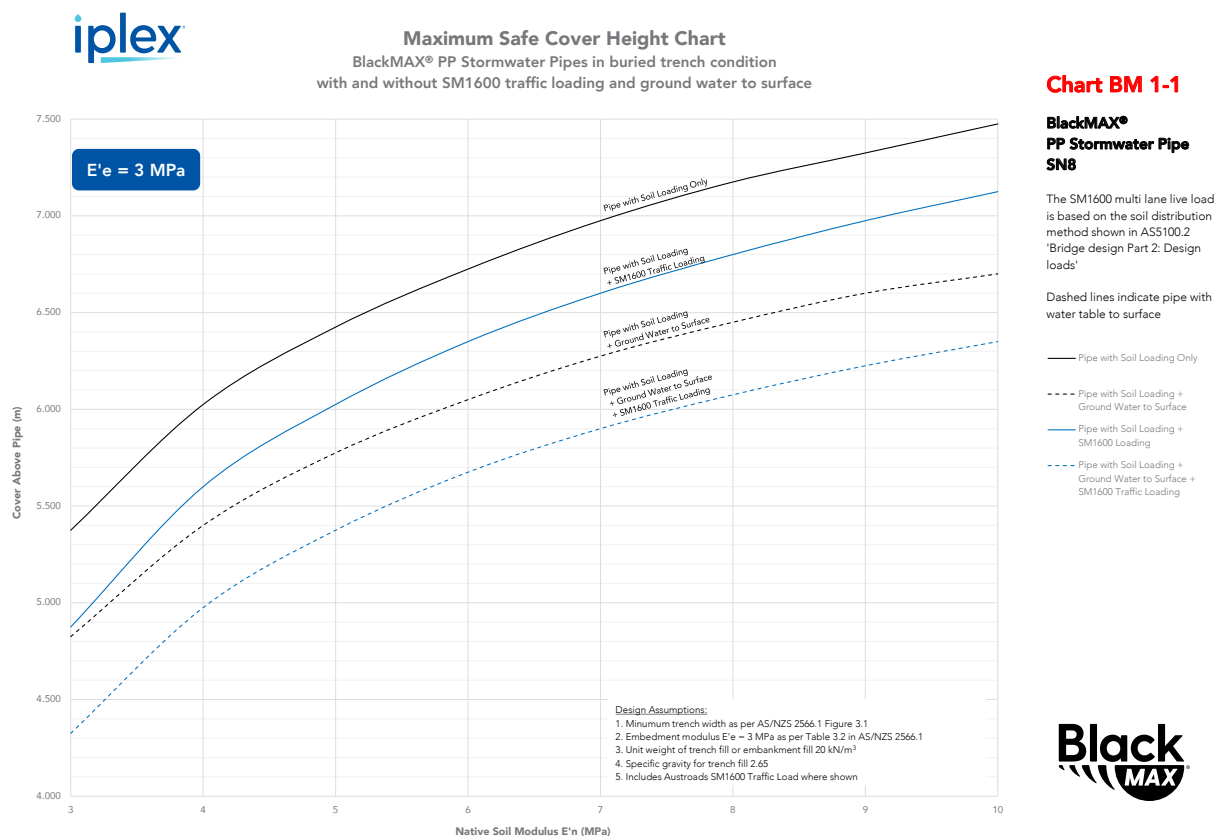

The graph shown is for guidance only.




FIGURE 3.12

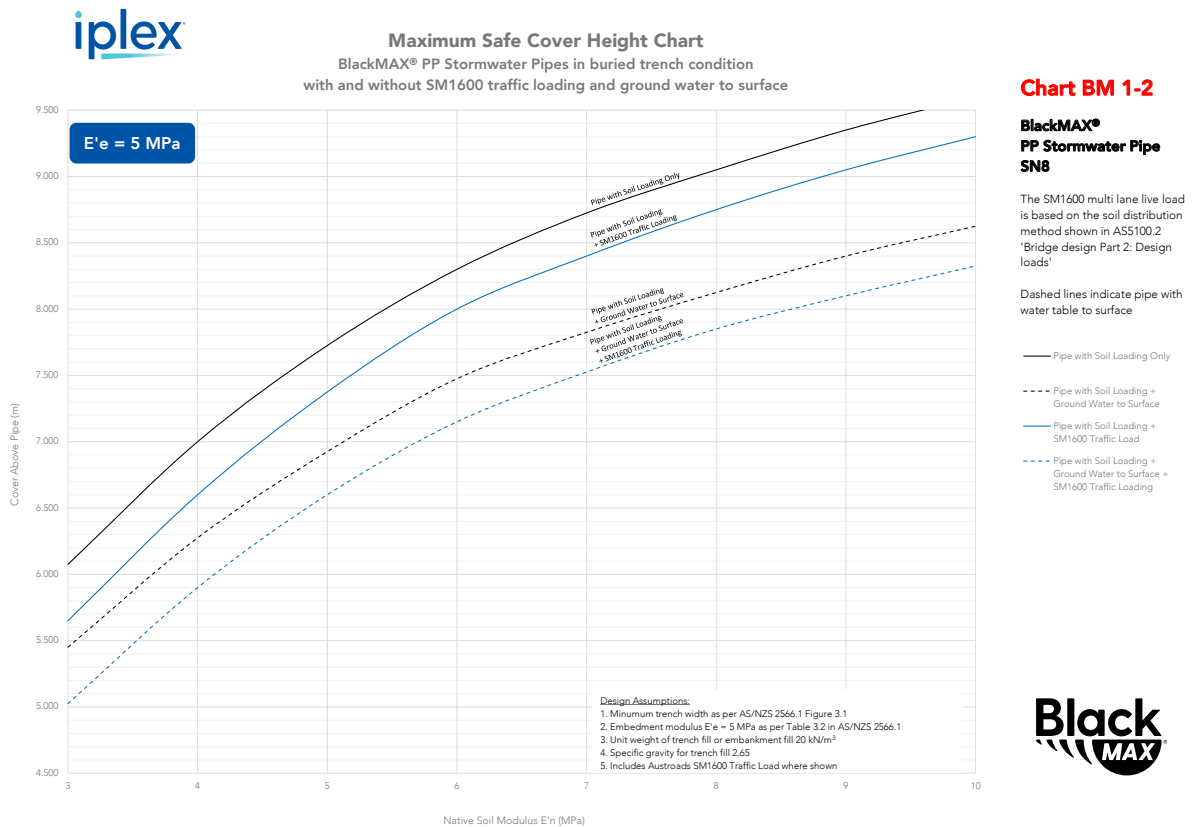


The graph shown is for guidance only.

FIGURE 3.13

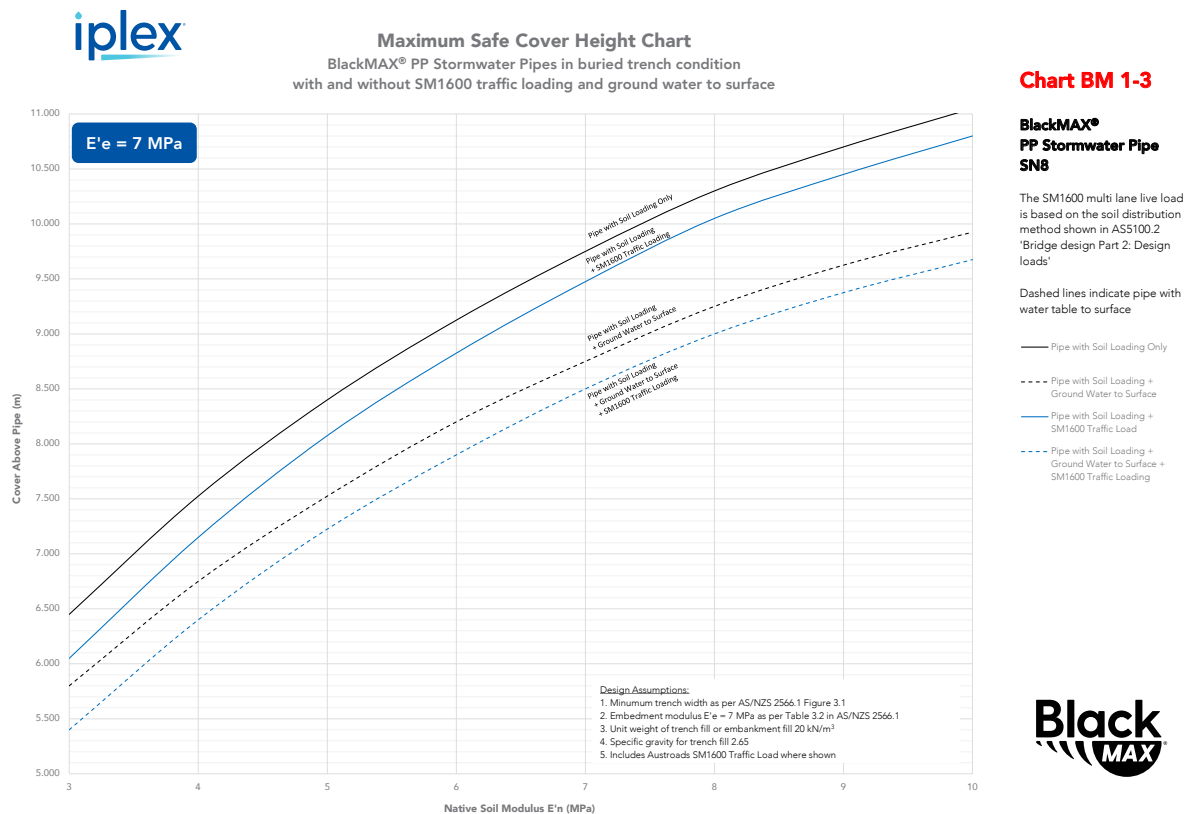

The graph shown is for guidance only.

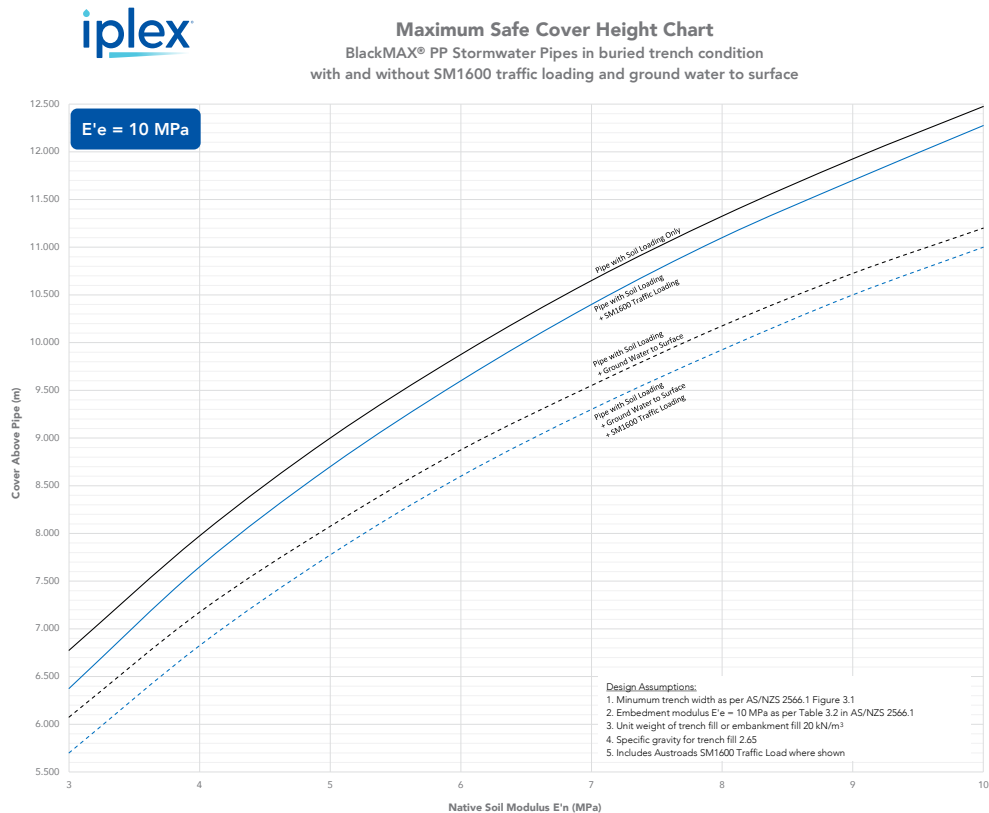

**FIGURE 3.14**

**Chart BM 1-4**
**BlackMAX®  
PP Stormwater Pipe  
SN8**


The SM1600 multi lane live load is based on the soil distribution method shown in AS100.2 'Bridge design Part 2: Design loads'

Dashed lines indicate pipe with water table to surface

- Pipe with Soil Loading Only
- - - Pipe with Soil Loading + Ground Water to Surface
- Pipe with Soil Loading + SM1600 Traffic Loading
- - - Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Loading



The graph shown is for guidance only.

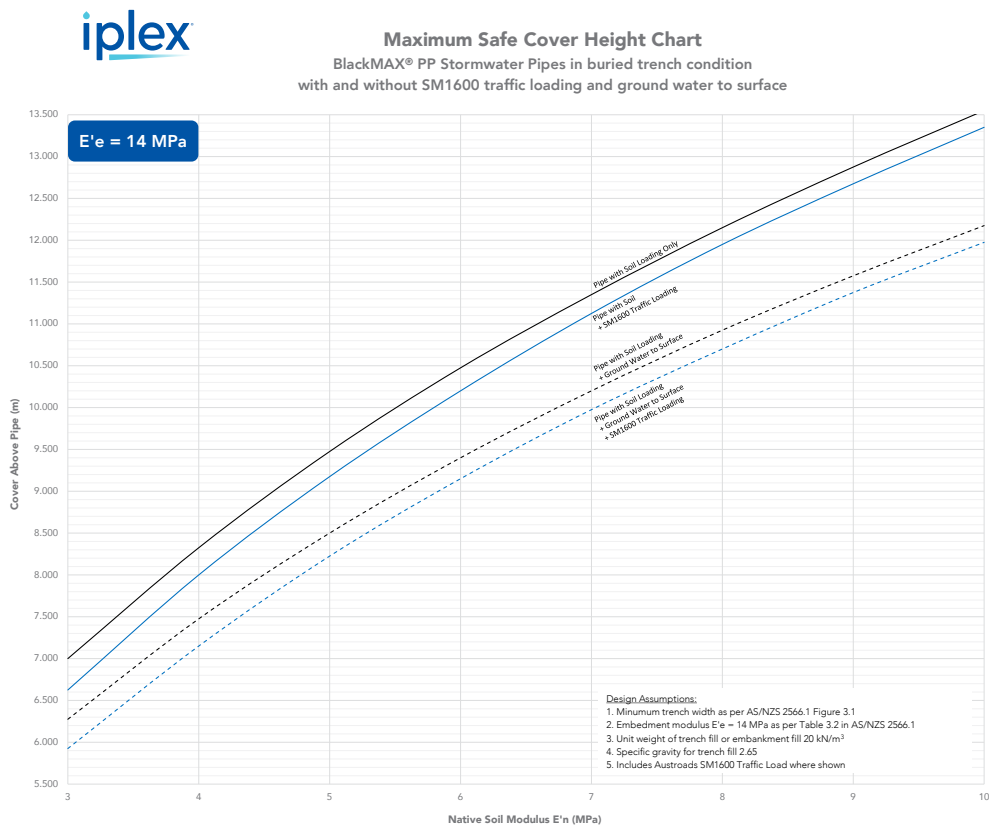**FIGURE 3.15**

**Chart BM 1-5**
**BlackMAX®  
PP Stormwater Pipe  
SN8**

The SM1600 multi lane live load is based on the soil distribution method shown in AS100.2 'Bridge design Part 2: Design loads'


Dashed lines indicate pipe with water table to surface

- Pipe with Soil Loading Only
- - - Pipe with Soil Loading + Ground Water to Surface
- Pipe with Soil Loading + SM1600 Traffic Loading
- - - Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Loading




The graph shown is for guidance only.

FIGURE 3.16

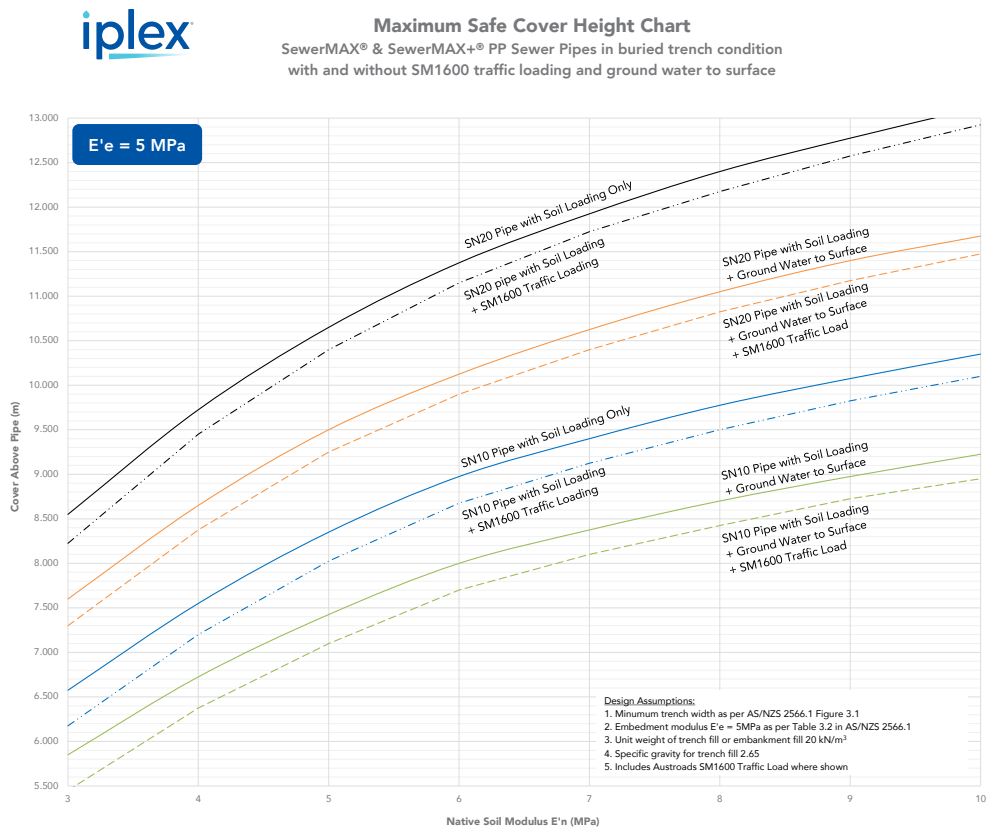

The graph shown is for guidance only.

FIGURE 3.17

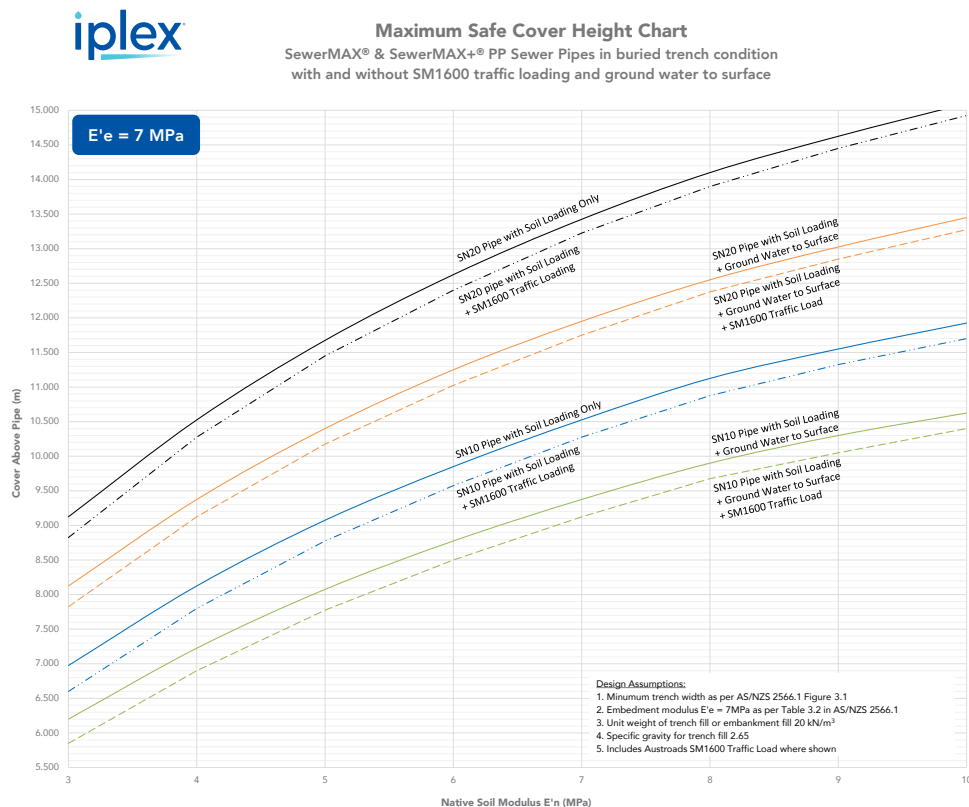

The graph shown is for guidance only.

### Chart SM 1-1

#### SewerMAX® SN10 & SewerMAX+® SN20 PP Sewer Pipe

The SM1600 multi lane live load is based on the soil distribution method shown in AS5100.2 'Bridge design Part 2: Design loads'

Dashed lines indicate pipe with water table to surface

- SN10 Pipe with Soil Loading Only
- SN20 Pipe with Soil Loading Only
- SN10 Pipe with Soil Loading + Ground Water to Surface
- SN20 Pipe with Soil Loading + Ground Water to Surface
- SN10 Pipe with Soil Loading + SM1600 Traffic Loading
- SN20 Pipe with Soil Loading + SM1600 Traffic Loading
- SN10 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load
- SN20 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load



### Chart SM 1-2


#### SewerMAX® SN10 & SewerMAX+® SN20 PP Sewer Pipe

The SM1600 multi lane live load is based on the soil distribution method shown in AS5100.2 'Bridge design Part 2: Design loads'


Dashed lines indicate pipe with water table to surface

- SN10 Pipe with Soil Loading Only
- SN20 Pipe with Soil Loading Only
- SN10 Pipe with Soil Loading + Ground Water to Surface
- SN20 Pipe with Soil Loading + Ground Water to Surface
- SN10 Pipe with Soil Loading + SM1600 Traffic Loading
- SN20 Pipe with Soil Loading + SM1600 Traffic Loading
- SN10 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load
- SN20 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load

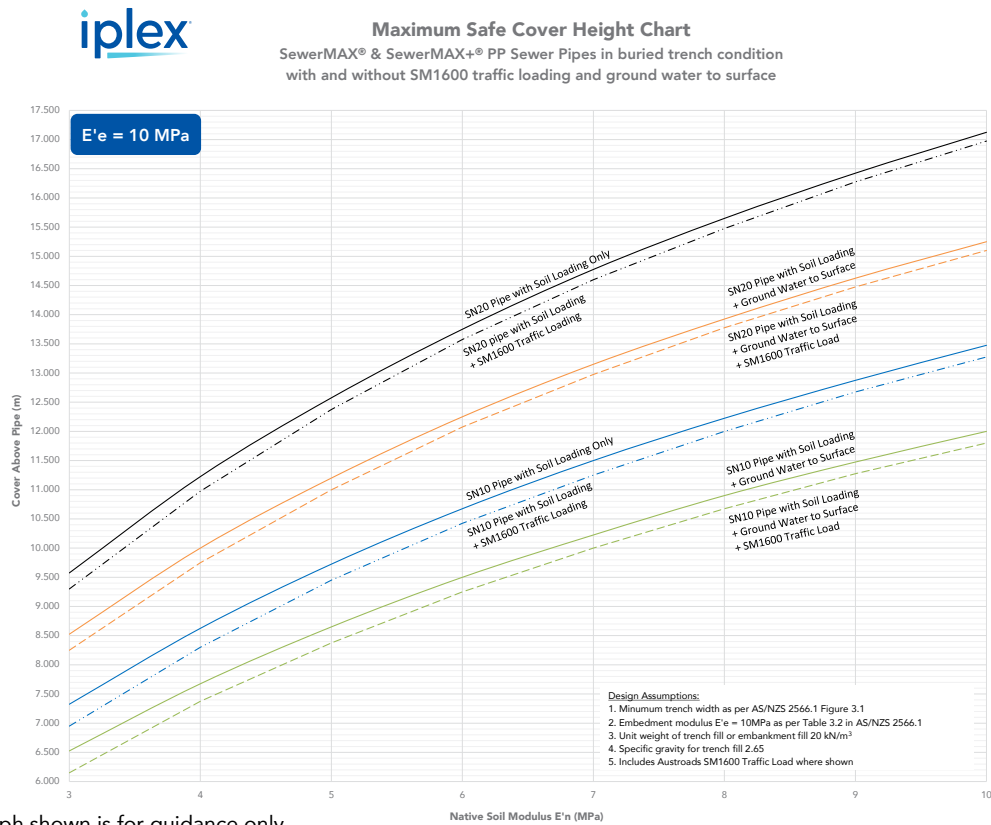

**FIGURE 3.18**


The graph shown is for guidance only

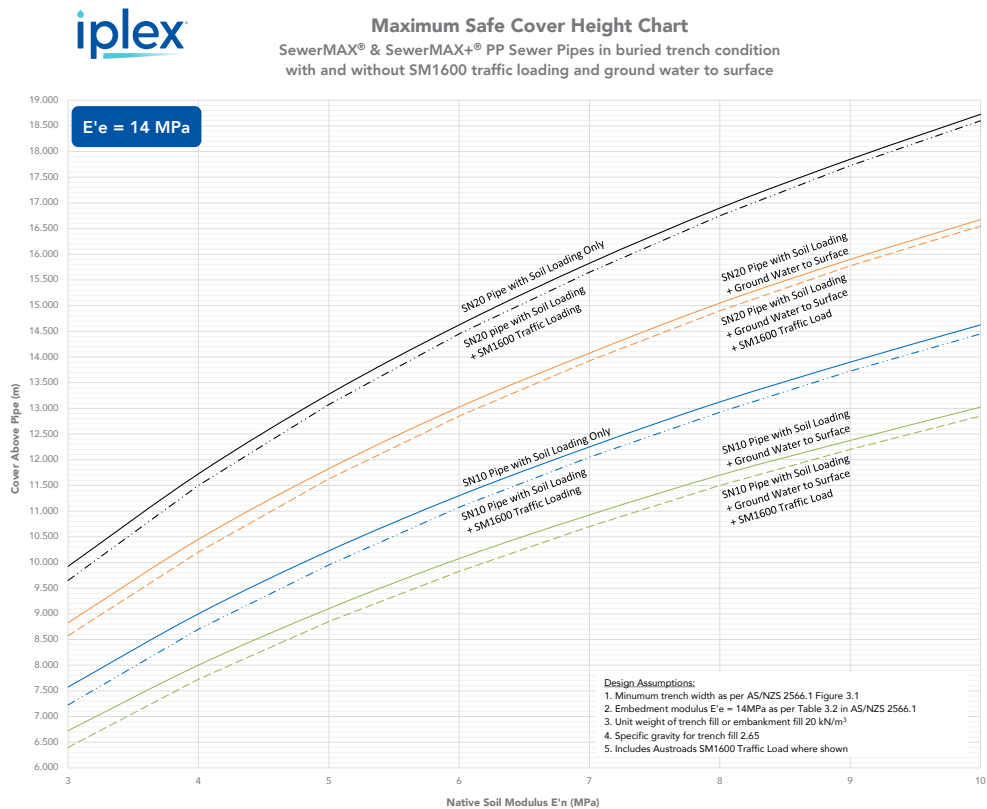**FIGURE 3.19**


Assuming a density of 20kN/m<sup>3</sup> for the trench fill over the pipe, **Figures 3.11 to 3.19**, will then give an estimate of the maximum safe cover heights.

The graph shown is for guidance only

**Chart SM 1-3**
**SewerMAX® SN10 & SewerMAX+® SN20 PP Sewer Pipe**

The SM1600 multi lane live load is based on the soil distribution method shown in ASS100.2 'Bridge design Part 2: Design loads'

Dashed lines indicate pipe with water table to surface

- SN10 Pipe with Soil Loading Only
- SN20 Pipe with Soil Loading Only
- SN10 Pipe with Soil Loading + Ground Water to Surface
- SN20 Pipe with Soil Loading + Ground Water to Surface
- SN10 Pipe with Soil Loading + SM1600 Traffic Loading
- SN20 Pipe with Soil Loading + SM1600 Traffic Loading
- SN10 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load
- SN20 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load


**Chart SM 1-4**
**SewerMAX® SN10 & SewerMAX+® SN20 PP Sewer Pipe**

The SM1600 multi lane live load is based on the soil distribution method shown in ASS100.2 'Bridge design Part 2: Design loads'

Dashed lines indicate pipe with water table to surface

- SN10 Pipe with Soil Loading Only
- SN20 Pipe with Soil Loading Only
- SN10 Pipe with Soil Loading + Ground Water to Surface
- SN20 Pipe with Soil Loading + Ground Water to Surface
- SN10 Pipe with Soil Loading + SM1600 Traffic Loading
- SN20 Pipe with Soil Loading + SM1600 Traffic Loading
- SN10 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load
- SN20 Pipe with Soil Loading + Ground Water to Surface + SM1600 Traffic Load



### 3.2.4 EFFECTS OF CONSTRUCTION LOADS ON BURIED BLACKMAX® AND SEWERMAX® (PP) PIPES

The recommended minimum (final) cover heights for buried flexible pipelines in different installation conditions are tabulated in Australian Standard AS/NZS 2566.2 and are empirically derived from accepted installation practice. They are similar for rigid pipes.

However, some authorities have requested information on the performance of flexible pipes under construction loads where cover heights may be considerably lower. A theoretical evaluation is possible using the design procedures for flexible pipes given in AS/NZS 2566.1 Clause 4.7 'Super-imposed Live Loads' provided that these covers may be less than the prescribed design minimum. That is at covers less than 400mm where loads are due to compaction equipment, it is reasonable to assume there will be some load dispersion, but this will reduce progressively in a linear fashion to zero, as covers reduce from 400mm to zero.

Minimum (construction) cover heights have been calculated using this approach. Assumptions have been made with the native soil modulus values of 3MPa being considered appropriate. This corresponds to a firm clay with a presumptive foundation bearing pressure of about 100kPa or SPT blow count of 6+ per 300mm. A firm inundated sand would have a similar modulus. The embedment modulus has been taken to be 7MPa from AS/NZS 2566.1 as this is typical of good quality embedment material. The calculated minimum covers for the range of compaction equipment are given in Table 3.8 .

**TABLE 3.8 Compaction equipment with minimum cover heights calculations  $B/D \geq 1.66$**

Type	Vibratory Rammer (75kg)	Vibratory Trench Roller (2T)	Excavator compaction wheel (25T)	Vibratory Smooth drum Roller (17T)	Vibratory Smooth drum Roller (7T)	Vibrating Plate (240kg)
Model	BS62Y			CAT CS653		
Number of axles	1	2	1	1	1	1
Axle spacings	N/A	970mm	N/A	N/A	N/A	N/A
Bearing length 'a'	330mm	200mm	200mm	200mm	100mm	500mm
Bearing length 'b'	330mm	865mm	580mm	2200mm	1676mm	500mm
Wheel load 'P'	33KN	72KN	155KN	218KN	162kN	37kN
Minimum Cover Heights using compaction equipment (mm)						
Pipe Stiffness (N/m/m)	Vibratory Rammer (75kg)	Vibratory Trench Roller (2T)	Excavator compaction wheel (25T)	Vibratory Smooth drum Roller (17T)	Vibratory Smooth drum Roller (7T)	Vibrating Plate (240kg)
SN8	300mm	425mm	850mm	650mm	625mm	200mm
SN10	250mm	375mm	800mm	600mm	600mm	175mm
SN20	200mm	300mm	675mm	475mm	475mm	100mm

B = trench width at spring line, D = external pipe diameter



On site, the effect of compaction equipment on flexible pipes can be checked by monitoring changes in ring deflection. Details of allowable deflections are given in Clause 5.7 of AS/NZS 2566.2. Although higher ring deflections will not damage polypropylene pipes, excessive initial ring deflections, e.g. more than 4%, must be avoided as the magnitude of the deflection after installation is often used as the prime indicator of whether the specified side support compaction has been achieved. Compaction of the side support zone before allowing the compaction equipment to operate on the overlay above the pipe will assist in this respect. Where the allowable limit has been exceeded the pipeline installation may be rejected. In these circumstances it may be acceptable to recover and re use the same pipes with increased side support compaction.

### **PocketENGINEER™ Structural Design Tool**

To assist designers with the specification of structurally effective flexible pipeline installations, Iplex has developed a web based flexible pipe structural design tool. Alongside several other helpful design tools, this new addition is accessible to customers via the Iplex PocketENGINEER™ portal ([www.pocketengineer.com.au](http://www.pocketengineer.com.au)).

The structural design tool considers project specific inputs such as pipe types and sizes, trench and loading conditions and advises if the installation design meets the relevant requirements of AS2566.

A design report can be prepared and shared with other PocketENGINEER™ users for review. Various saved designs can also be collated into a useful comparison report to help establish the most efficient system possible.

To access the tool, simply visit [www.pocketengineer.com.au](http://www.pocketengineer.com.au) to register.

# PocketENGINEER™

## **4.0 INSTALLATION**

### **4.1 PLANNING**

Some thought and care must be given in preparing the site prior to receiving the pipes and fittings. Choose flat areas for pipe storage with safe vehicle access and ensure that it is possible to safely unload the pipes and fittings at the sites you have chosen. For example, crane trucks near overhead powerlines. Refer to Iplex's off site unloading and loading process's for guidance in exclusion zones on customer sites.

Note: The pack sizes and weights can be large and heavy, and may require suitable lifting equipment and machines to complete unloading safety.

### **4.2 TRANSPORTATION AND STORAGE**

Storing pipes correctly will limit any damage and help lead to safe working practices. Tins of pipe jointing lubricants must be stored securely, preferably in a lockable shed or container

attached with their chemical safety data sheet . Petroleum products, solvents and greases can damage rubber products and must not be stored with rubber sealing rings.

When receiving the load at the job site, check the timber packs. Wear puncture and cut proof gloves for protection against protruding nails. If they are broken and/or have moved, inspect each pipe for damage. Any damaged or missing items must be noted and quarantined for inspection.

### **4.3 UNLOADING**

Before unloading, it is critical that exclusion zones are implemented between the mobile plant and people on site.

Unloading packed pipes and loose pipes will require care to protect the loads and provide safety for the workers. Use approved and suitable lifting equipment. For example, forklift with padded Tynes, Crane, Backhoe, or excavator with certified and currently tagged nylon slings.

Always follow safe unloading requirements. Forklift and attachments must be load rated to suit the lifting requirements and attachment lengths of the product being

unloaded. For example, ensure the length of the tynes DO NOT push against the adjacent crates and or pipes on the far side of the truck. Do not stand under or near the pipe pack, pipe or fitting that is being lifted. Enforce SAFE exclusion zones around the pipes and fittings being lifted. If unsure speak with the forklift manufacturer for advice and information for your needs.

Webbing slings must be placed under and around the pipe pack. Do not use the pack's frame or straps for lifting. It is not designed for unloading.

Avoid climbing on the pipes for safety reasons. The surface can be slippery especially in wet or frosty conditions.

## 4.4 HANDLING

When handling BlackMAX® and SewerMAX® pipes and fittings always wear approved Personal Protective Equipment (PPE).

Although BlackMAX® and SewerMAX® pipes are notably resistant to impact, they must not be rolled, dropped, thrown, or encounter sharp objects likely to cause damage. Always avoid impact loads and always lower the pipes to the ground carefully.

When pipes are unloaded for storage they must be kept in their packs until required. The storage site must be level and free of obstructions. Allow enough space in between each pipe pack for lifting equipment to safely manoeuvre without causing accidental damage.

If pipes are not crated, they must be kept on horizontal supporting timbers at approximately 2 metre centres. These timbers can also be used to separate layers when pipes are stacked individually, which will facilitate the safe placement and removal of currently tagged and certified lifting slings.

Stack heights must be limited to prevent excessive deformation. ALL PIPES MUST BE RESTRAINED TO PREVENT ROLLING BY UNEVEN GROUND, WIND LOADS OR OTHER EXTERNAL FORCES.

Sockets must be protected from distortion during storage by ensuring all the sockets are placed at alternate ends and raised clear from ground and each other.

**TABLE 4.1 Pack specifications for BlackMAX® pipes**

DN	Approximate pack sizes			Pipes per pack (No)	Approximate mass of pack (Without timbers) (kg)	Pipes per semi-trailer
	Width (mm)	Height (mm)	Length (mm)			
225	1100	610	6300	8	176	128
300	1100	770	6330	6	216	72
375	920	940	6400	4	204	60
	or 1345			or 6	or 306	
450	1130	595	6500	2	152	32
525	1890	715	6500	3	276	24
600	2130	770	6500	3	360	18
750	TBC					
900	TBC					
1000	TBC					
1200	TBC					

**TABLE 4.2 Pack specifications for SewerMAX® & SewerMAX+® pipes**

DN	Approximate pack sizes			Pipes per pack (No)	Approximate mass of pack SewerMAX® SN10 (Without timbers) (kg)	Approximate mass of pack SewerMAX+® SN20 (Without timbers) (kg)	Pipes per semi-trailer
	Width (mm)	Height (mm)	Length (mm)				
225	1100	610	3300	8	96	128	256
300	1100	770	3300	6	132	174	108
375	920	940	3400	4	129	196	90
	or 1345			or 6	or 192	or 294	
450	1130	595	3500	2	84	120	48
525	1890	715	3500	3	165	243	36
600	2130	770	3400	3	201	NA	27
750	TBC						
900	TBC						
1000	TBC						
1200	TBC						


*Typical SewerMAX® and SewerMAX+® pack method ready for road transport*

## 4.5 INSTALLATION GUIDELINES

BlackMAX® and SewerMAX® are flexible pipes which are designed for controlled deflection under vertical soil loads. These loads are transferred to the soil in the side support zone, providing a very efficient pipe to soil interaction and high structural performance. Australian Standard AS/NZS 2566.2 'Buried flexible pipelines -Part 2 Installation' provides detailed information on appropriate methods for ensuring the side support zone is correctly constructed.

The most critical aspect for the successful installation of these pipes is the selection and compaction of the embedment, i.e. the material in contact with the pipe. Embedment material should be of a granular nature, which is readily compactable. Crushed rock, aggregate and graded sand are commonly used but occasionally native soils, (e.g. beach and Mallee sand) may also be suitable provided they are free flowing and readily compacted and provide permanent support over the service life of the pipeline. Appendices G and H of AS/NZS 2566.2 provide extensive guidance on the selection and use of a wide range of embedment materials.

**FIGURE 4.1 Buried pipeline terminology**

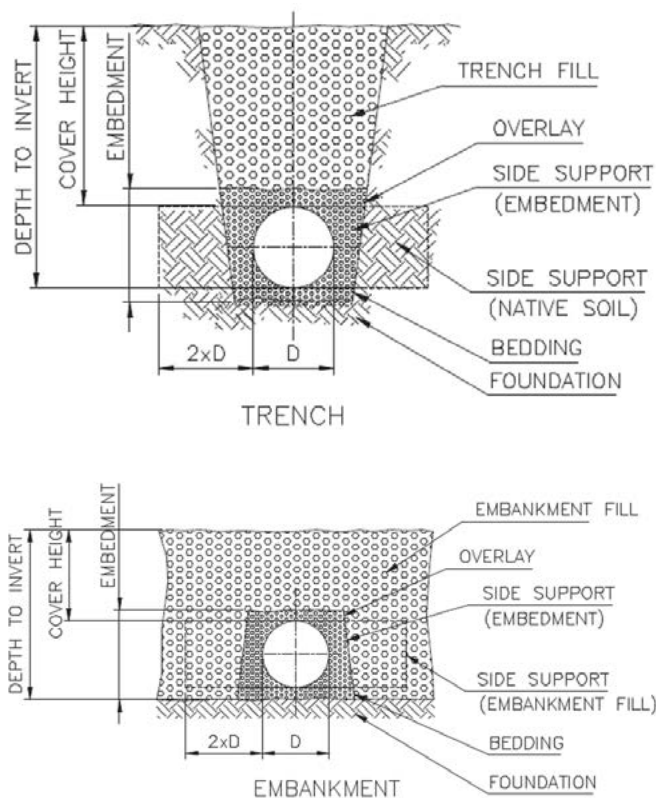

## 4.6 EXCAVATION AND ASSOCIATED WORKS

### 4.6.1 TRENCH EXCAVATION

Excavate the trench to the line and grade specified. The trench width must be enough to permit compaction of the pipe embedment materials with suitable equipment. The minimum pipe trench width required is dependent on the pipe diameter. Refer to Section 3.2.3, Table 3.6 for further information. The trench bottom must be even and free of soil clods and rocks.

### 4.6.2 FOUNDATION

The native soil in the foundation zone must be carefully excavated to grade permitting the pipeline to be correctly aligned and allowing for bedding material with a minimum thickness of 100mm (DN225 to DN375) and 150mm (DN450 to DN1200) beneath the pipe. If the bearing capacity of the foundation soil is thought to be less than 50 KPa it will need to be replaced with a mattress of embedment material. In this situation, geotechnical advice should be obtained.

### 4.6.3 UNSTABLE AND WET GROUND CONDITIONS

Wet and/or unstable soil conditions will require precautions to maintain firm and permanent side support for the pipes once installed. Where groundwater is present, there may be a risk of the fine soil particles migrating across the interface between the native and embedment soils. In this situation the embedment must be fully enveloped with geo-textile material. Details of soil gradings where this can occur are given in AS/NZS 2566.2.

Pipe installation must be carried out in a trench free of water. Where there is a continuing high rate of ground water inflow, it may be necessary to facilitate drainage of the trench using a porous layer of bedding material in the foundation zone. Generally, this will be a coarse granular material, which will need to be fully encapsulated in a geo-textile fabric. It is sometimes described as a drainage mattress.




## 4.6.4 TRENCH SHIELDS


Trench shields or soil boxes must be a close fit against the excavated trench walls and the bottom edges kept above the top of the pipe. If for safety reasons they must extend to the bottom of the trench, compaction of the embedment material after the shields are lifted will be necessary to eliminate any voids that may otherwise develop (see Figures 4.2 and 4.3).

Trench shields used in open excavations are prone to accumulate loose debris between the box and the trench wall. As this poor-quality material can adversely affect the available side support, it is good practice to place high quality embedment material to form part of the side support zone as soon as possible. This will exclude any debris or material which may slough from the trench wall (see Figure 4.4).


**FIGURE 4.2 Shields kept above side support**

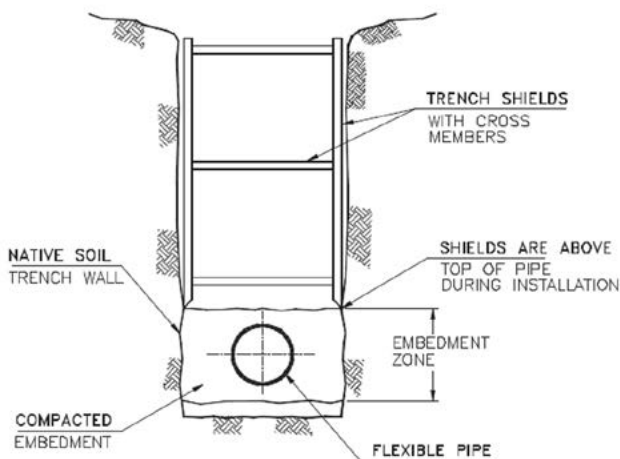

**FIGURE 4.3 Shields kept below pipe during installation**

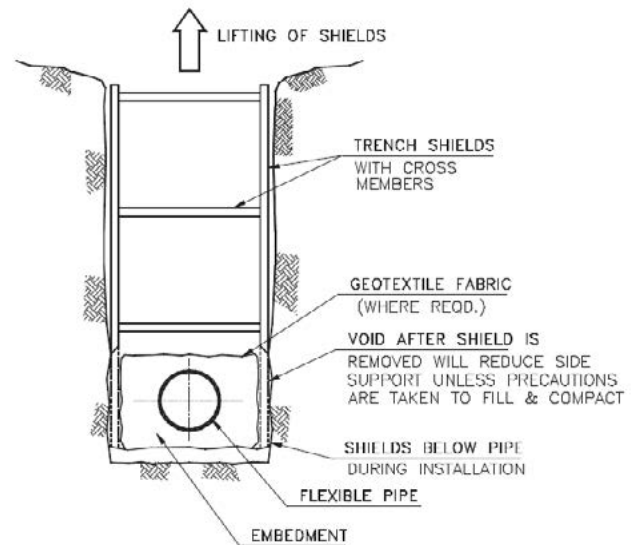

**FIGURE 4.4 Shields in wide trench**

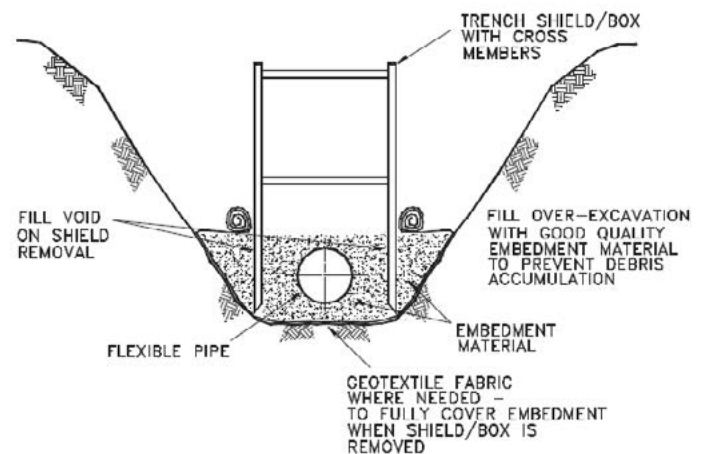



## 4.7 PIPE LAYING

### 4.7.1 BEDDING

The bedding material must be the same as the embedment used to surround the pipe. Its purpose is to provide uniform support and load distribution underneath the pipe barrel, the remaining embedment material and the backfill.

A layer of embedment material must be placed and compacted as the bedding. The bedding thickness must be a minimum of 100mm for pipe sizes DN225 to DN375 and 150mm for sizes DN450 to DN1200 or as specified. A small depression must be formed under each socket to ensure that the pipe barrel is evenly supported along its entire length. When laid to the specified alignment the pipes must be at the centreline of the trench.

If groundwater is present, the trench must be de-watered so that the pipes can be joined and installed in relatively dry conditions. In low strength soils, additional bedding material may be required as a replacement for unsatisfactory native material in the foundation zone.



*BlackMAX® pipes lowered into the trench with a nylon sling*





*Granular material spread evenly in the trench*

### 4.7.2 JOINTING OF PIPES

Once the trench and bedding has been prepared, pipes can be lowered into the trench with the aid of suitable slings or ropes. Chains must not be used to avoid potential slippage between the pipe and chains. Manual handling and lifting is possible with most BlackMAX® and SewerMAX® pipe sizes. Refer to your local safe handling work practices and guidelines when handling pipes and weights referenced in Tables 2.2, 2.3 and 2.4 for guidance. Alternatively, an excavator can be used with a nylon sling at the pipe mid-point.


The following rubber ring joint procedure is required for the quality assembly of the BlackMAX® and SewerMAX® pipe joint pipes:

1. Clean the pipe socket and spigot grooves, making sure both are free of soil and foreign material.

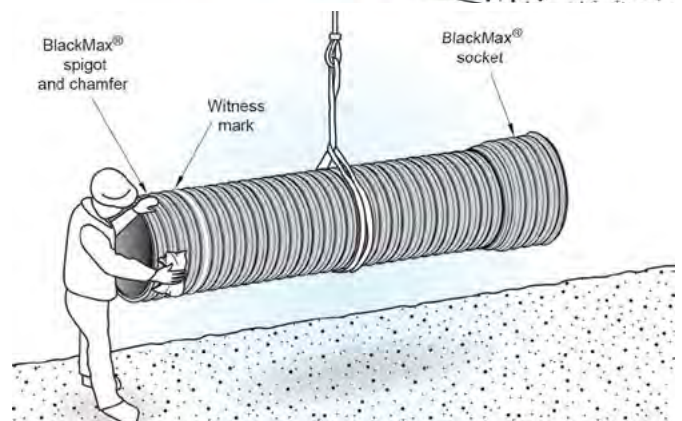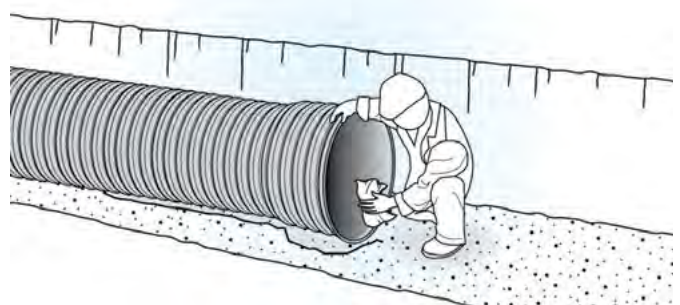




**2.** Clean the rubber ring seal and ensure the ring is free from any soil and foreign matter. Install the rubber ring by stretching it over the spigot in the second trough from the end of the pipe. Ensure the rubber ring sits evenly inside the trough by running your hands and fingers around its full circumference.

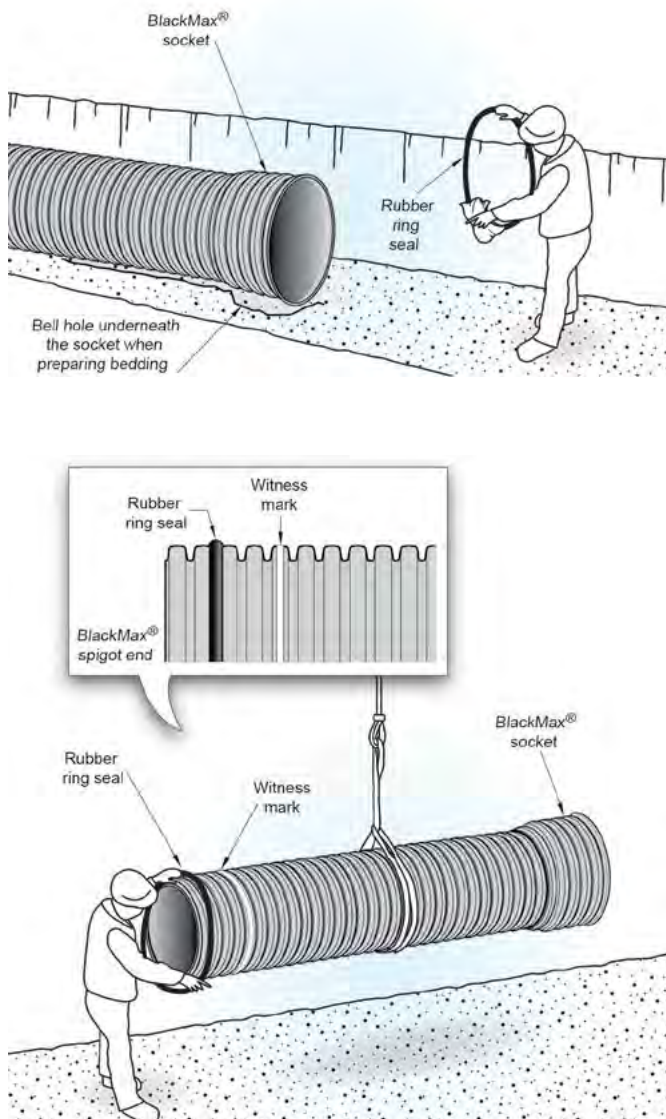


**3.** Although pipes may show some out-of-roundness due to storage loads, this is usually minimal. Where it is present, it is advantageous to orientate the larger pipe diameter in the vertical plane. This will ease the jointing process and helps offset any deflection after backfilling.

**4.** Apply Iplex pipe jointing lubricant liberally to the inside of the socket and lead-in flare. Avoid lubricating the ring itself to ensure it does not pick up dirt while the joint is being

made. (MINERAL OILS OR GREASES MUST NOT BE USED UNDER ANY CIRCUMSTANCES, AS THESE COMPOUNDS WILL CAUSE LONG-TERM DEGRADATION OF THE RUBBER SEAL. IN AN EMERGENCY COMMON SOAP CAN BE USED). Only use pipe lubricants in accordance with the manufacturer's directions.

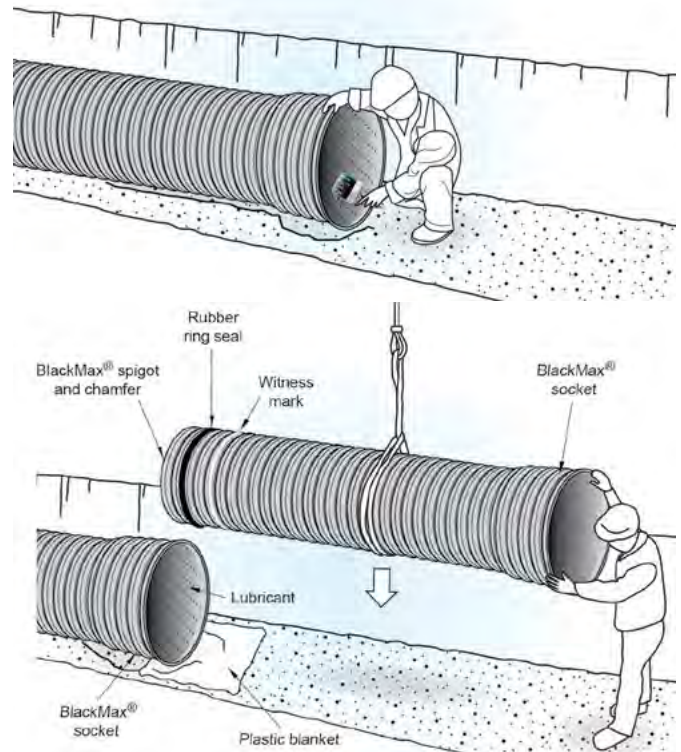


**5.** Insert the leading edge of the spigot into the socket. It is essential that pipes are aligned in a straight line before attempting to make the joint.

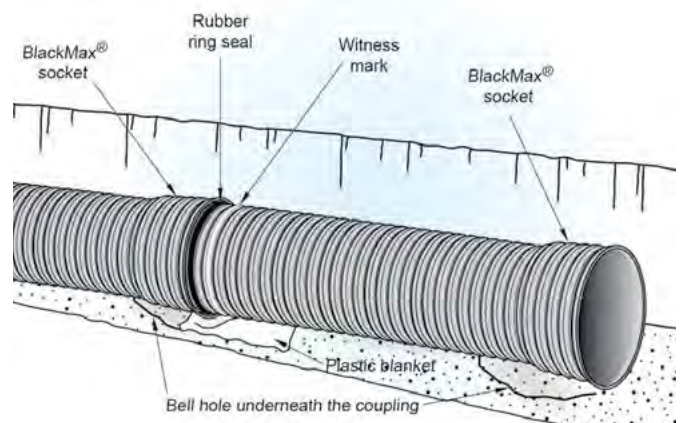


The normal convention is to lay pipes by starting from the down-stream end with the socket facing in the up-stream direction. After laying, pipes must be held in position to line and grade by placing enough embedment material over each pipe before joining the next one.

6. Apply force evenly on a timber-bridging piece protecting the end of the pipe.
7. Push home to the spigot witness mark.

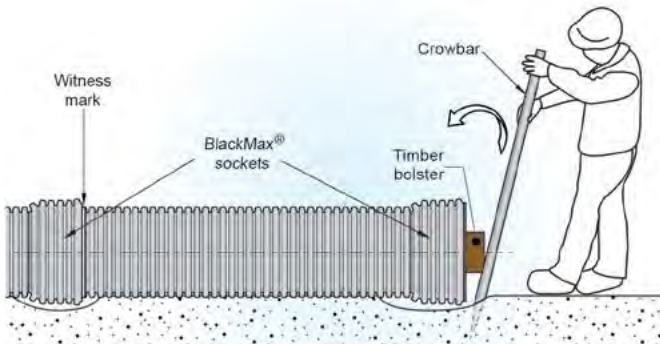

Generally smaller pipes can be pushed home with a crowbar.

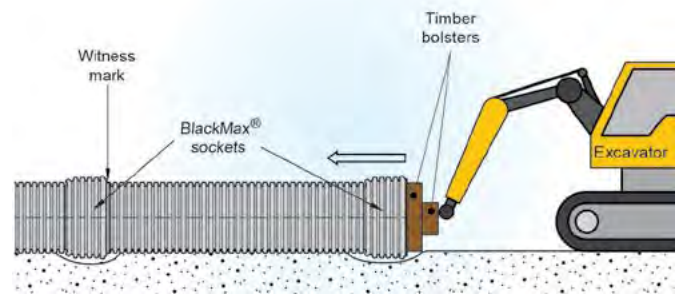

Larger pipes require mechanical force during the jointing procedure.

## 4.7.2.1 PIPE CUTTING

BlackMAX® and SewerMAX® pipes can be cut anywhere along their length as required. Always ensure that safe work practices are observed and wear appropriate PPE, such as impact resistant Type F gloves. The cut must be made in the valley between the corrugations at right angles to the axis of the pipe. No end treatment or chamfer is required. BlackMAX® and SewerMAX® pipes can be safely cut using any saw suitable for cutting timber. This can be a manual or powered saw.

**IMPORTANT SAFETY INFORMATION:** When using saws ensure the pipe is secure and stable from any movement. Both hands must be on the saw, not the pipe, as saws can bounce and lacerate a guiding hand. After cutting the pipe, it is important to place a new witness mark at the end of the spigot at a distance shown in Tables 2.2, 2.3 and 2.4. Then repeat steps 1 to 7.

## 4.8 PIPE SIDE SUPPORT AND OVERLAY

### 4.8.1 EMBEDMENT - HAUNCHING AND SIDE SUPPORT

Generally, material used in the embedment zone should be uniform selected non cohesive soils. Information regarding selection is given in Appendices G and H of AS/NZS 2566.2.

The embedment must be evenly compacted between the pipe and the surrounding native soil given that the complete side support zone extends horizontally beyond the pipe for approximately twice the pipe diameter at pipe depth. Care must be taken not to disturb the pipe alignment when compacting the embedment material.

Where trench shields or boxes are used, special care is necessary to fill any voids resulting from their removal and must be filled with the same compacted embedment material.

If there is a possibility of migration of fines between the embedment and native soil, geotextile fabric must be used at the interface to completely envelope the embedment including the bedding. Refer to Section 4 and Appendix J of AS/NZS 2566.2 for further information.

Attention to the quality and degree of compaction of the embedment material placed on each side of a BlackMAX® or SewerMAX® pipeline is fundamental to its structural integrity. Table 4.3 shows the default values given in AS/NZS 2566.2 for the appropriate degree of relative compaction of the embedment bedding and side support zone.



TABLE 4.3 Minimum relative compactions (AS/NZS2566.2)

Soil Types	Test Method	Trafficable areas		Non trafficable areas	
		Embedment material %	Trench / embankment fill material %	Embedment material %	Trench / embankment fill material %
Cohesionless	Density Index	70	70	60	Compaction to suit site requirements
Cohesion	Standard Dry Density Ratio, or Hilt Density Ratio	95	95	90	

## 4.8.2 OVERLAY

The embedment material must extend to a cover height of 150mm (DN225 to DN750) and 200mm (DN900 to DN1200) above the pipe to provide protection from the placement of overburden material. For minimum cover heights above pipe during the operation of compaction equipment, see Table 3.8.

## 4.9 TRENCH & EMBANKMENT FILL

Backfilling the pipeline may involve the use of the excavated material. Ensure the thickness of the overlay is adequate. Care must be taken to avoid the inclusion of large stones, rocks or hard clumps that may cause point loading on the pipeline.

Overburden compaction with large vibrating power compactors must be avoided until there is adequate height of fill over the pipe (Refer to Section 3.2.4). This will vary depending on the capacity of the machine but generally at least 0.5 metres is desirable.

### 4.9.1 MONITORING DIAMETRAL DEFLECTIONS

Once the backfilling operation is complete, the adequacy of the embedment and compaction and the use of correct


backfilling techniques may be assessed by measuring the vertical deflection within the pipe. The deflection check described in Section 5.2 is useful in the initial construction period as this provides an opportunity for bench-marking appropriate compaction procedures.

Maximum allowable initial deflection values are given in AS/NZS 2566.2 for differing time intervals after completion of the fill operation e.g. the maximum allowable deflection at 24 hours is 3.5 % and at 30 days 5.0 %. Refer to Tables 5.3 and 5.4.


*Note: Compaction of the embedment in the pipe embedment zone may increase the vertical pipe diameter and decrease the horizontal pipe diameter. This is not detrimental, providing the magnitude of the horizontal diametrical deformation does not exceed the prescribed allowable deflections. See Section 5.2 for test procedure.*

## 4.10 BORE CASING

When BlackMAX® or SewerMAX® pipes are installed in casings, skids or approved spacers must be used to prevent damage to the pipe and socket joints during installation. They must properly position the pipe in the casing. Figure 4.5 shows a typical arrangement of spacers assembled on SewerMAX® pipes ready for installation.

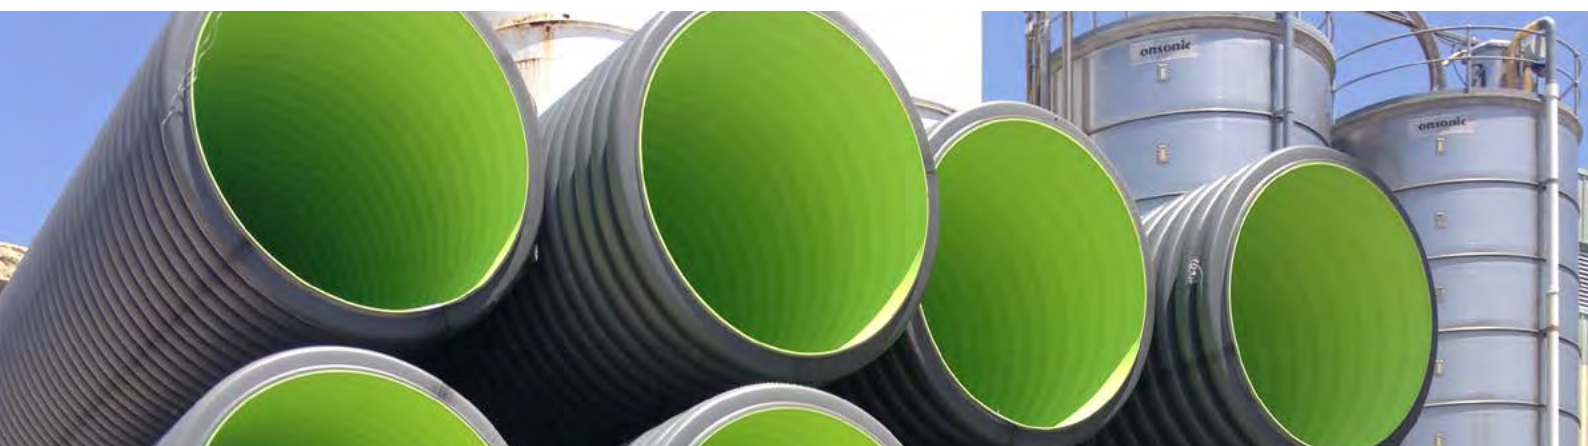

**FIGURE 4.5 Approved Plastic Spacer Arrangement for SewerMAX® pipes**

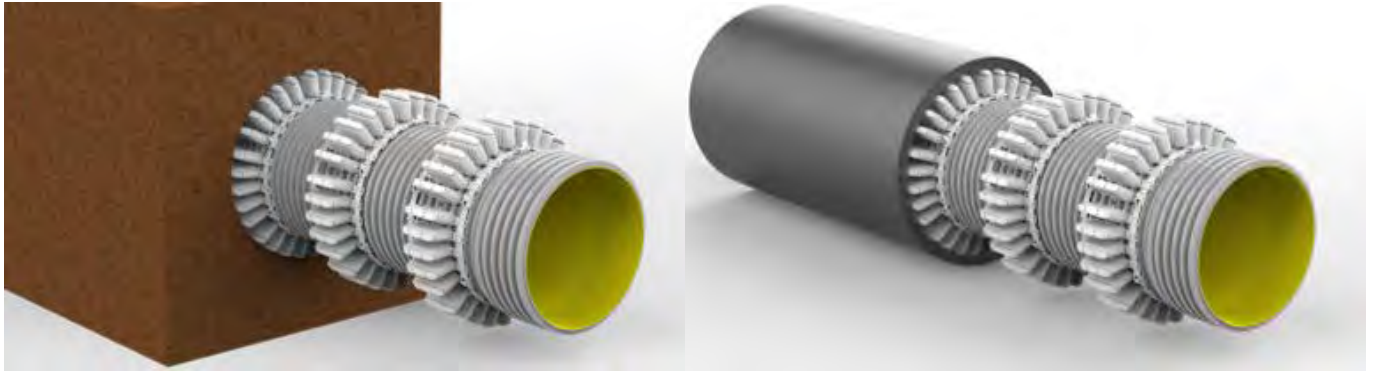

Spacers must be assembled in accordance with the manufacturer's recommendations. Skids must extend for the full length of the pipe, except for the socket and spigot (up to the witness mark). Spacers or skids must provide enough height to permit clearance between the pipe socket and casing wall. Casings are normally sized to provide an inside diameter which is at least 50mm greater than the maximum outside diameter of the pipe socket, spacers or skids, whichever is the greatest.

Skids or spacers must be fastened securely to the pipe. Use approved pipe lubricant between the skids and casing for ease of installation. Upon completion of pipe insertion, grouting of the void in accordance with design requirements can be accomplished.

For further information with lengths and maximum loading contact Iplex.

## 4.10.1 GROUTING

Where it is necessary to pressure grout an annulus between the pipe and enveloping conduit, it is important to ensure that the grout is introduced into the annulus evenly. The pipe must be properly restrained to resist flotation, deformation and bending. In addition, the hydrostatic grout pressure must not exceed 70kPa to ensure there is an adequate factor of safety against buckling instability. If necessary, the effect of grout pressures can be nearly halved by filling the pipeline with water. Alternatively, it may be possible to stage the grouting process in two or three lifts, allowing the grout to solidify in the annulus below the spring-line before the top section is filled. This method is illustrated in Appendix K of AS/NZS 2566.2.

## 4.11 JOINTING TO RIGID STRUCTURES


### 4.11.1 RELATIVE SETTLEMENT

Where BlackMAX® or SewerMAX® pipes are connected to concrete structures there is unlikely to be any need for MH connectors or rocker pipes due to the high straining (ductile) capability of polypropylene. This will allow the pipes to accommodate differential settlement within specified limits without damage.


### 4.11.2 PIPE TO CONCRETE INTERFACE

BlackMAX® and SewerMAX® pipes can be directly embedded into concrete maintenance holes, pits, or other concrete structure. If a water-tight seal is required, for example in gravity sewerage installations, an approved hydrophilic rubber compound in strip form must be used. Figure 4.7.

**FIGURE 4.6** Typical connection to a concrete stormwater pit with BlackMAX® pipe.

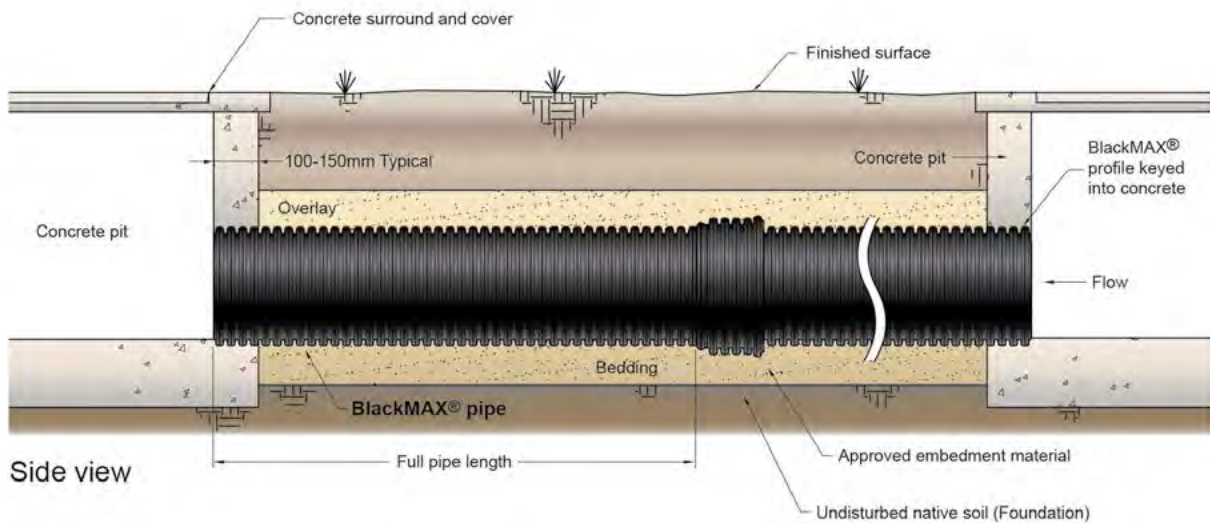

**FIGURE 4.7** Typical connection to a concrete sewer maintenance hole MH with SewerMAX® pipe

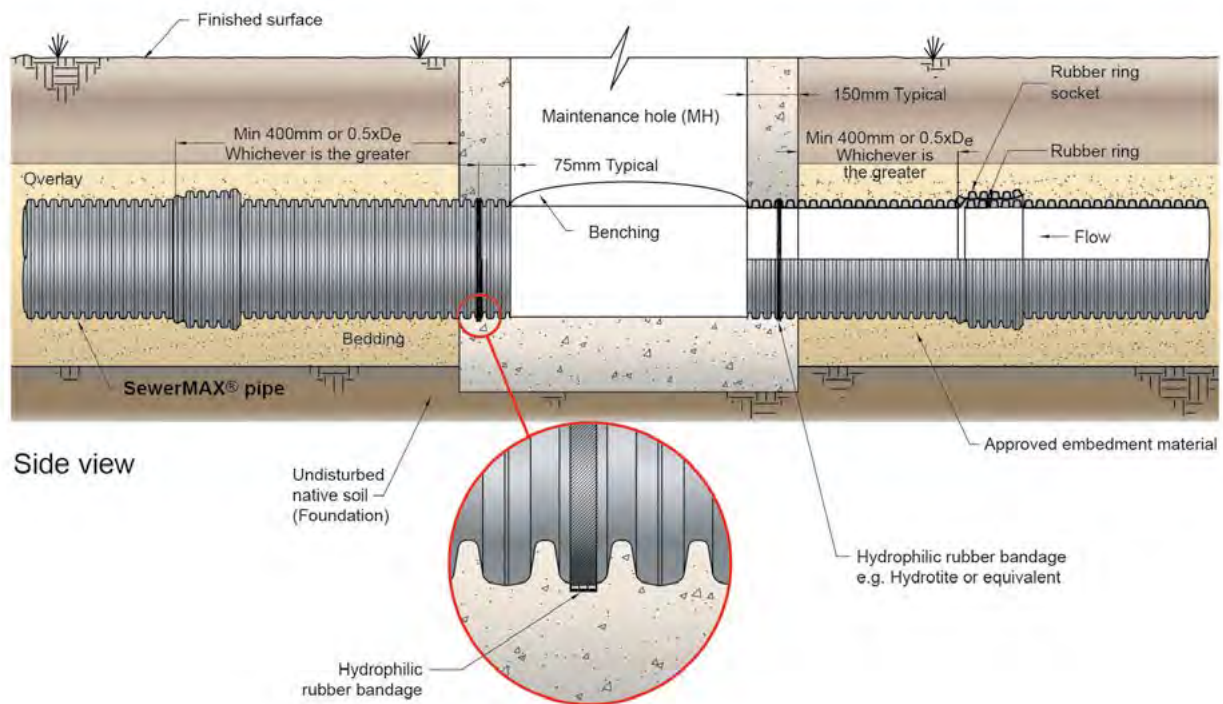

The following procedure outlines the steps to be followed when using the Hydrotite® Water Seal with SewerMAX® pipes when connecting to concrete maintenance holes.

1. Prior to fixing the Hydrotite® seal to the SewerMAX® pipe, ensure the contact surface is free of dust, grime, or any foreign matter.
2. Select the corrugation nominated in Table 4.4 which

will give approximately 75mm of cover (min 50mm) to the Hydrotite® seal when encased in the concrete wall. Figure 4.7.

3. Lightly roughen the pipe surface where the Hydrotite® is to be affixed with some fine sandpaper.
4. Remove the protective tape from the self-adhesive backing on the Hydrotite® and fix the Hydrotite® around the



circumference of the pre prepared corrugation on the pipe. Start with the centre of the pipe and work around until you are approximately  $\frac{3}{4}$  around the corrugation.

**5.** Apply a thin film of Loctite adhesive to each end of the Hydrotite® and stretching the two ends, butt them together then hold for approximately 30 seconds until adhesive sets. Lower the Hydrotite® to the surface of the corrugation.

**6.** With the heel of the hand press the Hydrotite® firmly onto the surface of the pipe corrugation.

**7.** Place the pipe with the assembled Hydrotite® seal into the structure ready for concrete to be placed around the joint. Before concrete is poured it must be positioned in the pipe to concrete interface zone at a minimum distance of 75mm inside the formwork to ensure all potential water paths are intercepted.

*Note: Standard work practices must be observed when using adhesives or similar substances.*

**FIGURE 4.4**

Pipe size (DN)	Corrugation No.	Minimum Wall thicknesses of concrete structures
225	3	150mm
300	3	150mm
375	2	150mm
450	2	150mm
525	2	150mm
600	2	200mm


## 4.11.3 CONNECTIONS FOR INCOMING SIDELINES

### 4.11.3.1 SEWERMAX® JUNCTIONS

A standard range of SewerMAX® junctions is available for lateral side connections. Junctions are prefabricated with socket ends suitable for rubber ring jointing with SewerMAX® pipes. The branch-off takes are normally at 45° to the main body with sockets suitable for connection with SewerMAX® or PVC DWV pipes (Refer to Section 2.5).


The method for connecting to existing sewer mains is shown in Figure 4.8 and the 'Sewerage Code of Australia WSA 02'.

**FIGURE 4.8 Post installation of Sewer Junction**

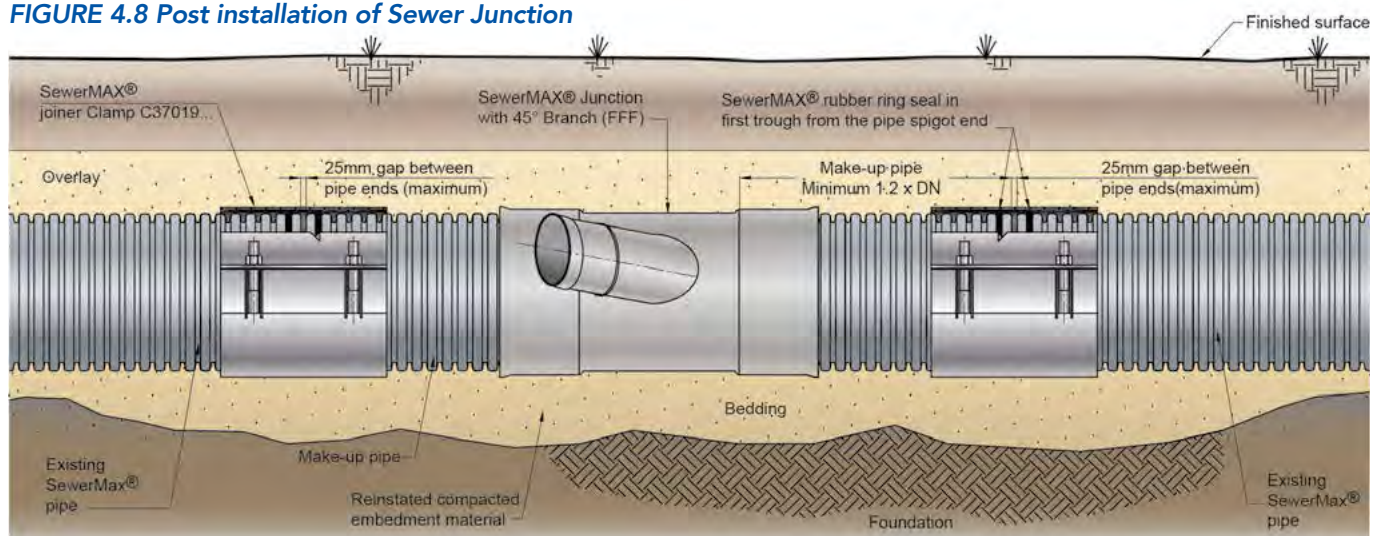

Post installation of SewerMAX® Junction (FFF) with SewerMAX® Joiner Clamps

### 4.11.3.2 STORMWATER SADDLES

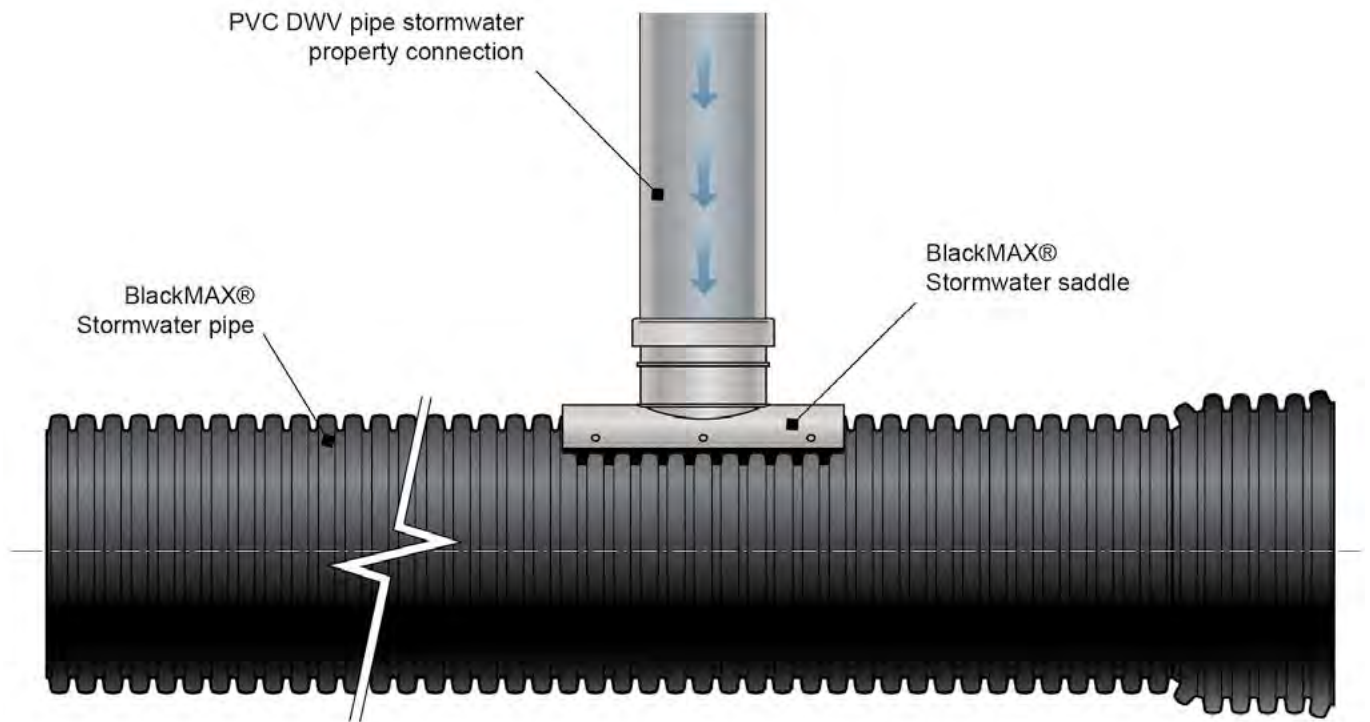

BlackMAX® stormwater saddles with dn100 and dn150 DWV PVC branch off-takes are available for stormwater drainage inflow connections. These saddles include a solid wall ribbed gasket, which provides a precision fit with BlackMAX® pipes. The procedure for installing the stormwater saddle is as follows:

1. Place the saddle at the required position on the pipe. (Note, the profile gasket will guide the saddle onto the pipe and ensure the saddle sits correctly).
2. Using the saddle as a template, inscribe a circle on the pipe with a marker corresponding with the off-take diameter.
3. Remove the saddle and position the pilot drill of the hole-saw at the centre of the circle and cut the hole.
4. If specified, apply a bead of butyl mastic on the underside of the saddle.
5. Place the saddle in position and secure with the fasteners supplied.

## 4.12 REPAIR METHODS

The condition and size of the damaged area is important to determine the type of repair needed.

### 4.12.1 FOR MINOR REPAIRS

If the damage is minor or small in the pipe wall, then it may be repaired by using a SewerMAX® Repair clamp (Refer to Section 2.5.2 Product Codes C37018...).

The repair clamp can be wrapped around the pipe at the point of damage with minimal disturbance to the pipeline. The gasket is preformed to match the external pipe wall profile and provides a watertight seal. The pipe surface profiles must be clean and free of dirt and mud.

The procedure for installation is as follows:

1. Loosen all nuts on the clamp, but do not remove from the studs. Slide the locking plate towards the nuts and open the clamp.
2. Position the clamp centrally over the damaged area ensuring that no foreign matter will be trapped between the

mating surfaces. Special attention must be given to cleaning the troughs in the pipe profile.

3. Wrap the clamp around the pipe and bring both ends together by using the locking washer plate.
4. Lock into place and squeeze the lugs together while tightening the nuts by hand. Prior to tightening the nuts with a wrench, ensure the damaged area is correctly centred under the clamp.
5. Tighten the nuts to the required torque as indicated by the installation instructions for the clamp.
6. Re-establish the specified embedment material in the embedment zone and backfill to the required standard and compaction.

## 4.12.2 MAJOR REPAIRS

If damage is severe, then the damaged pipe wall section must be removed and replaced with a new pipe section of the same length. The pipe ends can be joined using SewerMAX® Joining Clamps (Refer to section 2.5.2 Product


Codes C37019... and Figure 4.9). The Joining clamp is comprised of a stainless-steel shell with a flat rubber sleeve and utilises two SewerMAX® sealing rings to make the joint.

The installation procedure is as follows:

1. Locate and expose the whole length of the damaged pipe.
2. Cut and remove the damaged pipe section. Cut the pipes in the trough. of the pipe at both ends, using a hand saw or circular disc.
3. Clean and trim the intact pipe ends, leaving these ends smooth and square.
4. Cut a length of replacement pipe of the same distance between the prepared ends less the length of a single profile.
5. Fit the SewerMAX® rubber rings on each pipe end. These rings must be placed in the first trough from each pipe end.
6. Fit the clamps symmetrically over each joint and tighten the bolts to the torque as labeled.



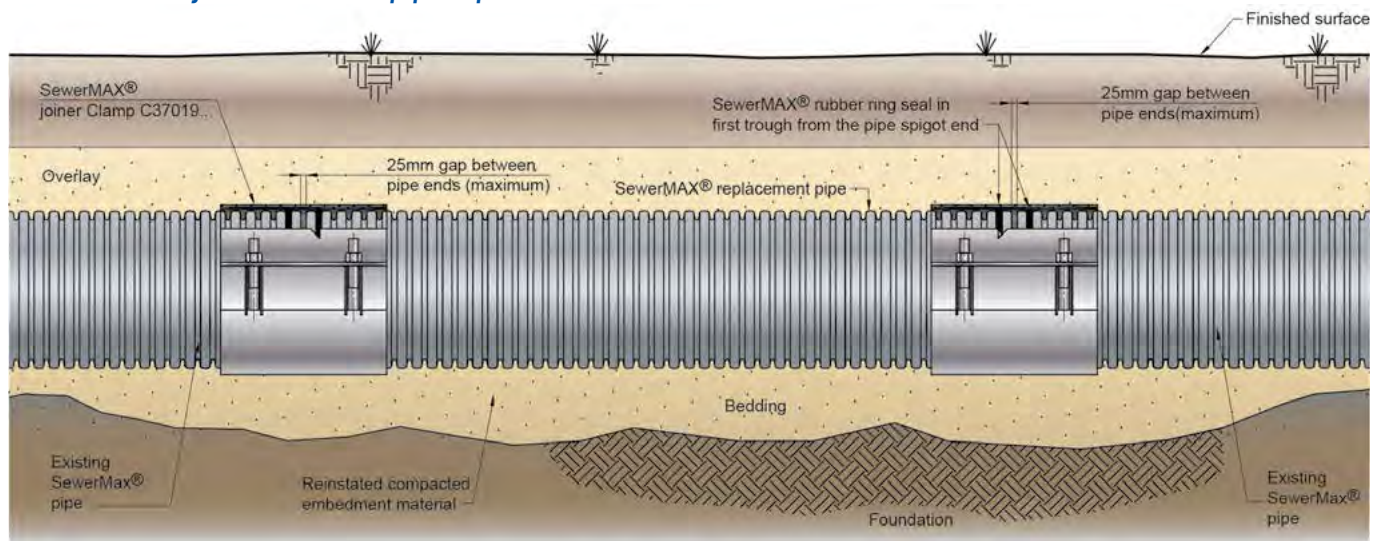

**FIGURE 4.9 Major SewerMAX® pipe repair**

### SewerMAX® pipe repair with SewerMAX® Joiner clamps

## 5.0 FIELD ACCEPTANCE TESTING

Field-testing is used for identifying installation problems such as damaged pipes, poor embedment placement and/or compaction and jointing deficiencies. Where a fully water-tight system is required as in the case for sewers, a properly structured leakage testing program is usually required to obtain acceptance. However, this is not usually needed in the case of underground stormwater drains. A diametrical deflection check as the principle indicator can easily assess the structural integrity of a SewerMAX® pipe, soil system.

## 5.1 LEAKAGE TESTING

A leakage check on a buried sewer pipeline can be completed using any one of the following methods:

- Hydrostatic Pressure Test
- Vacuum Test
- Low Pressure Air Test
- Infiltration Test

The air and vacuum tests are usually more convenient as they do not require water. An infiltration observation or test measurement is a further option where a pipeline is installed well below the water table.

### 5.1.1 HYDROSTATIC (EX-FILTRATION) TESTING

The sewer pipeline must be filled with water to a height of not less than 1m above the natural ground level at the highest point of the test length but not exceeding 6m at the lowest point of the test length. A minimum of 2 hours must elapse to allow temperatures to stabilise. Then during a minimum time span of 30 minutes any fall in water level in the test vessel must not exceed the hourly allowance amount shown in Table 5.1.

If this is not achieved the pipeline must be carefully examined visually for leaks and any defects repaired. The pipeline must then be retested.



**TABLE 5.1 Hydrostatic pressure test leakage limits**

DN	Make- up allowance* (Litres /m/hour)
225	0.11
300	0.14
375	0.18
450	0.21
525	0.25
600	0.28

\*Based on the allowance of 0.5 litres per hour per mm diameter per km (Reference AS/NZS2566.2)

## 5.1.2 LOW PRESSURE AIR (EXFILTRATION) TESTING

The test length of a sewer pipeline is generally restricted to lengths between maintenance holes (the most convenient places for fixing temporary bulkheads).

The procedure for low-pressure air testing of larger diameter pipelines is potentially hazardous because of the large forces exerted during testing. Temporary bulkheads must resist these forces and the serious safety consequences should there be an accidental bulkhead blow-out.

The procedure is as follows:

1. Pump in air slowly until a pressure of 28 kPa above any external ground water pressure is reached.  
(Do not exceed 50kPa gauge in any case)
2. Maintain the pressure for at least 3 minutes
3. If no leaks are detected during this phase, shut off the air supply.

The low-pressure air test for a sewer pipeline is satisfactory if the test pressure does not drop more than 7kPa within the time shown in Table 5.2 from air supply shut-off. Should there be no discernible pressure loss after one hour has elapsed, the test can be considered satisfactory and terminated.

If the pipeline fails the air test, re-pressurise the sewer pipeline to 28kPa and check for leaks. This may be assisted by using leak detecting equipment. Leaks in shallow installations with joints exposed may be detected by pouring a concentrated solution of soft soap and water over joints and fittings. Repair and then repeat the test.

**TABLE 5.2 Minimum allowable times for test for 7 kPa pressure drop**

DN	Minimum allowable time* (minutes) for test length shown		
	50m	100m	150m
225	4	5	8
300	6	9	14
375	7	14	22
450	10	21	31
525	14	28	42
600	18	37	55

Note: Minimum available time may be halved where a pressure drops of 3 kPa is used.

\*Gravity Sewerage Code of Australia Part 2 Construction. Table 21.3 'Vacuum Testing Acceptance Times.

### 5.1.3 INFILTRATION TESTING

Where a freestanding water table exists at a level of at least 1.5m above the sewer pipeline and 150mm above any lateral connections, the absence of infiltration can remove the need for either of the previous pressure tests. In all cases where infiltration is observed, the source must be investigated and the leak plugged. Where the size of the catchment and number of side connections precludes this approach then the inflow must be measured over a 24-hour period and the principle informed for determination of the acceptable allowable inflow. This should not exceed 5 litres/mm diameter/km length/day.

## 5.2 STRUCTURAL ASSESSMENT

### 5.2.1 DEFLECTION TESTING

Deflection measurements are often used as additional quality control to indirectly assess the relative compactions achieved during installation and whether the required structural performance has been achieved. A visual line-of-site inspection will usually indicate any abnormal deflections, which must be investigated. An acceptance test requiring a pull-through Go or No-go proving tool may be specified to ensure that the actual short-term vertical deflections do not exceed the allowable vertical deflection given in Tables 5.3 and 5.4.

Where required, a prover with an external diameter equivalent to the allowable deflected internal diameter, less a further tolerance of 2.5 millimetres, must be pulled through the pipeline by hand or hand operated winch.

### 5.2.2 PROVER DESIGN

Suitable types of provers are described in AS/NZS 2566.2. A lightweight vaned type with a minimum of eight vanes between 1.0 and 1.3 pipe diameters in length may be used. The acceptable prover diameter must be determined after considering the effect of different time periods after completion of construction. These are given in Tables 5.3 and 5.4.

Where a prover cannot pass along the test length, the cause of the obstruction must be ascertained by remote TV investigation and appropriate remedial construction undertaken. This may require the exposure of the affected section of the pipeline and the re-compaction of the side support material without removing pipes. That is SewerMAX® and SewerMAX+® pipes are not usually damaged by excessive deflections and a visual inspection should be enough to determine if any pipe replacement is required.





**TABLE 5.3 Maximum allowable SewerMAX® prover diameters for nominated times after completion of the backfill**

		24 hours	3 days	7 days	14 days	30 days	3 months	1 year
Adjustment Factor		0.7	0.75	0.85	0.95	1	1.1	1.2
Deflection (%)		3.5	3.8	4.3	4.8	5.00	5.5	6.0
DN		Pipe ID (mm)						
225	225	215	214	213	212	211	210	209
300	300	286	285	284	282	282	280	279
375	373	357	357	355	353	352	350	348
450	447	429	428	426	423	422	420	418
525	522	501	500	497	495	493	491	488
600	596	573	571	568	565	564	561	558

**TABLE 5.4 Maximum allowable SewerMAX+® prover diameters for nominated times after completion of the backfill**

		24 hours	3 days	7 days	14 days	30 days	3 months	1 year
Adjustment Factor		0.7	0.75	0.85	0.95	1	1.1	1.2
Deflection (%)		3.5	3.8	4.3	4.8	5.00	5.5	6.0
DN		Pipe ID (mm)						
225	224	214	213	212	211	210	209	208
300	297	284	283	282	280	280	278	277
375	370	355	353	352	350	349	347	345
450	433	415	414	412	410	409	407	405
525	516	495	494	491	489	488	485	483

Note: DN600 SewerMAX+® is currently in development













FOR ALL ENQUIRIES AND ORDERS CONTACT IPLEX PIPELINES

[WWW.IPLEX.COM.AU](http://WWW.IPLEX.COM.AU)

Plumbing and Irrigation **1300 0 IPLEX**

Civil **13 10 86**

Email [info@iplexpipelines.com.au](mailto:info@iplexpipelines.com.au)

**VERSION 2 – SEP 2023**