

DR BRASS DUAL APPROVED BALL VALVE

appFLO

ALSO AVAILABLE

- EXTENDED LEVER HANDLES
- MALE/FEMALE THREADS
- CONVERSION KITS FROM STANDARD TO EXTENDED LEVER
- LOCKABLE HANDLES




Materials	
PART	MATERIAL
Body	CW511L
Bonnet	CW511L
Seats	PTFE
Valve Ball	CW511L (Chromium Plated)
Stem	CW511L
O-ring	EPDM
Handle	SS304 (Plastic Coated)
Nut	SS304

Specifications	
Thread	ISO 7.1
Max Working Temperature	150°C (Gas = 60°C)
Cold Working Pressure	2500kPa

Applications:

Potable water, gas services, some oils, chemicals and hydrocarbons.

DR Brass Ball Valve						
AAP CODE	IMPERIAL SIZE	L	H	W	A	APPROX. KG/PC
VBBD08	1/4	47	39	81	13	0.12
VBBD10	3/8	48	39	81	13	0.13
VBBD15	1/2	60	50	91	17	0.20
VBBD20	3/4	66	52	91	18	0.28
VBBD25	1	80	59	126	22	0.47
VBBD32	1 1/4	93	65	126	24	0.64
VBBD40	1 1/2	100	76	141	24	0.98
VBBD50	2	123	86	141	28	1.61
VBBD65	2 1/2	146	115	201	33	2.95
VBBD80	3	167	124	281	36	4.34

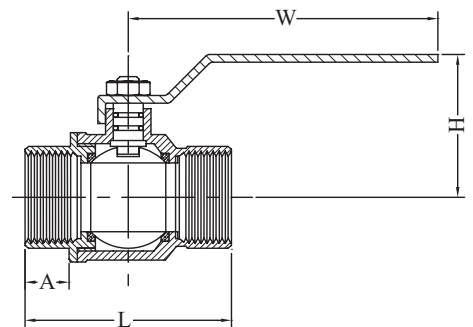

WLF