

FEKA VS

SUBMERSIBLE PUMPS FOR WASTEWATER AND RAINWATER





TECHNICAL DATA

Flow rate: 3 m³h to 39 m³h

Head: 17 m

Pumped liquid: sewage and general wastewater, non-aggressive

Free passage: 50 mm

Liquid temperature range:

0°C to +35°C for domestic use

0°C to +50°C for other uses

Outlet Threaded: threaded 2" GAS

Delivery direction: horizontal

Impeller: stainless steel vortex

Protection degree: IP 68

Thermal classification of motor insulation: F

Power cable: H07RN-F

Possible installation types: fixed or portable in vertical position

Maximum immersion: 7 metres

Submersible pumps designed for domestic/residential and commercial applications, made entirely from stainless steel and suited to lifting solids-laden and waste water containing solid matter measuring up to 50 mm in diameter. With their hydraulics fine-tuned for purpose, we have achieved an overall increase in efficiency, resulting in reduced consumption for the same performance and reliability.

CONSTRUCTION FEATURES OF THE PUMP


The vortex impeller is made from stainless steel; there is a double mechanical seal with an oil chamber (non-toxic oil) between the two seals, which are made from carbon/alumina on the motor side and silicon carbide/silicon carbide on the pump side. The seal holder cover, motor housing, pump casing, cap and handle are all made from stainless steel. The handle is covered in insulating rubber. Built to Italian standards CEI 2-3 and CEI 61-69 (EN 60335-2-41). The maximum ambient temperature for operating FEKA VS is +40°C with the motor out of the fluid.

CONSTRUCTION FEATURES OF THE MOTOR

The asynchronous dry motor is watertight and cooled by the fluid being pumped. The rotor is mounted on lifetime-greased oversized ball bearings selected for quiet running and longevity. The motor shaft is made from AISI 316 stainless steel. Thermal overcurrent protection comes as standard on the single-phase version.

MATERIALS


N°	PARTS	MATERIALS
1	PUMP HOUSING	STAINLESS STEEL AISI 304
2	IMPELLER	STAINLESS STEEL AISI 304
3	SHAFT SEAL DISC	STAINLESS STEEL AISI 304
4	MOTOR CONNECTION FLANGE	STAINLESS STEEL AISI 304
5	LOWER BEARING SUPPORT	ALUMINUM
6	DOUBLE MECHANICAL SEAL	PUMP SIDE SIC / SIC
		MOTOR SIDE CARBON / ALUMINA
7	MOTOR CASE	STAINLESS STEEL AISI 304
8	MOTOR SHAFT	PUMP SIDE STAINLESS STEEL AISI 316
		MOTOR SIDE STEEL C10
9	UPPER BEARING SUPPORT	ALUMINUM
10	COVER CONNECTION	STAINLESS STEEL AISI 304
11	HANDLE	STAINLESS STEEL AND INSULATING RUBBER
12	SUPPLY CABLE	H07RN-F
13	FLOAT SWITCH CABLE	H07RN-F
14	O-RINGS	NBR
15	CABLE GLAND	NICHEL-PLATED BRASS

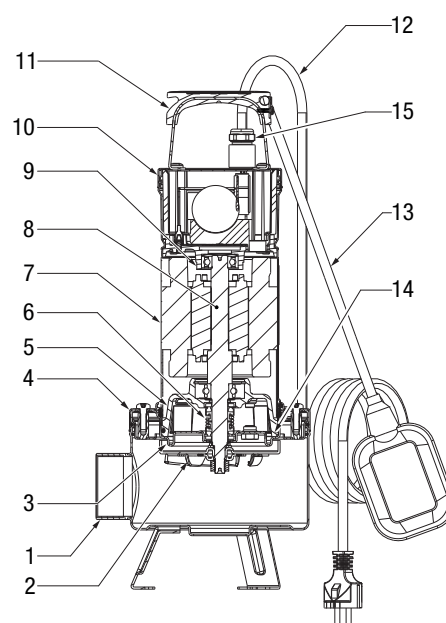

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


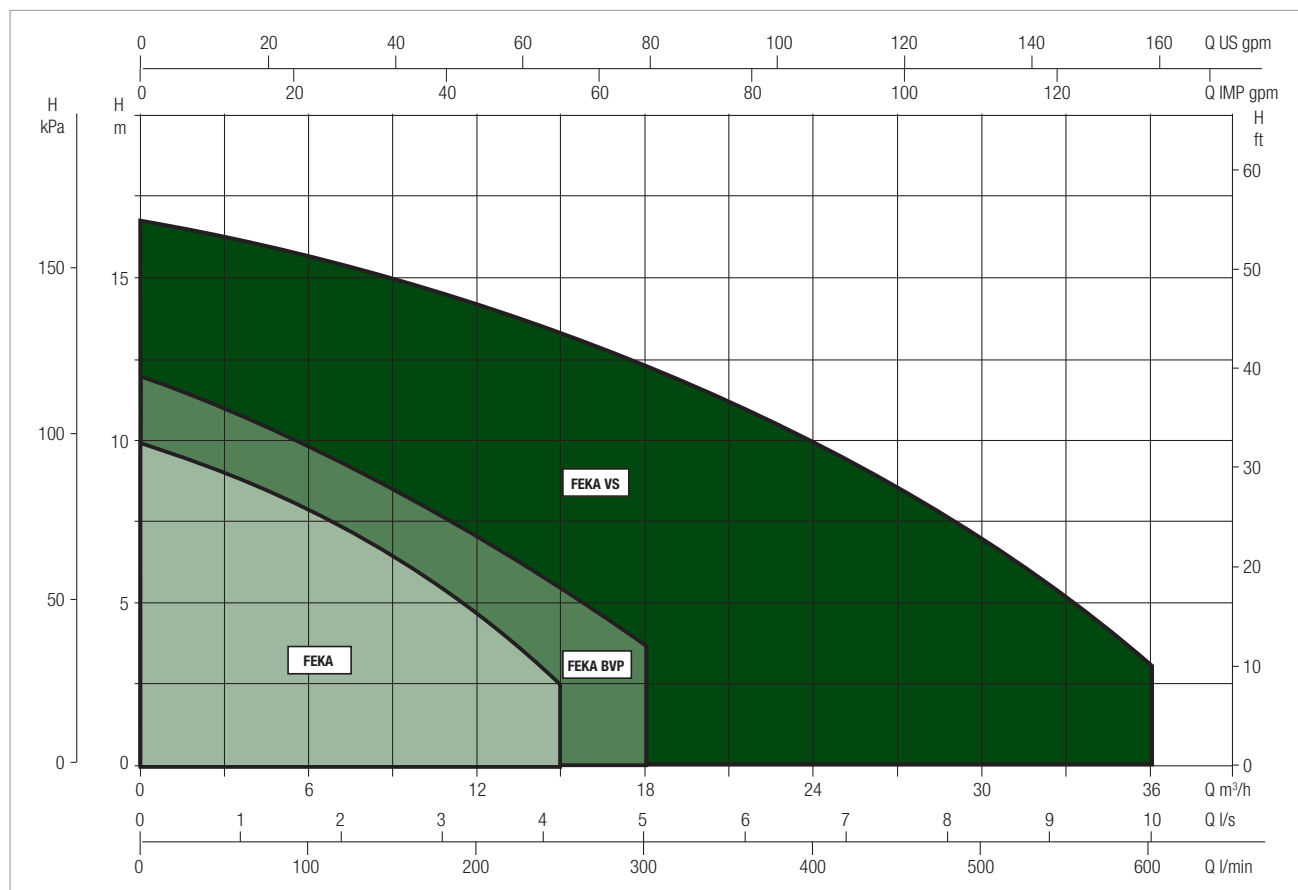


SELECTION TABLE - FEKA VS

MODEL	Q=m ³ /h	0	3	6	9	12	15	18	24	30	36
	Q=l/min	0	50	100	150	200	250	300	400	500	600
FEKA VS 550	H (m)	7,8	6,9	6,2	5,6	4,1	3,2	1,8			
FEKA VS 750		9,6	9,2	8,5	7,6	6,7	5,6	4,3	1,9		
FEKA VS 900		11,8	11,3	10,5	9,8	9	8	6,8	4,1		
FEKA VS 1100		14	13,4	12,8	12	11,2	10,1	9	6,7	4	
FEKA VS 1500		17	16	15,4	15,1	14,5	13,3	12,4	10,43	6,8	3,1

FEKA VS - SUBMERSIBLE PUMPS FOR WASTEWATER AND RAINWATER

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41) - from 0°C to +50°C for the other uses.

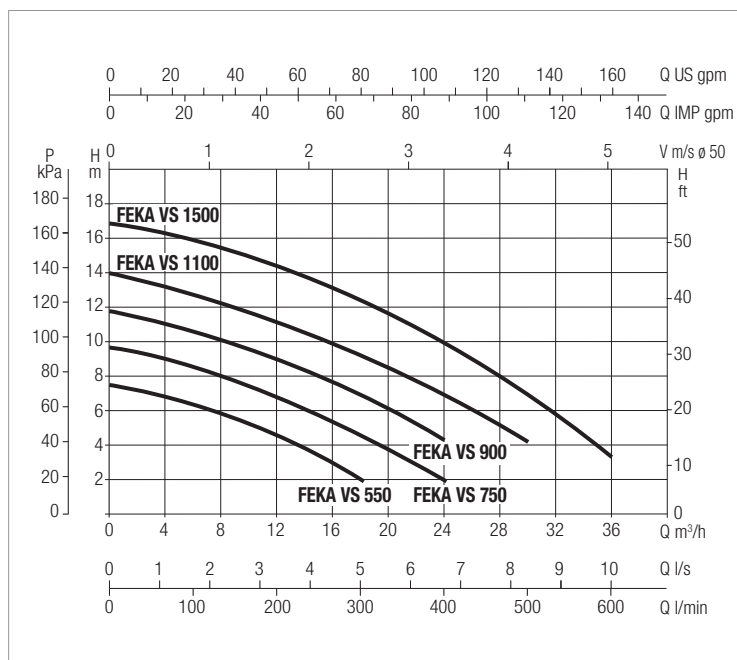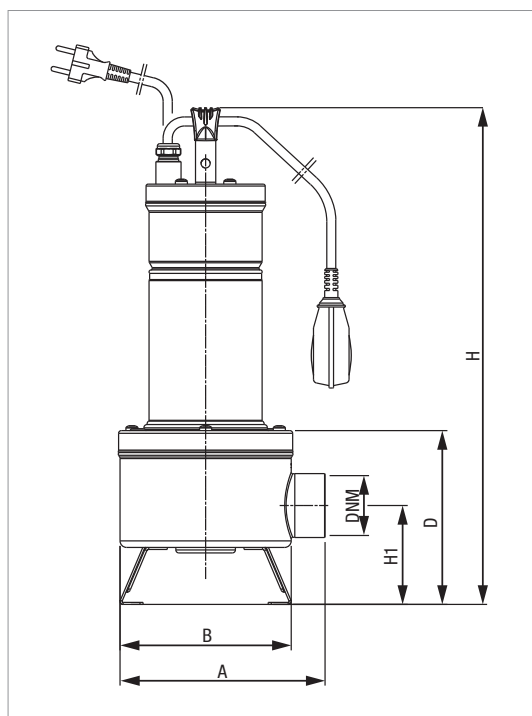

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.


MODEL	ELECTRICAL DATA				
	POWER INPUT 50 Hz	P1 MAX kW	P2 NOMINAL		In A
			kW	HP	
FEKA VS 550 A	1X220 - 240V~	0,9	0,55	0,75	4,1
FEKA VS 550	1X220 - 240V~	0,9	0,55	0,75	4,1
FEKA VS 550	3X400V~	0,9	0,55	0,75	1,8
FEKA VS 750 A	1X220 - 240V~	1,1	0,7	0,95	4,8
FEKA VS 750	1X220 - 240V~	1,1	0,7	0,95	4,8
FEKA VS 750	3X400V~	1,1	0,7	0,95	2
FEKA VS 900 A	1X220 - 240V~	1,35	0,9	1,22	6,3
FEKA VS 900	1X220 - 240V~	1,35	0,9	1,22	6,3
FEKA VS 900	3X400V~	1,35	0,9	1,22	2,6
FEKA VS 1100 A	1X220 - 240V~	1,6	1,1	1,5	7,3
FEKA VS 1100	1X220 - 240V~	1,6	1,1	1,5	7,3
FEKA VS 1100	3X400V~	1,6	1,1	1,5	2,9
FEKA VS 1500 A	1X220 - 240V~	2	1,5	2	9,1
FEKA VS 1500	1X220 - 240V~	2	1,5	2	9,1
FEKA VS 1500	3X400V~	2	1,5	2	3,8

MODEL	A	B	D	H	H1	PACKING DIMENSIONS			WEIGHT Kg
						LA	LB	H	
FEKA VS 550	203	170	172	475	98	560	235	215	12,5
FEKA VS 750	203	170	172	475	98	560	235	215	12,5
FEKA VS 900	203	170	172	515	98	620	235	215	15,6
FEKA VS 1100	203	170	172	515	98	620	235	215	15,6
FEKA VS 1500	203	170	172	535	98	620	235	215	16,7


FEKA VS - SUBMERSIBLE PUMPS FOR WASTEWATER AND RAINWATER

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41) - from 0°C to +50°C for the other uses.

FIXED INSTALLATION

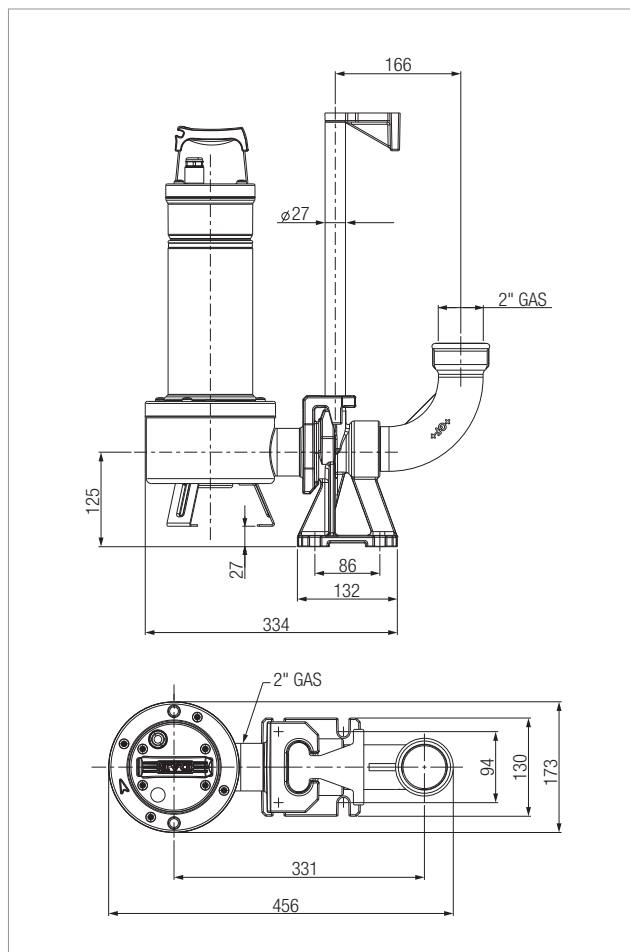

PORTABLE INSTALLATION

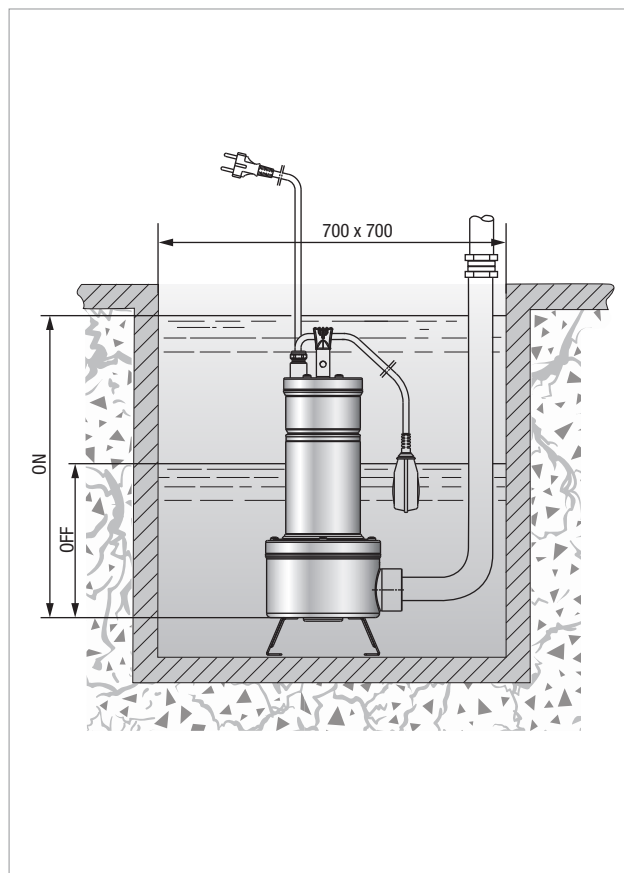

FEKA VS 550-750	ON 425 mm	OFF 360 mm
FEKA VS 900-1100	ON 480 mm	OFF 400 mm
FEKA VS 1500	ON 480 mm	OFF 400 mm



Available from your local DAB distributor:

WHITE INTERNATIONAL PTY LTD

60 Ashford Avenue
Milperra NSW 2214
Phone: 02 9783 6000
Customer Service: 1300 783 601
Email Sales: pumpsales@whiteint.com.au
www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue
East Tamaki, Auckland 2013
Phone: 09 579 9777
Customer Service: 0800 509 506
Email Sales: sales@whiteint.co.nz
www.whiteint.co.nz



**Please always refer to our website for further
technical information & new product innovations**

© 2025 Copyright White International Pty Ltd

TM ® - WARNING: Please be aware that various brands & products depicted within this document are subject to trademark, patent or design registrations. Infringement of any intellectual property contained within this document without express written authority by the appropriate intellectual property holder may result in further legal action to be taken. For any queries regarding use of the contained information please feel free to contact White International Pty Ltd.