

The connection  
you can trust  
for joining  
Rural B pipe

The Philmac Rural range  
of Australian made  
compression fittings  
provides the perfect  
connection for Australian  
Rural B Class poly pipe.

Installation is easy with  
a simple to use insert  
assembly, and the fitting  
allows for straight  
forward disconnection  
and reconnection.



**Philmac Pty Ltd**

ABN: 17 007 873 047

47-59 Deeds Road  
North Plympton, South Australia  
AUSTRALIA 5037

**CUSTOMER SERVICE**

Ph: 1800 755 899  
philmac.com.au



The connection you can trust.

PHI0398-09/18

RURAL COMPRESSION FITTINGS

You can't beat  
**THE ORIGINAL**

Water is precious. Put your trust  
in the original.



The connection you can trust.

**Introduction**

Importantly, the Philmac Rural compression fitting range has been manufactured from high performance advanced thermoplastic materials so it is resistant to corrosion and has the strength and durability for many years of service.

Backed by a 20 year warranty, the Philmac Rural compression fitting is a product of Philmac's unrelenting commitment to continuous improvement and a culture based on innovation and ingenuity.





# Benefits

**Self aligning inserts:**  
Philmac Rural inserts are self aligning. Simply bring the insert into the body of the fitting and then tighten the nut with a wrench. As the nut tightens it will draw the insert into the body of the fitting to create the perfect seal every time.

**Easy disassembly:**  
Philmac Rural can be easily disassembled and reconnected simply by loosening the nut and taking the insert out of the body of the fitting. The pipe can then be freed.

**Interchangeability:**  
Rural bodies are interchangeable with Safelok® and 3G® Metric.

**Unique Terracotta insert design:**  
The flat face of the insert allows the installer to tap it into the pipe with ease.


**Proven Performance:**  
Philmac Rural has been a market leader in Australia for over 20 years, with a strong track record of performance in tough Australian conditions.

# How it works


## PRINCIPALS OF OPERATION - COMPRESSION FITTINGS



### FULLY OPEN - RURAL

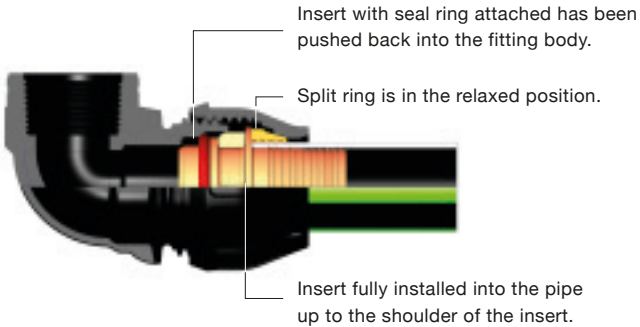

### FULLY CLOSED - RURAL

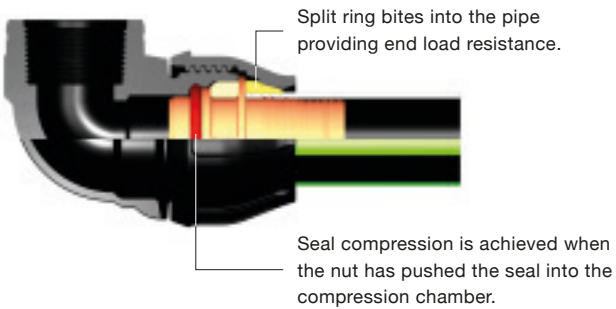

## EASY INSTALLATION



*Cut the pipe square and place the nut and grip ring on to the pipe.*



*Tap the insert fully into the pipe.*



*Position the insert in the body of the fitting, position the grip ring and nut and tighten by hand.*



*Tighten the nut with a wrench.*

