

esybox LINE



WATER
BOOSTING



GARDENING &
IRRIGATION




RAINWATER




AGRICULTURE

MODULARITY AND CONNECTIVITY
THE REVOLUTION OF WATER PRESSURISATION



NEW

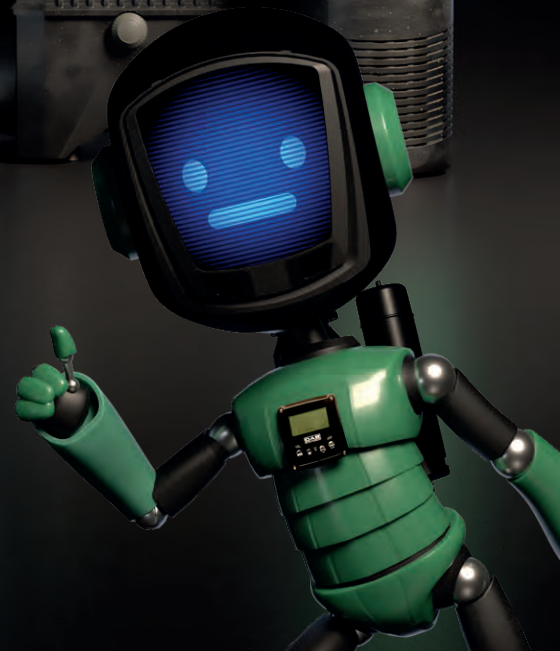

Designing and manufacturing **water pumping systems** for over 50 years!

With an Italian passion for innovation and quality, DAB has a proven brand reputation for trusted reliability across an extensive range of motor-driven water pumps.

Today, DAB is recognised in Australia, New Zealand and globally, as one of the leading pump companies in the world. With production of more than 2 million motor-driven water pumps each year, DAB offers a complete line of pumping solutions that meet even the most specific requirements, while ensuring the highest degree of reliability and local technical support.

DAB is a major player in the sector of technologies for the movement and management of our most precious resource, water.



"Simple and efficient solutions are the biggest types of innovations. The technology of our products speaks the same language of those who buy or use them. This is our strength."

Sandro Stramare DAB Group CEO

4 MEET THE ESYBOX LINE

What makes the EsyBox Line special

6 ESYBOX POP

Meet DAB's smallest pump, the newest edition in the EsyBox Line family

8 ESYBOX MINI³

Compact automatic pressurisation system

9 ESYBOX

Automatic pressurisation system

10 ESYBOX MULTI-PUMP SYSTEMS

Need more performance, EsyBox comes with a range of multi-pump solutions

10 ESYTANK RANGE

EsyTank is designed as a break tank between mains and EsyBox creating an all-in-one solution

11 ESYBOX DIVER

Submersible pump with integrated variable frequency drive

12 ESYBOX MAX

Modular integrated pumping system

14 ESYBOX LINE ACCESSORIES

A wide range of accessories to customise your EsyLine product to suit almost any application

16 ESYBOX LINE COMPARISON CHART

A high level comparison of the full EsyBox Line range

18 H2D APPLICATION

Learn how you can enhance your EsyBox Line product by utilising the H2D application

esybox LINE

Like a work of art

Attention to detail and a design that goes beyond the image, always ready to respond to market challenges.



Accessories and products come together to create a complete set, now enhanced with the **new 300-litre and 500-litre tanks for ESYBOX and ESYBOX Mini³**, as well as **the new Dock for ESYBOX Mini³ and ESYBOX Pop**.



RELENTLESSLY ALWAYS ONE STEP AHEAD

After EsyBox Max and EsyBox Mini³, EsyBox also comes with integrated WiFi module. The docks have turned esybox into a real revolution, ensuring installation flexibility like never before. With the new double-dock and the new tank, EsyBox Mini³ can also count on the OSA “on site assembly” value.



BUILT-IN
CONNECTIVITY



THE FIRST OF ITS KIND

10 years ago, the concept of a fully integrated electronic booster set truly changed the rules of the game in the cold water industry, and now this concept has evolved, becoming much more than just a range of pumps. EsyBox means fully integrated electronic system ...in a box!

MODULAR AND SMART SYSTEMS

DAB believes in the value of modularity and expresses this belief by designing a range of integrated systems capable of covering different types of needs and raise water management services in residential and commercial buildings to a whole new level.



EsyBox Pop: maximum pressure, minimum size.

The latest revolution in the EsyBox Line: all of DAB's technology in a new lightweight, compact, all-in-one design.

The solution
**you've been
waiting for**

From its compact size to its smart management, EsyBox Pop is designed to simplify every step: from installation to maintenance, including setup and use.



Perfect pressure

Enjoy water that always flows at your perfect intensity. Even in multiple spots at once, without compromise.



All-in-one

EsyBox Pop has everything needed to work right out of the box. Simply plug & play - combined with accessories to adapt your specific needs.



Small but mighty

Compact yet technologically advanced. Low consumption and ultra-quiet operation. Smart connectivity ensures an optimal user experience.



Compact and light

EsyBox Pop looks great, but when needed, it's not afraid of tight spaces, whether it's a garage, basement or below basin.



Maximum versatility

With its compact size, reduced weight and rotatable fittings, EsyBox Pop can be installed in spaces where no other product can fit.



Quick maintenance

The modular design makes the pump easy to maintain. Components can be replaced quickly, reducing downtime and lowering service costs.



esybox pop

OUR MOST COMPACT - VARIABLE SPEED DRIVE

This electronic pressurisation system is designed for small residential environments for a single tap. Advanced components ensure high performance, which include: an anti-cycling feature that detects leaks by monitoring the frequency of starts and stops; an automatic shut-off mechanism that activates in the event of Dry-running; an anti-freeze system – to prevent ice formation in the hydraulic components, the pump activates when temperatures drop below 5°C; and a motor-protection technology to prevent issues from prolonged inactivity. Note; not self-priming.

The adjustable connections facilitate quicker, easier and more flexible installation. Integrated connectivity enables users to configure settings via a smartphone and access cloud services without the need for additional accessories. Additionally, the remote control uses H₂D technology to view and manage comfort features and parameters.

Sound pressure: 40db(A)


Measured at 1m distance
in "good night" mode

WINNER OF A




ANTI-FREEZE
PROTECTION

122 mm



209 mm

225 mm




KEY FEATURES:

- Sound-absorbing ABS protective casings
- Technopolymer impellers
- Non-return valve with integrated temperature, flow and pressure sensors
- Water-cooled permanent magnet motor, ensuring quiet operation making it particularly suitable for home use

APPLICATIONS:

- Apartments, especially on top floors where pressure often drops
- Granny flats and micro housing
- Residential bathroom extensions
- Areas in the home affected by water rationing
- Single taps with low pressure
- Backyard toilets

PERFORMANCE CURVE:

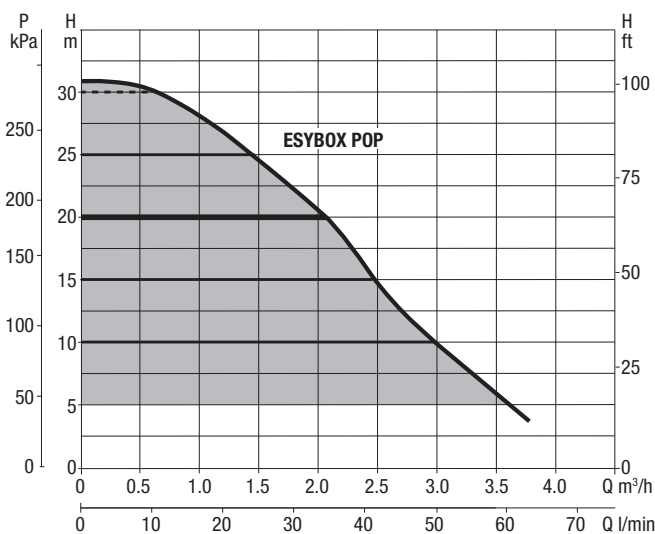

H₂D is the new smart platform, available as a mobile app or in a desktop version, that reveals what is happening inside the installations, allowing to optimise operations and save resources. Data and subscription charges may apply.



OPERATING CONDITIONS:

Maximum System Pressure	7.5 bar (750 kPa)
Maximum Operating Pressure	6 bar (600 kPa)
Liquid Temperature	0° to 50° C
Maximum Ambient Temperature	≤50° C
Max Head	32m
Max Flow	65 l/min

ELECTRICAL DATA:

Voltage	230V, 50 - 60 Hz
Protection Level / Insulation Class	IP X5 / F

CONSTRUCTION:

Materials	Composite outer casing Stainless-steel shaft Technopolymer impeller and diffusers
-----------	---

Part Number	Item Code	Power (out)	1-Ph In	Water Temp	Connections		Weight	Dimensions			Taps*
		kW	A		Inlet	Outlet		W	D	H	
DAB-ESYBOXPOP	813689	0.3	1.5	0 to 50	3/4"	3/4"	4.9	122	225	209	1-2
ACCESSORIES											
DAB-ESYDOCKPOP	813690	Dock with adjustable connections to suit any plumbing configuration. Allows for faster, easier and more flexible installation.									
DAB-ESYWALLPOP	813691	Wall-mounting kit including bracket, screws and plugs.									

*Taps calculated at 10 l/min @2.5 bar


Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.



esybox mini³

WHEN SIZE MATTERS - VARIABLE SPEED DRIVE

EsyBox Mini³ is the DAB compact automatic pressurisation system for the water supply of a single dwelling. EsyBox Mini³ guarantees the comfort of constant pressure (Pressure Set Point adjustable from 1 up to 5.5 bar) inside the system, and energy savings thanks to the inverter technology. EsyBox Mini³ does not require any additional components for its installation. Suitable for use with potable water in domestic systems and gardening applications.



MINIMUM SPACE REQUIREMENTS, MAXIMUM EFFICIENCY

Small and extremely compact, EsyBox Mini³ can also be installed under the kitchen sink, without compromising on high performance and maintains constant pressure throughout the home and garden.



SO QUIET (AND RELIABLE) THAT YOU CAN FORGET ABOUT IT.

The water-cooled engine, inverter electronics, sound-proofed housing and the anti-vibration feet make it an extremely quiet booster pump that even defies the lightest sleeper.




APPLICATIONS

Apartments with up to 3 floors, 2 bathrooms and 50m² of garden.

Pumping water from:

- Wells down to 8m deep
- Rainwater collection tanks
- Tanks
- Mains pressure boosting



Esytwin Mini³ dock is the evolution of EsyBox, creating a connection between two pumps.

Twin docking station for EsyBoxMini³ (ESYTWINMINI³ - 812132)



Wall mounting bracket for EsyBox and EsyBoxMini³ (DAB-ESYWALL - 801122)



Now with 3 impellers for better performance and lower speed motor for quieter performance down to 45 dB

KEY FEATURES:


- Better energy saving
- Easy adjustment display
- Constant pressure for maximum comfort
- Ultra low noise
- Easy to use
- Compact design
- Integrated - All in 1 - With the exception of the suction and delivery pipes, it doesn't require any additional components for installation.



H2D is the new smart platform, available as a mobile app or in a desktop version, that reveals what is happening inside the installations, allowing to optimise operations and save resources.



PERFORMANCE CURVE:

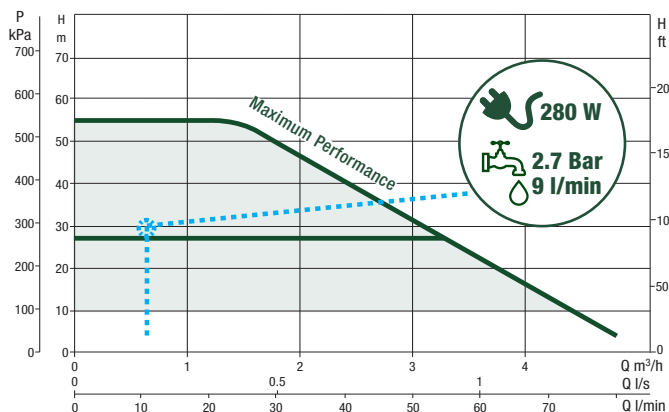

OPERATING CONDITIONS:

Maximum System Pressure	7.5 Bar (750 kPa)
Maximum Operating Pressure	5.5 Bar (550 kPa)
Liquid Temperature	0° to 40° C
Maximum Ambient Temperature	≤50° C
Pressure Vessel (tank)	2.0 Bar Pre-Charge (default)
Max Head	55m
Max Flow	80 l/min

ELECTRICAL DATA:

Voltage	240 V
Protection Level / Insulation Class	IP X4 / F

CONSTRUCTION:

Materials	Composite outer casing Stainless steel shaft Technopolymer impeller and diffusers
-----------	---

Part Number	Item Code	Power (in): kW	1 ph In	Water Temp	Connections		Dimensions			Taps*
			A	°C	Inlet	Outlet	W	L	H	
							mm			
DAB-ESYBOXMINI ³	805406	0.85	4.8	40	1" BSPF	1" BSPF	236	263	439	8


*Taps calculated at 10 l/min



esybox


THE FIRST OF ITS KIND - VARIABLE SPEED DRIVE

Leading the way in electronic pump technology, the EsyBox is a solution in domestic water supply. EsyBox is an automatic pressurisation system for water supply which guarantees the comfort for maximum pressure. Suitable for use with potable water, in domestic systems and gardening applications.



MODULAR

Creating two-pump sets has never been easier with the Esytwin quick connect station. Outstanding performance with a 50% smaller footprint than equivalent traditional systems.



A COMPLETE KIT

Esytank is a 480-litre tank that comes with Esydock, for quick installation of EsyBox above ground. Esytank is also modular: additional tanks can be installed on three sides.

WINNER OF A



Esytwin dock is the evolution of EsyBox, creating a connection between two pumps.
Twin docking station for EsyBox
(DAB-ESYTWIN - 801121)

APPLICATIONS

Houses and small apartment complexes with up to 6 floors and 9 apartments.

Pumping water from:

- Wells down to 8m deep
- Rainwater collection tanks
- Tanks
- Mains pressure boosting



HANDY TIP


Get the DAB-ESYDOCK to dock and un-dock the EsyBox in seconds for easy maintenance

KEY FEATURES:

- A self-priming multi-stage pump
- Variable frequency drive
- Electronics for control and management
- Pressure and flow sensors
- High-resolution LCD display
- 2 Litre integrated expansion vessel
- Flexible installation - can be installed horizontally or vertically

- Powerful performance flow up to 2 l/sec and head up to 6 bar
- Self priming up to 8 metres
- Dry run protection to stop pump damage if no water is present
- 2 Litre expansion tank protects against thermal fluctuations and reduces pump starts
- Over/under voltage protection and over current protection
- Wireless connectivity facilitates the creation of pressure booster sets and connection to other DAB devices

PERFORMANCE CURVE:

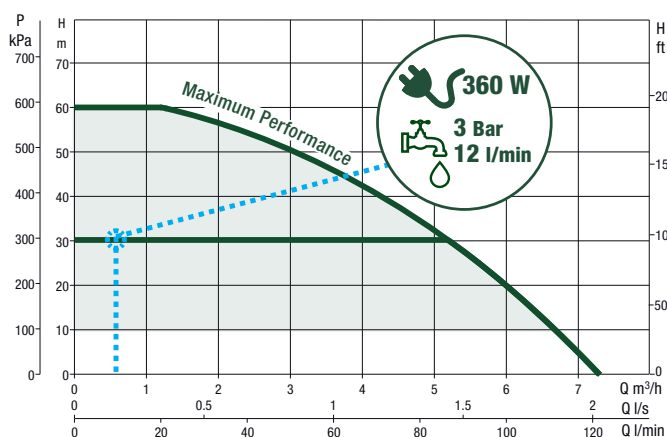

H2D is the new smart platform, available as a mobile app or in a desktop version, that reveals what is happening inside the installations, allowing to optimise operations and save resources. Data and subscription charges may apply.



OPERATING CONDITIONS:

Maximum System Pressure	Max. 8 bar (800 kPa)
Maximum Operating Pressure	6 Bar (600 kPa)
Liquid Temperature	0°C to 40°C
Maximum Ambient Temperature	≤50°C
Pressure Vessel (tank)	2.0 Bar Pre-Charge (default)
Max Head	65m
Max Flow	120 l/min

ELECTRICAL DATA:

Voltage	1 x 240V, 50 - 60 Hz
Protection Level / Insulation Class	IP X4 / F

Part Number	Item Code	Power (in): kW	1 ph In	Water Temp °C	Connections		Dimensions			Taps*
			A		Inlet	Outlet	W	L	H	
DAB-ESYBOX	800621	1.4	10	40	1" BSPF	1" BSPF	263	362	564	12

*Taps calculated at 10 l/min

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.

ESYBOX LINE MULTI-PUMP OPTIONS

EsyBox line kits are designed to create a connection between two to four pumps. These systems provide you a variety of advantages:

A BETTER, LONGER LIFE

- The kits ensure constant water supply thanks to the back-up function
- The new software algorithms constantly analyses the operation of the system, thus optimising alternating use of the three units

MORE POWER, LESS SPACE

- These kits offer exceptional performance thanks to combined operation with a 50% reduction in size compared to traditional units
- Updated model saves 11% energy compared to previous versions



EVERYTHING YOU NEED

- The wireless interface handles communication between the units
- Ensures hydraulic connection without the need for additional components for installation and operation
- Group operation visible on every display
- 1¼" suction and delivery fittings
- The Kits contain everything you need for assembly on site



Part Number	Item Code	Description	Amps
1 DAB-KITESYTWIN*	805158	Kit comprising 2 x EsyBox, 1 x E.sytwin for heads to 65m, flows to 210 l/min. Can be set up as duty assist or duty standby.	2 x 10A
2 DAB-KITESYTRIPLE*	805170	Kit comprising 3 x EsyBox, 3 x Esydock, 2 x manifolds for heads to 65m, flows to 315 l/min. Can be set up as duty assist, duty standby or a mixture of both.	3 x 10A
3 DAB-KITESYQUAD*	805159	Kit comprising 4 x EsyBox, 2 x E.sytwin, 1 x manifold for heads to 65m, flows to 420 l/min. Can be set up as duty assist, duty standby or a mixture of both.	4 x 10A

*Esyline kits are not shipped assembled

ESYTANK RANGE (TANK KIT ONLY)

Esytank is designed as a break tank between mains and EsyBox. It has a net capacity of 300 - 500 litres and is suitable for drinking water. It has a valve for filling from the mains with a float and an overflow system. The tank is complete with an Esydock, a suction pipe with footvalve and a delivery pipe.



DAB-ESYMINITANK500
812135



DAB-ESYMINITANK300
812134



DAB-ESYTANK300
812133



DAB-ESYTANK500
805121

Pump sold separately.

Part Number	Item Code	Description	Included	Dimensions (mm)
DAB-ESYMINITANK300	812134	300L tank suitable for DAB EsyBox Mini ³	EsyTank, EsyDock, suction pipe with footvalve and delivery pipe	810 x 570 x 1150
DAB-ESYMINITANK500	812135	500L tank suitable for DAB EsyBox Mini ³		870 x 600 x 1660
DAB-ESYTANK300	812133	300L tank suitable for DAB EsyBox		810 x 570 x 1150
DAB-ESYTANK500	805121	500L tank suitable for DAB EsyBox		870 x 600 x 1660

esybox DIVER



THE FUTURE OF WATER PRESSURISATION

The new EsyBox Diver variable speed submersible pump guarantees benefits for installers and end users to help save space, energy, time and money thanks to DAB's technical and technological expertise. Suitable for pressurisation, rainwater re-use, gardening and irrigation activities in residential building service.

The EsyBox Diver is a 7 inch multi-impeller electronic pump with variable frequency drive to be used for clean water applications such as wells and tanks. The pump can be used submerged, partially submerged or out of the tank with the DOC68 accessory (supplied separately).



VERSATILE AND FLEXIBLE

One model and a set of accessories offer the performance of a complete range: Standard version for cistern or well installation, Dry version for surface installation, and X version for the extraction of clean water from wells.



HYPER-CONNECTED

H2D delivers a completely new experience in terms of system monitoring and function management, even remotely. H2D is an indispensable work tool to simplify daily routines and guarantee maximum confort.

APPLICATIONS



- Domestic households
- Household water supply
- Garden and irrigation
- Inside rainwater tanks
- Small apartment complexes (up to 6 floors and 9 apartments)

WINNER OF A




KEY FEATURES:

- Integrated non-return valve
- Stainless steel handle for easy transport
- Adjustable suction height up to 8cm
- Connectable float (optional accessory)
- Water level sensor (optional accessory)
- NFC (Near Field Communication) pocket
- Built in expansion tank
- Wi-Fi enabled (offsite access via subscription service)
- DConnect Box 2 so you can control the pump from your smart device



PERFORMANCE CURVE:

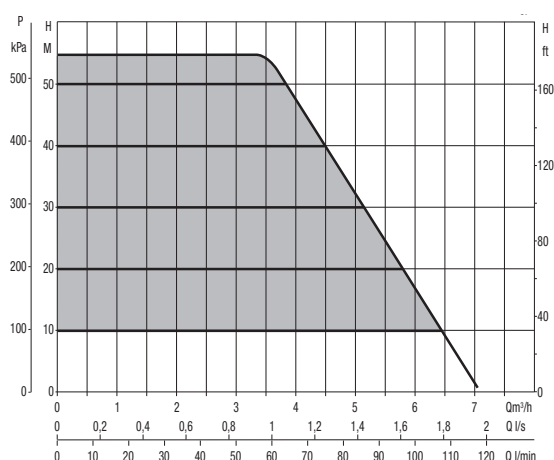

OPERATING CONDITIONS:

Maximum System Pressure	Max. 5.5 bar (550 kPa)
Maximum Operating Pressure	5.5 Bar (550 kPa)
Liquid Temperature	0°C to 55°C
Maximum Ambient Temperature	≤55°C

ELECTRICAL DATA:

Voltage	220-240V 5.5Amp
Power (in) :1300W / Power (out): 950W	
Protection Level	IP68
Insulation Class	F

CONSTRUCTION:

Materials	Technopolymer outer casing Motor shaft AISI 303 Technopolymer impeller and diffusers
-----------	--

Part Number	Item Code	Power (out): kW	Volts	Max Head (m)	Max Flow (l/min)	Taps	Power Cable (m)
DAB-ESYBOXDIVER 55/120	808452	0.954	240	55	120	12	15
ACCESSORIES							
DAB-FLOAT	808453	Float for stopping the pump					
DAB-DOC68	808454	Dock for dry mount conversion kit					
DAB-DTRONLEVELSENSOR	808455	Measure water left in the tank					

esybox MAX

PURE INTEGRATION



EsyBox Max is the latest innovation in the DAB Esyline range. Integrated pumping systems for pressurisation in commercial building services industry and for rural and horticultural applications. Available in two power sizes, it consists of modular elements that allow different configurations to cover the needs of large residential, medium/large apartments and high rise buildings (even over 14 floors).

OSA, ON SITE ASSEMBLY

Each component is assembled to deliver outstanding performance and user experience. EsyBox Max can be configured at the place of installation, combining up to 4 pumps together, to ensure every time a set perfectly suited for the installed utilities.



HYPER-CONNECTED

H2D delivers a completely new experience in terms of system monitoring and function management, even remotely. H2D is an indispensable work tool to simplify daily routines and guarantee maximum confort.



WINNER OF A



APPLICATIONS

Large residential households
Farms & rural properties
Apartments
(eg. 10 floors, 20 apartments)
Commercial & building services
(Hospitals, hotels & wineries)


KEY FEATURES:

- Easy to maintain and operate remotely*
*Compatible with the H2D service.
- Silent operation and compact
- Integrated inverter optimises performance and comfort, which saves money
- Constructed with recycled materials wherever possible
- Water cooled permanent magnet motor



Each unit consists of the single, double or triple connection base and the pumping units.
A four pumps system is available with the additional kit to connect two double bases.

PERFORMANCE CURVE:

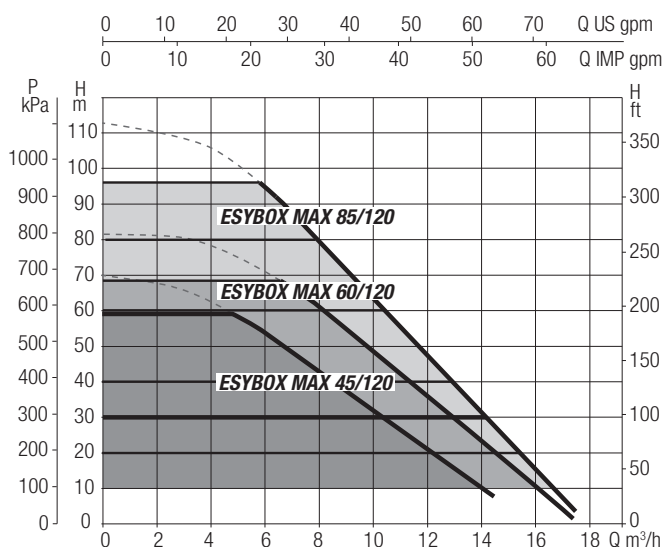

H2D is the new smart platform, available as a mobile app or in a desktop version, that reveals what is happening inside the installations, allowing to optimise operations and save resources. Data and subscription charges may apply.



OPERATING CONDITIONS:

Maximum Inlet Pressure	Max. 5 bar (500 kPa)
Maximum Operating Pressure	12 Bar (1200 kPa)
Liquid Temperature	0 - 50°C
Maximum Ambient Temperature	≤55°C
Constant Pressure Range	1-12 Bar (3 bar by default)

ELECTRICAL DATA:

Voltage	Single Phase: 208-240V 50/60 Hz Three Phase: 380-480V 50/60 Hz
Protection Level	IPX5
Insulation Class	F

CONSTRUCTION:

Materials	Technopolymer outer casing Motor shaft AISI 303 Technopolymer impeller and diffusers
-----------	--

ESYBOX MAX PUMP AND DOCK KITS



AS QUICK AS A "CLICK"

Install Esydock into your pipework system and simply "plug" your pumps in. A final quick set up via the H2D app completes your installation project.



EASY TO MOVE & INSTALL

Keeping it flexible, we have the On-Site Assembly concept. So if you have difficulties getting to the pumps location, due to narrow stairways and corridors etc, you can choose to assemble your booster on-site which will only require moving smaller lighter boxes into the location then carry out our quick assembly steps.



Part Number	Item Code	kW (P2)	Max Head (m)	Max Flow (l/min)	Inlet (BSPF)	Outlet (BSPF)	Taps	Power Cable	Volts (V)	Amps			
DAB-1ESYBOX-MAX-45/120M	811682	1.97	52	290	¼" - 2"	¼" - 2"	29	3-pin 15A	240	9.4			
DAB-1ESYBOX-MAX-45/120T	811683							N/A	415	3.4			
DAB-1ESYBOX-MAX-60/120M	809535	2.2	69	290	1¼" - 2"	1¼" - 2"		3-pin 15A	240	11.5			
DAB-1ESYBOX-MAX-60/120T	809536							N/A	415	4.4			
DAB-1ESYBOX-MAX-85/120T	809537	3	96							5.6			
DAB-2ESYBOX-MAX-45/120M	811684	1.97	52	580	2"	2"	58	2 x 3-pin 15A	240	2 x 9.4			
DAB-2ESYBOX-MAX-45/120T	811685							N/A	415	2 x 3.4			
DAB-2ESYBOX-MAX-60/120M	809538	2 x 2.2	69	580				2 x 3-pin 15A	240	2 x 11.5			
DAB-2ESYBOX-MAX-60/120T	809539							N/A	415	2 x 4.4			
DAB-2ESYBOX-MAX-85/120T	809540	2 x 3	96							2 x 5.6			
DAB-3ESYBOX-MAX-45/120M	811686	1.97	52	870			87	3 x 3-pin 15A	240	3 x 9.4			
DAB-3ESYBOX-MAX-45/120T	811687							N/A	415	3 x 3.4			
DAB-3ESYBOX-MAX-60/120M	809541	3 x 2.2	69	870				3 x 3-pin 15A	240	3 x 11.5			
DAB-3ESYBOX-MAX-60/120T	809542							N/A	415	3 x 4.4			
DAB-3ESYBOX-MAX-85/120T	809543	3 x 3	96							3 x 5.6			
DAB-4ESYBOX-MAX-45/120M	811688	1.97	52	1160			116	4 x 3-pin 15A	240	4 x 9.4			
DAB-4ESYBOX-MAX-45/120T	811689							N/A	415	4 x 3.4			
DAB-4ESYBOX-MAX-60/120M	809853	4 x 2.2	69	1160				4 x 3-pin 15A	240	4 x 11.5			
DAB-4ESYBOX-MAX-60/120T	809854							N/A	415	4 x 4.4			
DAB-4ESYBOX-MAX-85/120T	809855	4 x 3	96							4 x 5.6			

ACCESSORIES

Part Number	Item Code	Description	Amps
DAB-E2G5.2M	809529	Optional Electrical connection panel for 2 Single-phase EsyBox Max pumps complete with magnetothermic switches for powering multi-pump units. It can be installed on the wall or directly to EsyBox Max units using the dedicated pillar kit.	2 x 16
DAB-E2G7T	809530	Optional Electrical connection panel for 2 Three-phase EsyBox Max pumps complete with magnetothermic switches for powering multi-pump units. It can be installed on the wall or directly to EsyBox Max units using the dedicated pillar kit.	2 x 10
DAB-E3G10.5T	809531	Optional Electrical connection panel for 3 Three-phase EsyBox Max pumps complete with magnetothermic switches for powering multi-pump units. It can be installed on the wall or directly to EsyBox Max units using the dedicated pillar kit.	3 x 10
DAB-MAX KIT PILLAR	809532	Useful for mounting the control panel EG on board of the 2 or 3 Esydock max. The pillar consists of a column, a bolt and a lower clamping bracket (all in steel).	N/A
DAB-MAX ESY I/O	809533	The electronic expansion module allows EsyBox Max to interface with the external input/output devices (eg: float switch, pressure switch, remote alarm) and with the BMS world (Building Management System).	
DAB-ESYBOXMAXJOINTKIT	809534	Kit consisting of 2 x 3-piece unions, 2 x 2" nipples to connect the delivery and suction of 2 x Esydocks to create a 4 unit EsyBox Max system.	

ESYBOX LINE ACCESSORIES


The accessories and the possibility of combining products together make the EsyBox line fully flexible and versatile: Customise your EsyBox Line product to suit a wide range of applications with many operating modes making it the most revolutionary and efficient line in the field of residential water pressurisation and in commercial and public buildings.

Part Number	Item Code	Description	COMPATIBLE WITH					Image
			EsyBox Pop	EsyBox Mini ³	EsyBox	EsyBox Diver	EsyBox Max	
DAB-ESYDOCK	801120	Docking station for EsyBox. Quick connection base with 4 hydraulic configuration possibilities.	☐	☐	☒	☐	☐	
DAB-ESYTWIN	801121	Twin docking station for EsyBox. Quick connection base for the 2-pump sets with 4 hydraulic configuration possibilities.	☐	☐	☒	☐	☐	
DAB-ESYTWINMINI3	812132	Twin docking station for EsyBox Mini ³	☐	☒	☐	☐	☐	
DAB-ESYDOCKMAX	809526	EsyBox Max single dock	☐	☐	☐	☐	☒	
DAB-2ESYDOCKMAX	809527	EsyBox Max twin dock	☐	☐	☐	☐	☒	
DAB-3ESYDOCKMAX	809528	EsyBox Max triple dock	☐	☐	☐	☐	☒	
DAB-ESYDOCKPOP	813690	Dock with adjustable connections to suit any plumbing configuration. Allows for faster, easier and more flexible installation.	☒	☐	☐	☐	☐	
DAB-ESYWALL	801122	Wall mounting bracket for EsyBox and EsyBox Mini ³	☐	☒	☐	☐	☐	
DAB-WALLPOP	813691	Wall-mounting kit for the Pop that includes bracket, screws and plugs.	☒	☐	☐	☐	☐	
DAB-MAXKITPILLAR	809532	Mounting bracket for attaching the electric control panel to the 2 or 3 pump set.	☐	☐	☐	☐	☒	
DAB-DTRONLEVELSENSOR	808455	Measure water left in the tank	☐	☐	☐	☒	☐	
BIA-TSHKITA	701034	Pump kit hose rainwater tank suction and float	☐	☐	☐	☒	☐	

ESYBOX LINE ACCESSORIES (CONTINUED)

Part Number	Item Code	Description	COMPATIBLE WITH					Image
			EsyBox Pop	EsyBox Mini ³	EsyBox	EsyBox Diver	EsyBox Max	
DAB-ESYBOX MAX I/O	809533	Control box for building management systems integration	☐	☐	☐	☐	☒	
DAB-ESYLINK-KIT	802435	Wireless connection for EsyBox	☐	☒	☒	☐	☐	
DAB-E2G5.2M	809529	Electric control panels for the powering of multi-pump sets.	☐	☐	☐	☐	☒	
DAB ESYGRID	805400	The grid kit for the protection of the E.SYBOX against the entry of insects and particles	☐	☐	☒	☐	☐	
DAB-ESYTANKCOUPLING	805781	For connecting two Esytanks	☐	☐	☒	☐	☐	
DAB-SSP00000630	805091	Brass Unions for EsyBox and EsyBox Mini ³ Kit	☐	☒	☒	☐	☐	
DAB-ESYCOVER-ESYBOX	808029	Suits the EsyBox. Colour: Green	☐	☐	☒	☐	☐	
DAB-ESYCOVER-ESYBOXMINI	808030	Suits the EsyBox Mini ³ Colour: Green	☐	☒	☐	☐	☐	
DAB-ESYLINEPUMPCOVER	807945	Robust pump cover that suits EsyBox Mini ³ installed horizontally or vertically and EsyBox installed vertically. Supplied as cover only - No base included. Colour: Rivergum - Wilderness	☐	☒	☒	☐	☐	

ESYBOX LINE COMPARISON CHART

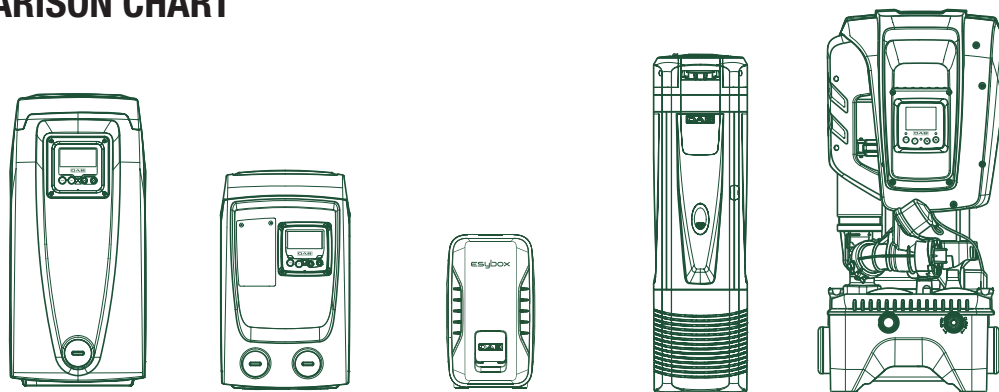

FEATURES

	EsyBox	EsyBox MINI³	EsyBox POP	EsyBox DIVER	EsyBox MAX
	OPERATING RANGE MAX FLOW: 120 l/min MAX HEAD: 65m				
	H2D COMPATIBLE WITH ALL MODELS				
	COMMUNICATION PROTOCOLS WI-FI				
	CERTIFICATIONS Watermark, WRAS, NSF61, Approved for Drinking Water				
	INVERTER INTEGRATED WITH ALL MODELS				
	DISPLAY HIGH RESOLUTION LCD, 70x40 mm				
	DIMENSIONS (cm) & WEIGHT (Kg) 26 L X 35 D X 56.5 H* 27 Kg				

* VERTICAL INSTALLATION (Possibility of horizontal installation)

SUITABLE FOR PUMPING WATER FROM

	WELLS UP TO 8 M DEEP	■	■	□	■	□
	TANKS	■	■	■	■	■
	RAINWATER COLLECTION TANKS	■	■	■	■	□
	MAINS WATER (Where permitted by law)	■	■	■ (max 2 bar inlet pressure)	□	■

ALL AROUND THE WORLD

ESYLINE PRODUCTS ARE USED
GLOBALLY ACROSS MANY
APPLICATIONS – HELPING MAKE
WATER MANAGEMENT **EASIER**

GARDENING & IRRIGATION



WATER PURIFYING



HYDROPONIC




WATER BOOSTING



RAINWATER REUSE



GREY WATER REUSE



HO.RE.CA.



WORK JUST GOT SMARTER

H2D SIMPLIFIES WORK ROUTINES: IT'S THE IDEAL TOOL FOR MEETING CUSTOMER NEEDS IN AN INSTANT AND GROWING YOUR BUSINESS.



H2D TOOLS DELIVER PROFESSIONAL OUTCOMES AND BENEFITS FOR ALL

Improving workflows means freeing up time to focus on other areas of your business. By choosing H2D, you improve customer service, reduce the number of emergencies and grow your business, effortlessly.



OPTIMISE TIME AND WORK

On-site work is no longer always required: H2D allows systems to be controlled remotely and, where needed, work on site is easier to plan.



LITTLE OR NO DISRUPTION

Remote monitoring reports faults in real time and allows you to address potential issues before they become a problem, and take prompt remedial action where required, ultimately reducing any disruption.



SATISFIED CUSTOMERS

With parameters optimised remotely, consistently smooth system operation is assured: the customer will never experience water issues again.



PROBLEM FIXED FIRST TIME, EVERY TIME

When there's no choice but to go to site, H2D provides all the info you need to prepare the job beforehand for a quick and permanent fix, so the technician can get everything done in one go.



MORE SERVICE AND LESS URGENT CALLOUTS = INCREASED PROFIT

With remote control of systems, it's easy to offer 24/7 monitoring and preventive maintenance services. Systems are less prone to faults and emergencies, meanwhile your business grows.



BENEFITS FOR EVERY USER

Having satisfied customers is a real joy, as well as a point of professional pride: with H2D, it's easy to keep house, apartment and small business owners and condominium property managers happy.

...AND FOR YOUR HOME TOO!

NOT JUST FOR PROFESSIONALS: H2D IS FOR EVERYONE WHO LIVES IN THE HOME. THANKS TO INTELLIGENT FEATURES, IT TAKES COMFORT TO THE TOP, MONITORS CONSUMPTION AND DETECTS ANY IRREGULARITIES.



POWER SHOWER

To turn a regular shower into a "power shower", you need to boost water pressure to the max. H2D lets you increase pressure parameters just for the time it takes to shower, while reducing usage for the rest of the day. Comfort guaranteed, every time.



GOOD NIGHT

During the night, when even a slight buzz can sound noisy, you can turn on sleep mode, switching the already super quiet pump to whisper-quiet operation.



OVERVIEW

On H2D, you can get a real-time overview of your usage and the operating status of your system: if something's not right, contact customer support right away.



SMART HOME

If you prefer, you can control comfort modes simply by talking to Alexa and Google Home voice assistants. Even while you're in the shower



Getting started and using H2D is easy: download the app, create your profile and off you go!



H2D SUBSCRIPTIONS: BASIC AND PREMIUM PLANS

The app offers a free set of functions and becomes an irreplaceable working tool thanks to the available subscription solutions.



PROFESSIONALS

	BASIC	PREMIUM
REMOTE MONITORING BASIC PARAMETERS	✓	✓
REMOTE MONITORING AND CONTROL ALL PARAMETERS		✓
ALARMS: VIEW AND EXPORT (PDF, CSV)	Last alarm	Complete alarm log
IN-APP PUSH NOTIFICATIONS ALARMS AND EXPIRY DATES	✓	✓
SHARE OR TRANSFER INSTALLATION	Max. 2 users	Max. 10 users
COMPARE CURRENT / PREVIOUS MONTH CONSUMPTION	✓	✓
ANNUAL CONSUMPTION HISTORY (DAY, WEEK, MONTH)		✓
PDF DEVICE INSTANT REPORTING		✓



END USERS

	BASIC	PREMIUM
COMPARE CURRENT / PREVIOUS MONTH CONSUMPTION	✓	✓
ANNUAL CONSUMPTION HISTORY (DAY, WEEK, MONTH)		✓
COMFORT FUNCTIONS: POWER SHOWER, GOOD NIGHT MODE	✓	✓
HOME ASSISTANTS (ALEXA, GOOGLE HOME)	✓	✓
ALARM DISPLAY	Last alarm only	Complete alarm log
IN-APP PUSH NOTIFICATIONS	✓	✓
REMOTE MONITORING BASIC PARAMETERS	✓	✓
CONTROL BASIC PARAMETERS		✓



DAB ESYBOX LINE RANGE PRODUCT BROCHURE

Available from your local DAB distributor:

WHITE INTERNATIONAL PTY LTD

60 Ashford Avenue
Milperra NSW 2214
Phone: 02 9783 6000
Customer Service: 1300 783 601
Email Sales: pumpsales@whiteint.com.au
www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue
East Tamaki, Auckland 2013
Phone: 09 579 9777
Customer Service: 0800 509 506
Email Sales: sales@whiteint.co.nz
www.whiteint.co.nz



**Please always refer to our website for further
technical information & new product innovations**

Scan QR Code on your
smart phone or iPad to
save a digital version.



© 2026 Copyright White International Pty Ltd

TM ® - WARNING: Please be aware that various brands & products depicted within this document are subject to trademark, patent or design registrations. Infringement of any intellectual property contained within this document without express written authority by the appropriate intellectual property holder may result in further legal action to be taken. For any queries regarding use of the contained information please feel free to contact White International Pty Ltd.